

Programmable Controllers
MELSEC-L series

Little on size, Large on performance

The new L series has a small footprint and is loaded with features.

Simple!



MELSEC *L* series

Simple

MELSEC *L* series

Convenience that fits in the palm of your hand.

The L series is the latest in a long line of MELSEC products renowned for exceptional performance and rock solid reliability.

Get the performance, functions, and capabilities required for today's most demanding applications in an incredibly small package.

MELSEC-L series greatly expands the range of functionality traditionally associated with compact programmable controllers and through user-centric design, pushes the limits of ease of use.



Maximum Functionality

The CPU module contains a diverse range of control functions.

A large variety of I/O types and features are built-in for convenience. Due to an abundance of advanced functionality, L series CPUs are flexible enough to meet a wide variety of needs.

Maximum Performance

High speed, large memory capacity CPU

The CPU has a basic operation processing speed of 9.5ns*4 and 260K steps*5 of program capacity are available for complex programs and equipment control.

Maximum Capabilities

Advanced capabilities focused on improving efficiency

The user-friendly display unit enables routine operations to be made without a computer. An SD memory card slot*3 is included as standard for data logging and program storage. Write programs and manage L series controllers using GX Works2 and iQ Works, the most advanced and effective software for Mitsubishi controllers yet.

*1: Option (sold separately)

*2: Included with L26CPU-(P)BT

*3: Included with L02CPU-(P), L06CPU-(P), L26CPU-(P), L26CPU-(P)BT

*4: For L06CPU-(P), L26CPU-(P), L26CPU-(P)BT

*5: For L26CPU-(P), L26CPU-(P)BT

■ Built-in I/O Features →P.5

| | | |
|-----------------|---------------------|-------------|
| Positioning | High-speed Counter | Pulse Catch |
| Interrupt Input | General-purpose I/O | |

Every L series CPU module comes with 24 points of built-in I/O that support advanced features to meet challenges head on.

■ Built-in Connectivity →P.7

| | | |
|-------------------|-----|------------------|
| Ethernet | USB | SD Memory Card*3 |
| CC-Link Ver.2.0*2 | | |

Convenient communication options and memory card storage are included with every CPU.

■ High-speed CPU →P.15

| | | |
|--|---|--------------------------|
| Program Memory 260 K steps*5 | Maximum number of I/O points 8192 points | |
| Basic operation processing speed 9.5 ns*4 | Floating-point operation 0.057 μs | MOV instruction 19 ns |

L series raises the bar for performance specifications in a compact programmable controller with 260K steps of program memory and a basic operation processing time of just 9.5 nanoseconds.

■ Display unit →P.13


| | |
|---|--|
| Multi-lingual Display English/Japanese | |
| Display Size 16 characters x 4 lines | Multi-color Backlight Green(Normal), Red(Error) |

The display unit allows for quick troubleshooting and diagnostic operations of the CPU and connected modules.

■ Software →P.57

| | | |
|-----------|----------|--------------|
| GX Works2 | iQ Works | GX LogViewer |
|-----------|----------|--------------|

L series is compatible with the latest and most advanced programmable controller engineering software from Mitsubishi.

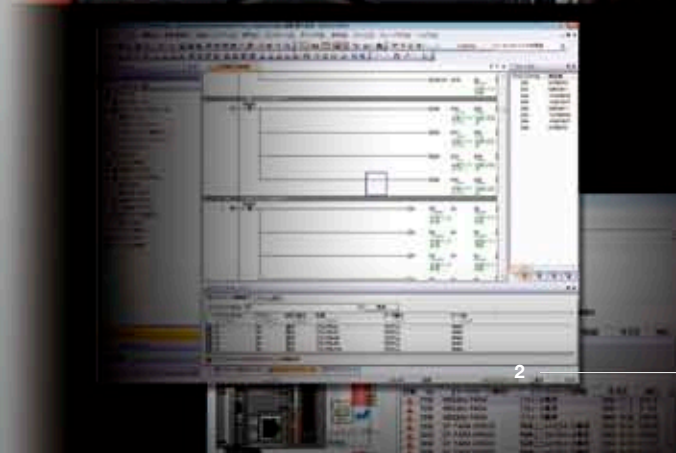



■ Compact Design →P.9

| | | |
|----------------------|----------------------------|----------------------|
| Integrated backplane | Mount on standard DIN rail | For extension system |
|----------------------|----------------------------|----------------------|

By eliminating the need for a separate backplane base unit, system design flexibility has been improved and overall size has been reduced.

MELSEC *L* series



■ Simple Motion Modules →P.41

| | | |
|-----------------------|---------------------|------------------------------|
| Positioning | Speed Control | Torque Control |
| 16-Axis Interpolation | Synchronous Control | Auto cam generation function |

Control sophisticated motion applications with ease using proven and innovative features.



■ Analog Modules →P.27

| | |
|-----------------------------------|---------------------|
| Conversion Speed 20 μs/Channel | Precision ±0.05% |
|-----------------------------------|---------------------|

Shorten cycle times using high-speed analog conversion modules that operate at 20μs per channel.

■ Temperature Control Modules →P.37

| | | |
|--|-----------------------------------|------------------------|
| Heating-cooling control | Peak current suppression function | Self-tuning function |
| Simultaneous temperature rise function | Selectable sampling cycle | Temperature input mode |

Temperature control module with highly stable regulation performance.




CC-Link IE *Field*
CC-Link *V2*
CC-Link/*LT*



■ Network Modules →P.47

| | | |
|------------------|-----------------|----------------------|
| CC-Link IE Field | CC-Link Ver.2.0 | CC-Link/LT |
| SSCNET III/H | Ethernet | Serial communication |

Supports the FA network standard.
*: The L26CPU-BT and L26CPU-PBT have CC-Link built-in.

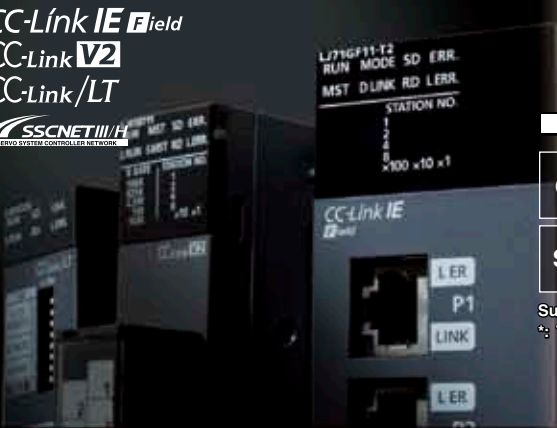

GOT2000
Graphic Operation Terminal

■ GOT2000 Series →P.67

| | | |
|--------------------------|----------------------------|------------------|
| MELSEC-L Troubleshooting | Intelligent Module Monitor | Backup / Restore |
| Log Viewer | Sequence Program Monitor | Device Monitor |

New GOT models have been designed with connection to L series in mind. When used together, several template screens are available to enhance their combined operational functionality.

L series Features
P.5

CPU
P.15

I/O
P.23

Analog/Temperature Control
P.27

Simple Motion/Positioning
P.41

High-Speed Counter
P.46

Network
P.47

Software
P.57

Related Products
P.67

Flexible

The L series has the ability to flex to meet your application's requirements.

MELSEC L series has been designed with three key concepts in mind.

The first key is reliability.

Mitsubishi Electric products are world renowned for quality.

The second is ease of use.

We are committed enabling engineers and programmers to do their job as efficiently as possible to reduce costs.

The third key is flexibility.

L series systems expand to meet the application requirements without wasting money or space.

Save on total costs by designing the system that is a perfect fit.



L series Built-in I/O Features

Every L series CPU comes with 24 points of built-in I/O standard. These I/O points are capable of many functions usually reserved for separate modules. Save on system costs by using the built-in functions rather than relying exclusively on additional modules.

The built-in I/O*1 comes in sink or source type format and may be chosen based on the application.

■ L series CPU Built-in I/O Functions

| Positioning (Built-in control of 2 axes) | High-Speed Counter (Two channels built-in) | Pulse Catch | Interrupt Input | General-purpose Input/Output |
|---|---|--|-----------------|------------------------------|
| Function | | Features | | |
| Positioning*2 | Number of axes: Maximum 2 axes | Maximum speed: 200K pulses/s High-speed activation: 30µs (Shortest activation time) S-curve acceleration and deceleration are supported. | | |
| High-Speed Counter*2 | Number of channels: Maximum 2 channels | Maximum counting speed: 200K pulses/s Open collector, Differential line driver input High accuracy ON/OFF measurements with a resolution of 5µs High precision PWM control up to 200kHz (High speed pulse output) | | |
| Pulse Catch | Number of input points: 16 points | Minimum input response time: 10µs Pulse signals whose ON time is shorter than the scan time can be detected. | | |
| Interrupt Input | Number of interrupt points: 16 points | Built-in CPU provides high-speed processing. All input points support interrupt inputs. | | |
| General-purpose Input | Number of high-speed inputs: 6 points Number of standard inputs: 10 points | Minimum input response time of high-speed input: 10µs Minimum input response time of standard input: 100µs | | |
| General-purpose Output | Number of output points: 8 points | Output response time: 1µs or less | | |


*1: The L02SCPU, L02CPU, L06CPU, L26CPU and L26CPU-BT are sink type, and the L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P and L26CPU-PBT are source type.

*2: Points used by the positioning and high speed counting functions are fixed (as in A phase, B phase, near-point dog). Custom points for these functions may not be assigned.




Easy setup of built-in I/O functions


Configuring built-in I/O functions can be done easily by setting parameters using the programming tool.

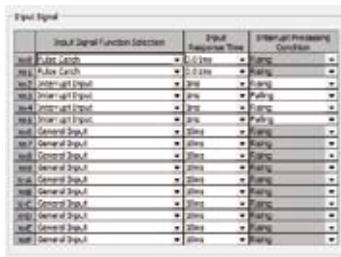

Built-in I/O function example parameter settings
Pulse Catch: 0.01ms (response time)
Interrupt Input: 1ms (response time)

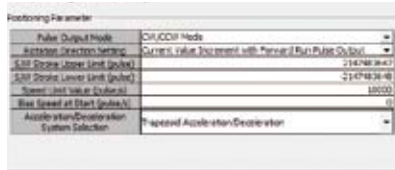

Positioning function example parameter settings
Pulse Output Mode: CW/CCW mode
Rotation Direction Setting:
Current Value Increment with Forward Run Pulse Output

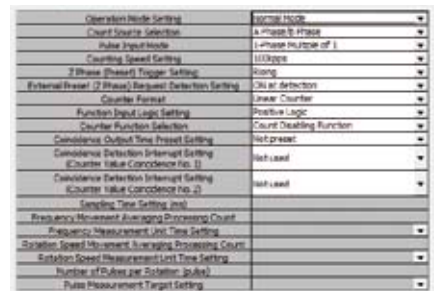

High-speed counter function example parameter settings
Pulse Input Mode: 1-Phase Multiple of 1
Counting Speed Setting: 100Kpps

Built-in CPU positioning control function


Positioning Function

The built-in positioning function has a start time of just 30µs with a maximum high speed output of 200K pulses per second.

Furthermore, it supports S-curve acceleration and deceleration for applications that require minimal machine vibration.

High-Speed Counter Function

Two channels support the high speed counting function. The differential line driver inputs support counting speeds up to 200K pulses per second.

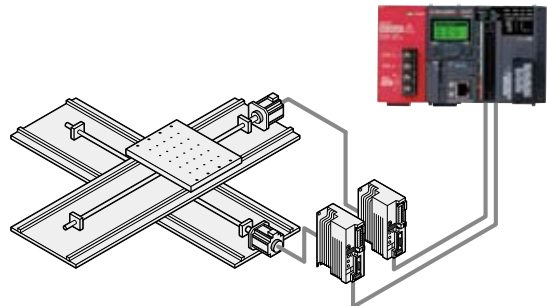

Positioning


High-Speed Counter

Make highly accurate measurements with a resolution of 5μs

High-Speed Counter

Using pulse measurement mode, where the input signal ON/OFF time is 200μs or greater, highly accurate measurements in units of 5μs or greater are possible.

For example it is possible to calculate length by knowing the "work object passing speed" and measuring the ON time of the sensor.

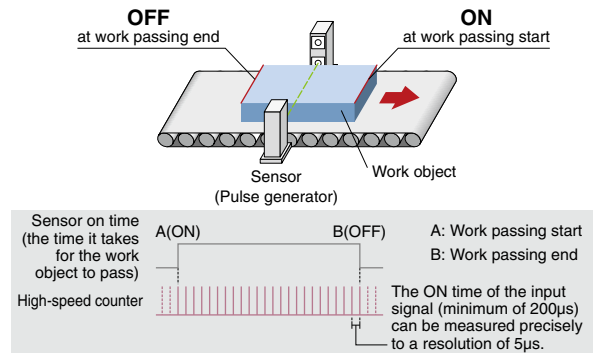


High precision PWM control up to 200 kHz

High-Speed Counter


Using the pulse width modulation control function of the high speed outputs, cycle times as fast as 5μs can be created. Simply input the ON time and cycle time to drive a wide range of devices from lighting dimmer control, motors, and heaters to precision inspection equipment requiring high resolution performance.

| Setting item | Setting Range | Description |
|-------------------------|-------------------------------|------------------------------------|
| PWM output ON time*1 | 0 or 10 to 10000000*1 (0.1μs) | Set the ON time of output pulse |
| PWM output cycle time*1 | 50 to 10000000*1 (0.1μs) | Set the cycle time of output pulse |

*1: The PWM output ON time must be ≤ the PWM output cycle time.

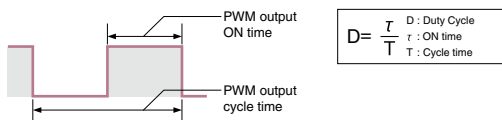

Lighting dimmer control using PWM output

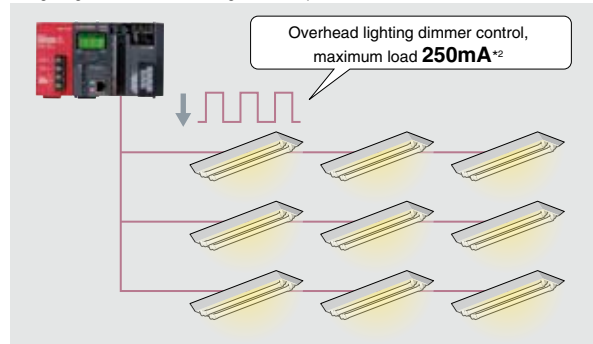


*2: In cases where the first six digits of the serial number are "120722" or later. Previous serial numbers of the CPU module are applied to 100mA.

Guaranteed input pulse detection

Pulse Catch


Typical programmable controller input devices are unable to detect pulse signals whose ON time is shorter than the scan time or do not occur during I/O refresh periods. The pulse catch function allows these signals to be reliably detected and passed to the sequence program. This function is different from the interrupt input function in that it does not require any special programming. Pulse catch inputs may be used in programs exactly the same as traditional input (X) signals.

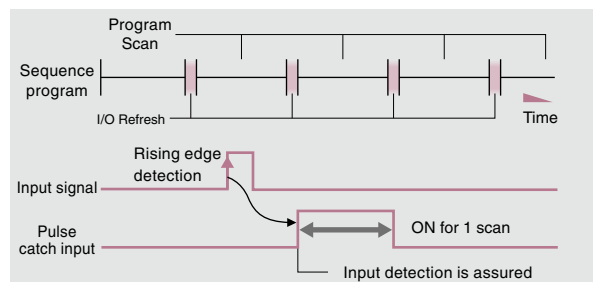

CPU with built-in CC-Link network connectivity


L26CPU-(P)BT

L series CC-Link ready CPUs are compatible with the latest generation of CC-Link devices and support connections with over 1,000 different product types. Without adding a module, these CPUs can perform high-speed communication with a maximum of 128 words*3 between a master station and a local station. CC-Link is the dominate FA network standard in Asia and continues to gain support worldwide.

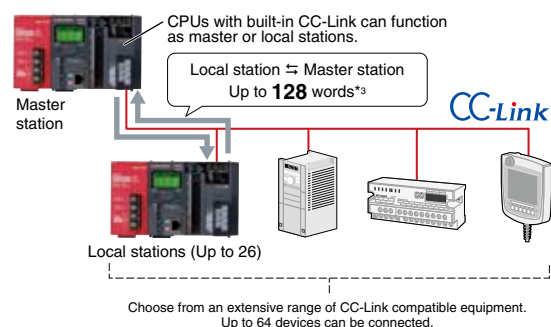


*3: When the number of occupied stations is 4 and the extended cyclic setting is octuple in the Remote net Ver.2 mode.

L Series Features

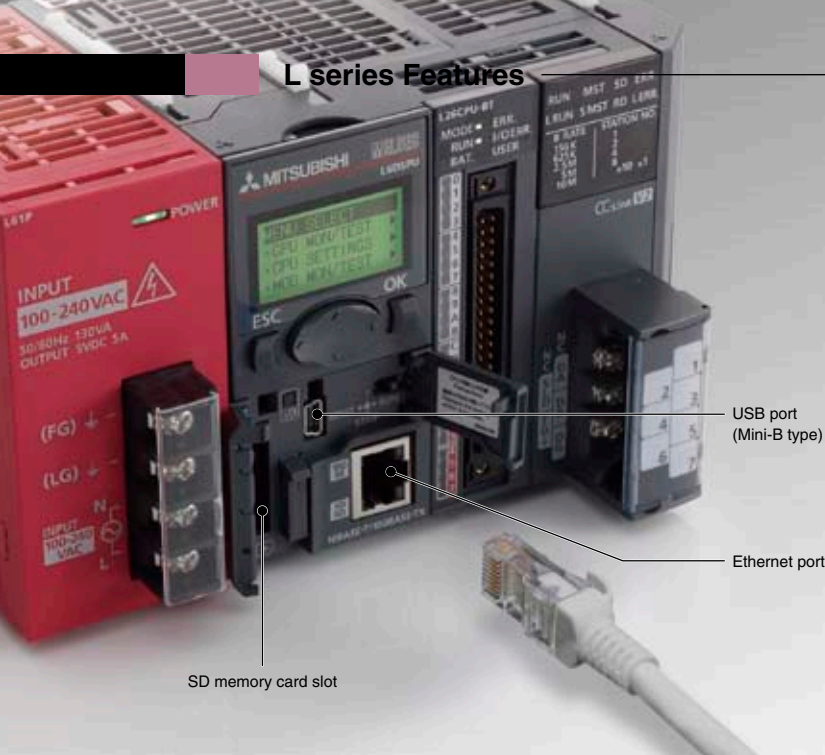

Convenient communication and storage options come as standard


Program, configure, and perform diagnostics on L series systems using either the USB 2.0 or Ethernet connections. The SD Memory Card slot has many uses including the easy backup and restore of programs and parameters.



L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT


USB and Ethernet connections standard

Use the USB 2.0 interface or Ethernet to connect directly at the installation site. The Ethernet interface supports direct connection with either a cross or straight LAN cable and does not require any configuration of the programmable controller or PC to operate.

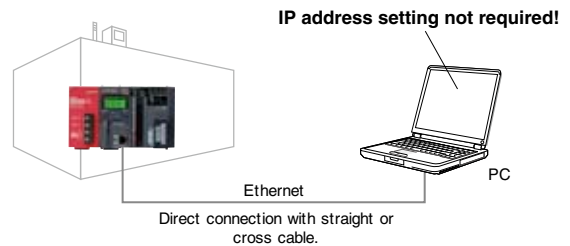

Easy connection through hub

All CPUs connected to the same hub can be searched and displayed in a list. By selecting the access target CPU from the list, it can be connected to even if the IP address is unknown.

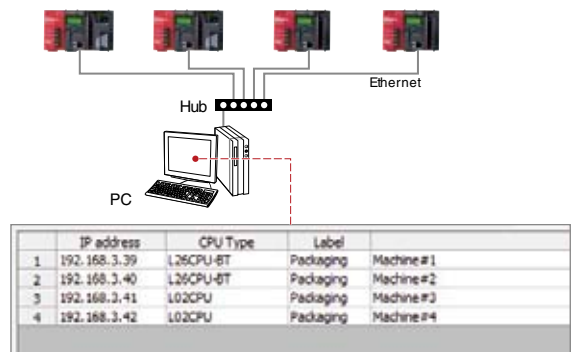


Use GX Works2 to retrieve a list of all CPUs connected to the network.

Easily connect to BACnet™ and MODBUS®/TCP Improved function

Ethernet realizes a high-speed connection, such as communication with external devices.


By using the predefined protocol support function, various devices that require open network protocol support, such as BACnet™ and MODBUS®/TCP are supported.

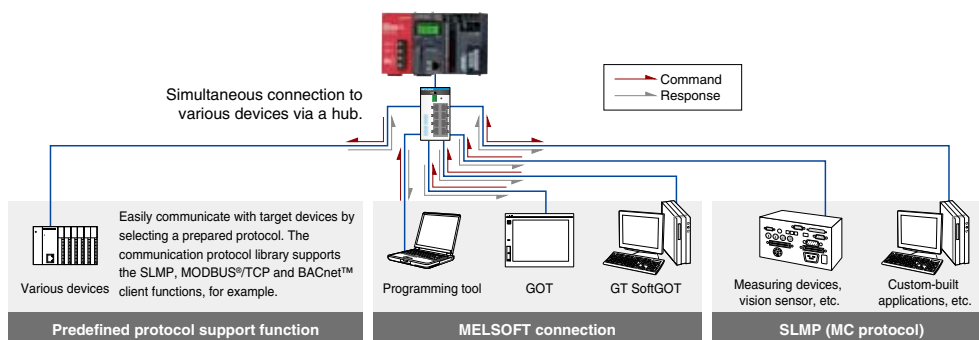

Network timestamp

Synchronize systems on an Ethernet network using an SNTP*1 server. Time synchronization can be achieved to enable simultaneous operations, quality control, or error tracking.

*1: SNTP: Simple Network Time Protocol

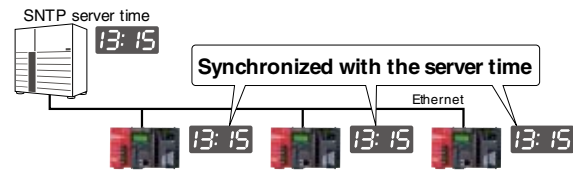

Program-less device data transfer

Simple PLC communication function*2

Using the programming tool, a simple parameter setting is all that is needed to transfer device data such as production information with no programming required.


This function makes it possible to easily establish communications not only with L series, but also Q series and QnA/A series controllers.

*2: CPU module whose first five serial number digits are "13042" or later is required.

■ Simple PLC Communication Setting



| Item | Description | |
|------------------------|--------------------|--|
| Communication Pattern | Read | Read the data of the specified destination device (transmission source) to the specified device of the host station (transmission destination). |
| | Write | Write the data of the specified device of the host station (transmission source) to the specified destination device (transmission destination). |
| | Transfer | Read the data of the specified destination device (transmission source) and write it to another specified destination device (transmission destination). |
| Communication Setting: | Execution Interval | Set between 10ms and 65535ms (1ms unit) |
| | Request Contact | Data send/receive is executed at the rising edge (OFF to ON) of the specified device (X, M, B). |
| | Setting No. | Set between 1 and 64. |
| Available devices | Device points | The maximum number that can be set for each setting No. is 512 words. (Maximum points of a word device: 256 points + Maximum points of a bit device: 4096 points) The total of setting No. 1 to 64 is maximum 4096 words. |

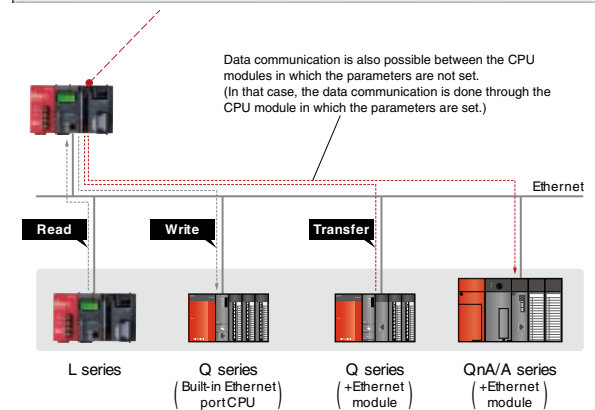

SD Memory Card special features

Use the SD/SDHC compatible memory card to quickly and easily back-up the CPU programs and parameters.

The backups can then be just as easily restored or used to program other CPUs. The memory card can also be used to hold data captured with the data logging function*3.

*3: For details about the data logging function, refer to page 11.

Save/load programs directly into the Programmable Controller

Multiple project save/load function*4

Parameters, program files, etc., can be saved/read onto a SD memory card by simply using the onboard display unit, without having to connect to a separate PC. Once saved on the SD memory card, files can be sent via e-mail, for example, when requiring off-site editing of the files.

*4: Supported by CPU module whose first five serial number digits are "14042" or later.






Gain more flexibility with an integrated system bus structure

Save space in control panels by utilizing the integrated system bus structure. Flexibility in system design is made possible by choosing only the required expansion modules for the application.

Expand L series systems with no base unit restrictions

L series modules do not require a base unit. The installation space is not restricted by base size, and the system can be installed with minimal required space. Furthermore, the addition of modules to the system is not restricted by the number of available base unit slots and costs may be reduced due to the elimination of expansion base units.

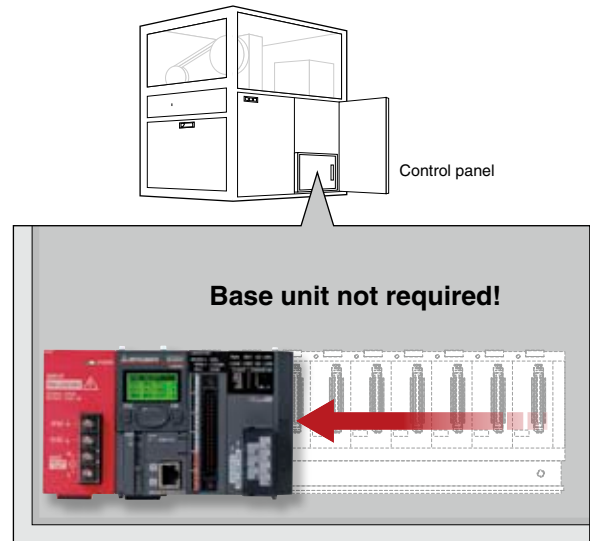


Installation space is reduced in the control panel

Identify important information easily

Every L series module has the serial number printed on the front surface of the module to allow viewing even during system operation (modules do not need to be removed).

*: Serial numbers can also be checked using GX Works2.

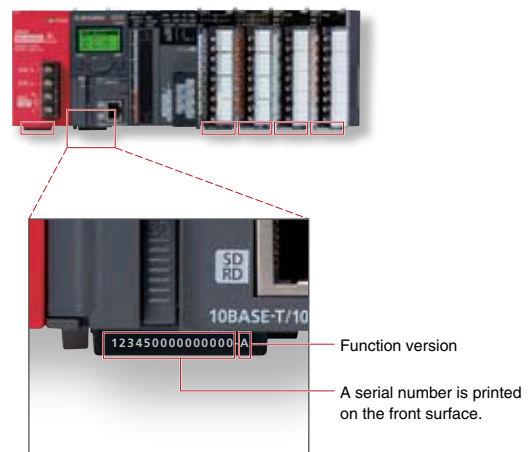

Function version

A serial number is printed on the front surface.

System expandable according to production equipment scale


Up to three extension blocks connectable to the main block using branch and extension modules. A maximum of 40 modules*1 caters a wide range of production equipment and line scale.

| CPU module*2 | Number of extension blocks | Number of connectable modules*3 |
|--|----------------------------|---|
| L02SCPU(-P) L02CPU(-P) | Up to 2 blocks | Main block: 10 modules Extension block: 11 modules |
| L06CPU(-P) L26CPU(-P) L26CPU(-P)BT | Up to 3 blocks | |

- *1: In the case of L06CPU(-P), L26CPU(-P), and L26CPU(-P)BT.
- *2: CPU modules whose first five serial number digits are 13072 or later.
- *3: Total number of I/O modules, intelligent function modules, network modules and branch modules.
This does not include the following: Power supply, CPU, display units, extension modules, RS-232 adapter, RS-422/485 adapter, and END covers.

When adding a branch module to a fully occupied block, relocate one of the other modules to a new block to give way to the branch module.

Example of largest system configuration of L26CPU-BT

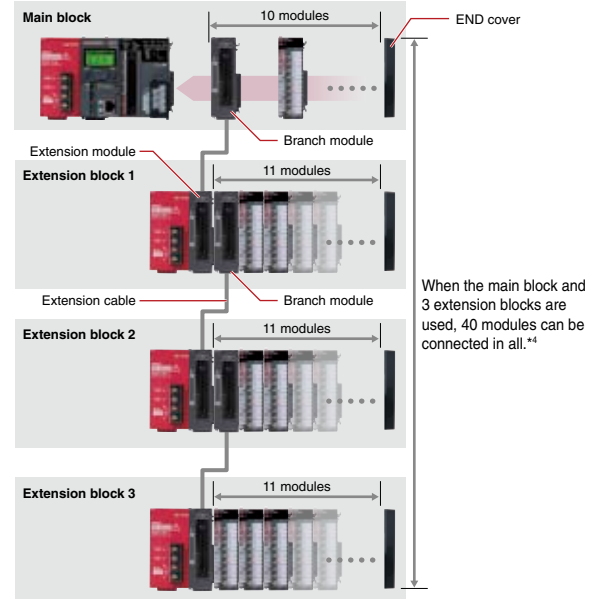

*4: Total number of I/O modules, intelligent function modules and network modules, excluding branch modules.


Well-organized control panel with minimum wiring

Branch module can be strategically placed in a block to minimize wiring space. Extension cables are available in 0.6-, 1.0- and 3.0-m. The maximum extension length is 3.0 m*5.


The extension cable is a one-touch type which can be easily connected and disconnected.

*5: The total length of extension cables should be within 3.0 m.



Example of vertical system configuration

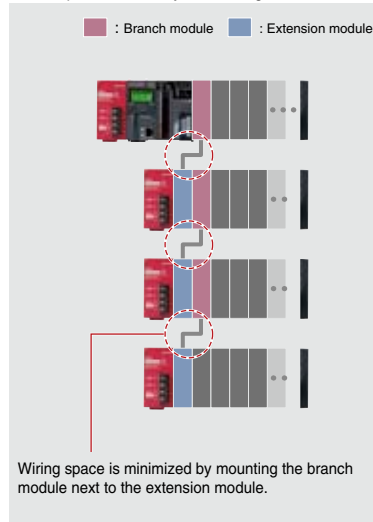

Example of horizontal system configuration

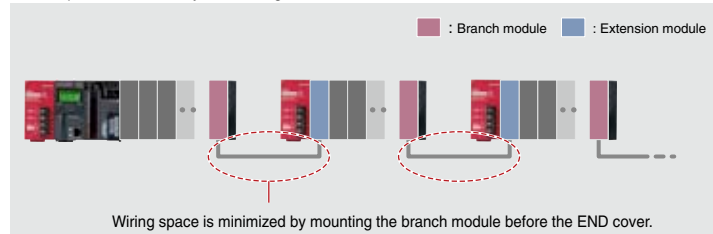

Example of vertical and horizontal mixed system

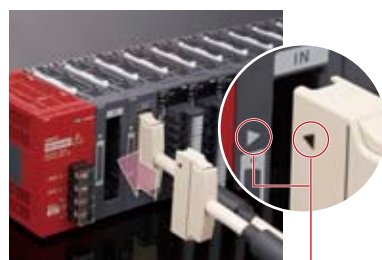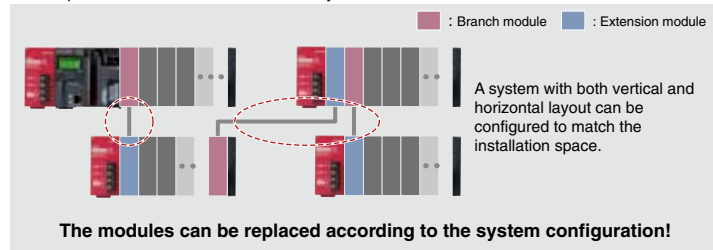

Matching marks on the slot and the cable



Mounting position when branch or extension module is used

| Modules | Mounted block | Possible mounting position |
|------------------|-----------------|-----------------------------------|
| | | Branch module |
| Extension module | Main block | Impossible |
| | Extension block | Right side of power supply module |

Data logging function*1


The data logging function embedded in the CPU module allows collected data to be saved in CSV format on a SD memory card simply by using the dedicated setting tool wizard. Various reference materials including daily reports, form creation and general reports can be created easily within the saved CSV file. This data can be used for a wide variety of applications requiring traceability, production data, etc.

*1: Not equipped in L02SCPU(-P).

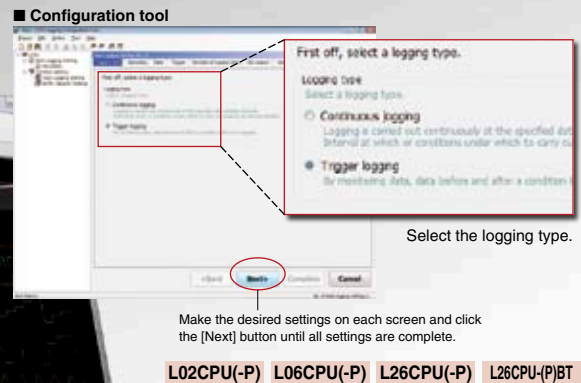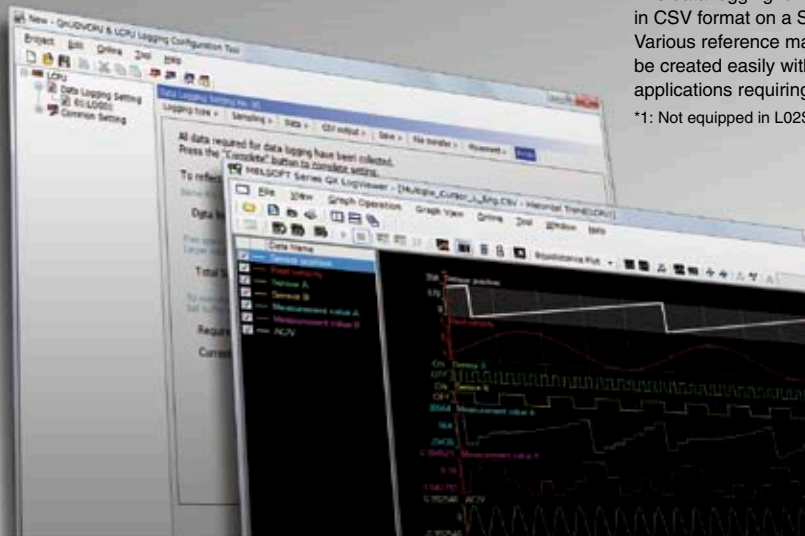


Easy logging without a program

Logging of device data just by configuring the parameters. The results can be saved in CSV format on a SD memory card.

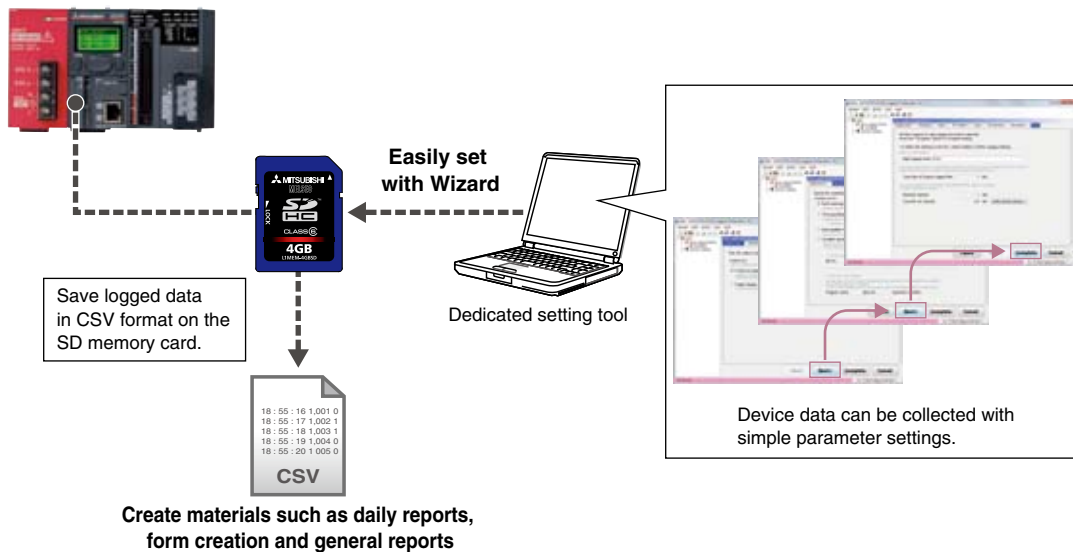


Logging of control data variances

Data is collected during each scan or within millisecond intervals allowing detection of control deviation even at very high speeds. Therefore, identification of errors can be conducted faster and in more detail.

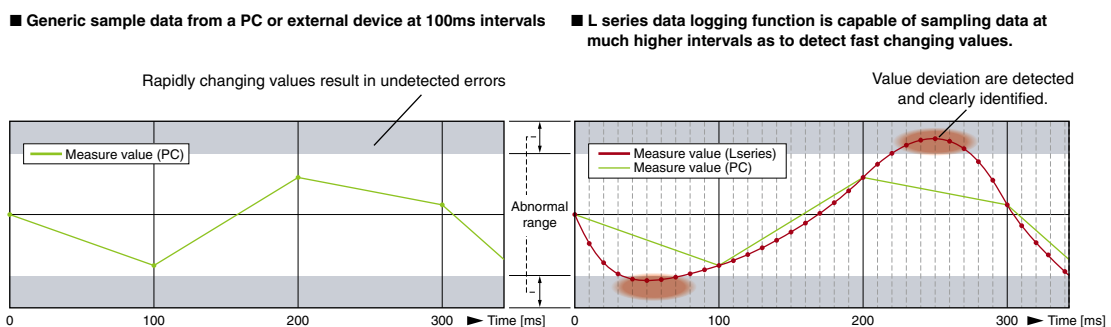

Auto logging function


Automatic data logging realized just by inserting the SD memory card into the CPU, which is achieved as the memory card includes the logging configuration file. Instructing data logging remotely is also realized just by sending the configuration file by e-mail and copying onto the SD memory card.

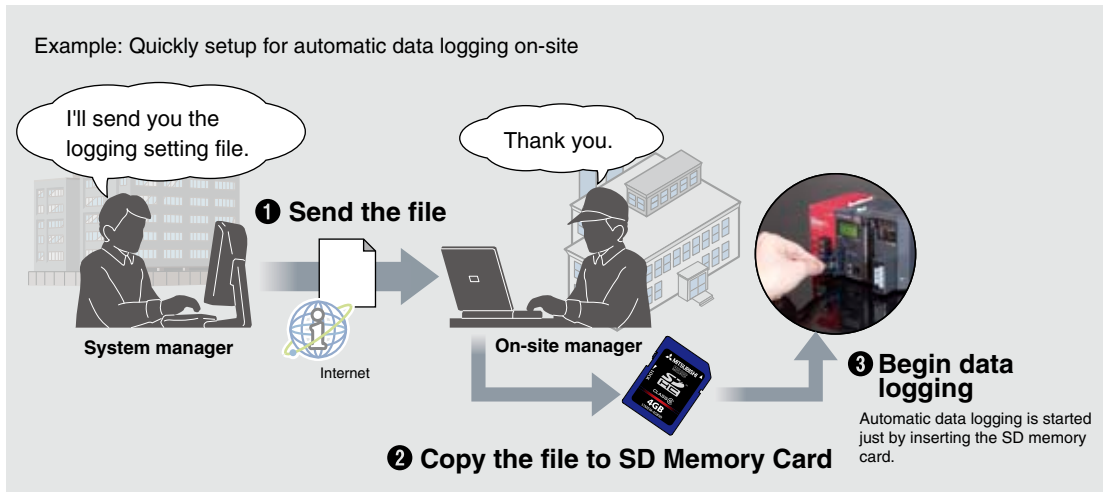

Automatically send logging files to FTP server

Data logging files saved on the SD memory card can be sent to the FTP server just by making a simple setting with the logging configuration tool. As the logging server can handle multiple files, management and maintenance tasks can be reduced.


■ File transfer feature*1

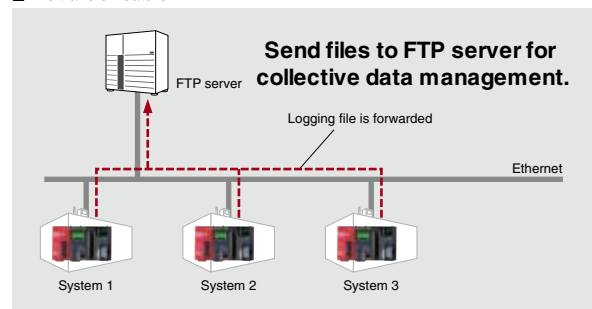

*1: Using a CPU module with the first 5 digits of the serial number "12112" or later.

Trigger logging function

Error causes and solutions can be quickly done as only the required data related to the problem is extracted, without having to spend time on filtering large volumes of diagnostic data.

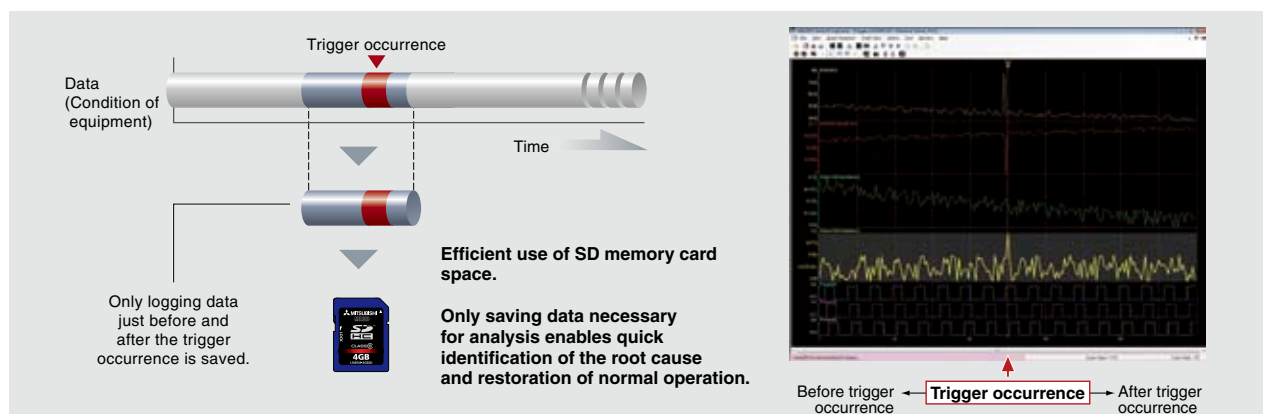


To receive a copy of GX LogViewer, contact your local Mitsubishi Electric representative.


L series Features



Device monitor



Built-in I/O monitor



Error message display
(Red backlight)

Feature rich and easy to use display


Check the system status and make setting changes directly from the display. Error status is clearly identified and troubleshooting and error investigation can be performed all without the need for any connections or engineering software.

*: Not available for L02SCPU(-P).

L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT


Instant error information check

Error history and detailed error information is available directly from the display unit.

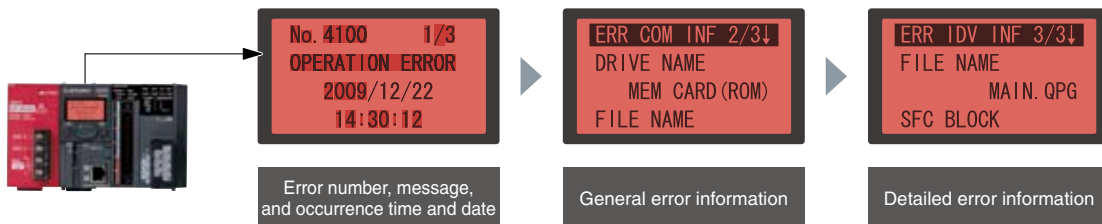


Intuitive menu navigation

The menu navigation guide shows the current menu tree location and an arrow to indicate the scroll direction at the top of the display.

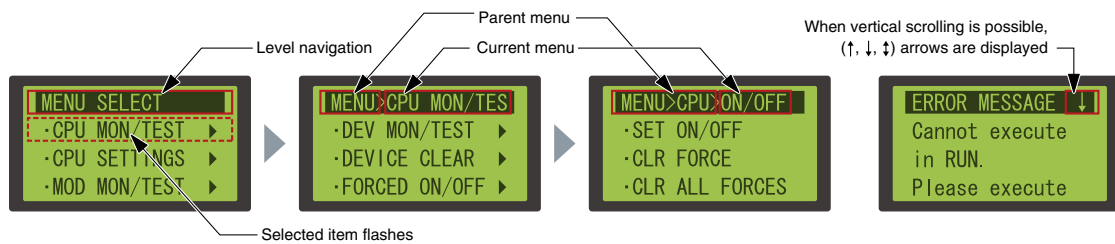

Multilingual operation

The display unit language can be selected (Japanese or English).

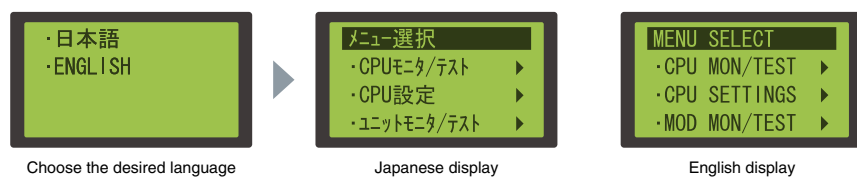



L series Features
CPU
I/O


The L series has been designed from the ground up to be easy to use

The L series module labeling design has been created to ensure clear legibility and identification of information at glance to avoid mistakes.


Universal design

Adopting a universal font

A high visibility font has been chosen for characters printed on system modules.




Regular Gothic font



The characters are thick enough, however the numbers "3, 6, 8, 9" and the alphabet "C" are not clearly distinguishable because the spacing indicated with a red circle is not large enough.


Font for L series




The space indicated with a red circle has been enlarged. The numbers "3, 6, 8, 9" and the alphabet "C" are clearly distinguishable. Characters are legible even in small print.

Module design

White and red are used to distinguish inputs from outputs respectively to allow for easy identification of terminal connection type.



White for input module



Red for output module

Easily identify module status

LEDs display the current status of modules including run and error states.



LEDs are located on the top front surface of the modules.

Analog/
Temperature Control

Simple Motion/
Positioning

High-Speed
Counter

Network

Software

Related Products

CPU Modules

Communication interface:
RS-232



L02SCPU

General-purpose output: Sink type
Program capacity: 20K steps
Basic operation processing speed: 60ns

*: End cover is enclosed.
Cannot be mounted on display unit (L6DSPU), RS-232 adapter, RS-422/485 adapter.

L02SCPU-P

General-purpose output: Source type
Program capacity: 20K steps
Basic operation processing speed: 60ns

Communication interface:
Ethernet



L02CPU

General-purpose output: Sink type
Program capacity: 20K steps
Basic operation processing speed: 40ns

*: END cover is included.

L02CPU-P

General-purpose output: Source type
Program capacity: 20K steps
Basic operation processing speed: 40ns



L06CPU

General-purpose output: Sink type
Program capacity: 60K steps
Basic operation processing speed: 9.5ns

*: END cover is included.

L06CPU-P

General-purpose output: Source type
Program capacity: 60K steps
Basic operation processing speed: 9.5ns



L26CPU

General-purpose output: Sink type
Program capacity: 260K steps
Basic operation processing speed: 9.5ns

*: END cover is included.

L26CPU-P

General-purpose output: Source type
Program capacity: 260K steps
Basic operation processing speed: 9.5ns

Communication interface:
Ethernet
(with CC-Link function)



L26CPU-BT

General-purpose output: Sink type
Program capacity: 260K steps
Basic operation processing speed: 9.5ns

*: END cover is included.

L26CPU-PBT

General-purpose output: Source type
Program capacity: 260K steps
Basic operation processing speed: 9.5ns

| Model | General-purpose output | Number of I/O points | Program capacity | Basic operation processing speed (LD instruction) | Peripheral connection ports | Built-in CC-Link |
|------------|------------------------|----------------------|------------------|---|-----------------------------|------------------|
| L02SCPU | Sink type | 1024 points | 20K steps | 60ns | USB/RS-232 | — |
| L02CPU | | | | 40ns | | — |
| L06CPU | | 4096 points | 60K steps | 9.5ns | USB/Ethernet | — |
| L26CPU | | | | | | — |
| L26CPU-BT | | | | | | CC-Link |
| L02SCPU-P | Source type | 1024 points | 20K steps | 60ns | USB/RS-232 | — |
| L02CPU-P | | | | 40ns | | — |
| L06CPU-P | | 4096 points | 60K steps | 9.5ns | USB/Ethernet | — |
| L26CPU-P | | | | | | — |
| L26CPU-PBT | | | | | | CC-Link |

CPU packages

■ L02CPU-SET

Includes CPU (L02CPU), power supply module (L61P), and display unit (L6DSPU).

■ L02CPU-P-SET

Includes CPU (L02CPU-P), power supply module (L61P), and display unit (L6DSPU).



■ L26CPU-SET

Includes CPU (L26CPU), power supply module (L61P), and display unit (L6DSPU).

■ L26CPU-P-SET

Includes CPU (L26CPU-P), power supply module (L61P), and display unit (L6DSPU).



■ L06CPU-SET

Includes CPU (L06CPU), power supply module (L61P), and display unit (L6DSPU).

■ L06CPU-P-SET

Includes CPU (L06CPU-P), power supply module (L61P), and display unit (L6DSPU).



■ L26CPU-BT-SET

Includes CPU (L26CPU-BT), power supply module (L61P), and display unit (L6DSPU).

■ L26CPU-PBT-SET

Includes CPU (L26CPU-PBT), power supply module (L61P), and display unit (L6DSPU).



■ General specifications

General specifications indicate the environmental specifications in which this product can be installed and operated. Unless otherwise specified, these general specifications apply to all L series products.
 *: General specifications of jointly developed products are different from those of MELSEC products. For more information, please refer to the product manuals or contact your local Mitsubishi Electric representative.

| Item | Specification | | | | | |
|-------------------------------|--|------------------------------|--------------|----------------------|----------------|--|
| Operating ambient temperature | 0 to 55°C | | | | | |
| Storage ambient temperature | -25 to 75°C | | | | | |
| Ambient humidity (operating) | 5 to 95%RH, non-condensing | | | | | |
| Ambient humidity (storage) | | | | | | |
| Vibration resistance | Compliant with JIS B 3502 and IEC 61131-2 | Under intermittent vibration | Frequency | Constant accelration | Half amplitude | Sweep count 10 times each in X, Y, and Z directions |
| | | | 5 to 8.4Hz | — | 3.5mm | |
| | | Under continuous vibration | 8.4 to 150Hz | 9.8m/s ² | — | — |
| | | | 5 to 8.4Hz | — | 1.75mm | — |
| 8.4 to 150Hz | 4.9m/s ² | — | — | — | | |
| Shock resistance | Compliant with JIS B 3502 and IEC 61131-2 (147m/s ² , 3 times each in X, Y, and Z directions) | | | | | |
| Operating atmosphere | No corrosive gases | | | | | |
| Operating altitude*1 | 0 to 2000m | | | | | |
| Installation location | Inside a control panel | | | | | |
| Overvoltage category*2 | II or less | | | | | |
| Pollution degree*3 | 2 or less | | | | | |
| Equipment class | Class I | | | | | |

*1: Do not use or store the programmable controller under pressure higher than the atmospheric pressure of altitude 0m.

Doing so may cause malfunction. When using the programmable controller under pressure, please consult your local Mitsubishi Electric representative.

*2: This indicates the section of the power supply to which the equipment is assumed to be connected between the public electrical power distribution network and the machinery within premises.

Category II applies to equipment for which electrical power is supplied from fixed facilities. The surge voltage withstand level for up to the rated voltage of 300V is 2500V.

*3: This index indicates the degree to which conductive material is generated in terms of the environment in which the equipment is used.

Pollution level 2 is when only non-conductive pollution occurs. A temporary conductivity caused by condensing must be expected occasionally.

■ CPU module specifications

| Item | | L02SCPU L02SCPU-P | L02CPU L02CPU-P | L06CPU L06CPU-P | L26CPU L26CPU-P | L26CPU-BT L26CPU-PBT |
|--|-----------------------------|---|---|--|--------------------------|---|
| Control method | | Stored program repeat operation | | | | |
| I/O control mode | | Refresh mode (Direct mode is available by specifying the direct access input/output (DX, DY).) | | | | |
| Programming language (sequence control language) | | Function block, relay symbol language, MELSP3 (SFC), MELSP-L, structured text (ST), logic symbolic language | | | | |
| Processing speed*4 (sequence instruction) | LD XO | 60ns | 40ns | 9.5ns | | |
| | MOV D0 D1 | 120ns | 80ns | 19ns | | |
| Constant scan | | 0.5 to 2000ms (Setting is available in increments of 0.5ms by parameter.) | | | | |
| Program size | | 20K steps (80K bytes) | | 60K steps (240K bytes) | 260K steps (1040K bytes) | |
| Memory capacity | Program memory (drive 0) | 80K bytes | | 240K bytes | 1040K bytes | |
| | Memory card (RAM) (drive 1) | — | | | | |
| | Memory card (ROM) (drive 2) | — | | | | |
| | Standard RAM (drive 3) | 128K bytes | | 768K bytes | | |
| | Standard ROM (drive 4) | 512K bytes | | 1024K bytes | 2048K bytes | |
| Maximum number of files stored | Program memory | | 64 files | 124 files | 252 files | |
| | Memory card (RAM) | | — | | | |
| | Memory card (ROM) | SD | — | Root directory: 511 files (maximum) Subdirectory: 65533 files (maximum) | | |
| | | SDHC | — | Root directory: 65534 files (maximum) Subdirectory: 65533 files (maximum) | | |
| | Standard RAM | | 4 files (each one of the following files: file register file, local device file, sampling trace file, and module error collection file) | | | |
| | Standard ROM | | 128 files | | 256 files | |
| Maximum number of intelligent function module parameters | Initial setting | 2048 parameters | | 4096 parameters | | |
| | Refresh | 1024 parameters | | 2048 parameters | | |
| Maximum number of modules specification*6 | | 30 | | | 40 | |
| Built-in I/O function | | Refer to the built-in I/O specifications ➡ P.18 to P.19 | | | | |
| Data Logging function | | Refer to the Data Logging function specifications ➡ P.19 | | | | |
| Built-in Ethernet function | | Refer to the built-in Ethernet specifications ➡ P.20 | | | | |
| Built-in Serial Communication function | | Refer to the Built-in Serial Communication specifications ➡ P.20 | | — | | |
| Built-in CC-Link function | | — | | | | Refer to the CC-Link Master/Local Module specifications. ➡ P.51 |
| Clock function | Displayed information | Year, month, date, hour, minute, second, and day of the week (automatic leap year detection) | | | | |
| | Accuracy | 0°C: -2.96 to +3.74s (TYP. +1.42s) per day 25°C: -3.18 to +3.74s (TYP. +1.50s) per day 55°C: -13.20 to +2.12s (TYP. -3.54s) per day | | | | |
| 5V DC internal current consumption | CPU | With display unit | — | 1.00A | 1.06A | 1.43A |
| | | Without display unit | 0.75A | 0.94A | 1.00A | 1.37A |
| | END cover (Accessory)*7 | 0.04A | | | | |
| Weight | CPU | With display unit | — | 0.40kg | | 0.50kg |
| | | Without display unit | 0.32kg | 0.37kg | | 0.47kg |
| | END cover (Accessory)*7 | 0.06kg | | | | |

*4: Indexing devices does not delay processing time.

*5: The operation of devices that are not manufactured or recommended as compatible products by Mitsubishi Electric cannot be guaranteed.

*6: The total number of modules that can be mounted to a CPU. Refer to the "Maximum number of modules specification" for each module.

(Power supply modules, CPU module, Display unit, Extension module, RS-232 adapter, RS-422/485 adapter, END cover, and END cover with error terminal are not included. Note that only one CPU or head module per system is possible.)

*7: The END cover is included with the CPU module and must be placed on the right end of the last module in the system.

■ CPU module device specifications

| Item | L02SCPU L02SCPU-P | L02CPU L02CPU-P | L06CPU L06CPU-P | L26CPU L26CPU-P | L26CPU-BT L26CPU-PBT |
|--|--|---|--|---|-------------------------|
| Number of I/O device points (number of points available on a program) | 8192 points (X/Y0 to X/Y1FFF) | | | | |
| Number of I/O points | 1024 points (X/Y0 to X/Y3FF) | | 4096 points (X/Y0 to X/YFFF) | | |
| Internal relay (M) | 8192 points (M0 to M8191) by default (changeable) | | | | |
| Latch relay (L) | 8192 points (L0 to L8191) by default (changeable) | | | | |
| Link relay (B) | 8192 points (B0 to B1FFF) by default (changeable) | | | | |
| Timer (T) | 2048 points (T0 to T2047) by default (changeable) (Low-speed and high-speed timers available) (Low-speed timer: 1 to 1000ms (in increments of 1ms), default: 100ms) (High-speed timer: 0.1 to 100ms (in increments of 0.1ms), default: 10ms) | | | | |
| Retentive timer (ST) | 0 points by default (changeable)(Low-speed and high-speed retentive timers available) (Low-speed retentive timer: 1 to 1000ms (in increments of 1ms), default: 100ms) (High-speed retentive timer: 0.1 to 100ms (in increments of 0.1ms), default: 10ms) | | | | |
| Counter (C) | Normal counter 1024 points (C0 to C1023) by default (changeable) | | | | |
| Data register (D) | 12288 points (D0 to D12287) by default (changeable) | | | | |
| Extended data register (D) | 32768 points (D12288 to D45055) by default (changeable) | | 131072 points (D12288 to D143359) by default (changeable) | | |
| Link register (W) | 8192 points (W0 to W1FFF) by default (changeable) | | | | |
| Extended link register (W) | 0 points by default (changeable) | | | | |
| Annunciator (F) | 2048 points (F0 to F2047) by default (changeable) | | | | |
| Edge relay (V) | 2048 points (V0 to V2047) by default (changeable) | | | | |
| Link special relay (SB) | 2048 points (SB0 to SB7FF) by default (changeable) | | | | |
| Link special register (SW) | 2048 points (SW0 to SW7FF) by default (changeable) | | | | |
| File register | (R) | 32768 points (R0 to R32767) (Maximum 65536 points are available by switching blocks.) | | 32768 points (R0 to R32767) (Maximum 393216 points are available by switching blocks.) | |
| | (ZR) | 65536 points (ZR0 to ZR65535) (Blocks do not need to be switched.) | | 393216 points (ZR0 to ZR393215) (Blocks do not need to be switched.) | |
| Step relay (S) | 8192 points (S0 to S8191) by default | | | | |
| Index register/standard device register (Z) | 20 points (Z0 to Z19) (maximum) | | | | |
| Index register (Z) (32-bit index modification of ZR device) | 10 points (Z0 to Z18) (maximum) (The index register is used as a double-word device.) | | | | |
| Pointer (P) | 4096 points (P0 to P4095) (The local pointer range and the common pointer range can be set by parameter.) | | | | |
| Interrupt pointer (I) | 256 points (I0 to I255) (The fixed scan interval for the system interrupt pointer I28 to I31 can be set by parameter.) 0.5 to 1000ms (in increments of 0.5ms) Default I28: 100ms, I29: 40ms, I30: 20ms, I31: 10ms | | | | |
| Special relay (SM) | 2048 points (SM0 to SM2047) (The number of device points is fixed.) | | | | |
| Special register (SD) | 2048 points (SD0 to SD2047) (The number of device points is fixed.) | | | | |
| Function input (FX) | 16 points (FX0 to FX F) (The number of device points is fixed.) | | | | |
| Function output (FY) | 16 points (FY0 to FY F) (The number of device points is fixed.) | | | | |
| Function register (FD) | 5 points (FD0 to FD4) (The number of device points is fixed.) | | | | |
| Intelligent function module device | Device that directly accesses the buffer memory of an intelligent function module Specification format: U□□/G□□ | | | | |
| Latch (data retention during power failure) range | 8192 points (L0 to L8191) by default (The latch range can be set for the devices, B, F, V, T, ST, C, D, W, and R by parameter.) | | | | |

■ CPU built-in I/O function - input specifications (general-purpose input/interrupt input/pulse catch function)

| Item | | Description | |
|------------------|---------------------------------|--|--|
| Standard input | Points | 10 | |
| | Input voltage/current | 24V DC 4.1mA (TYP.) | |
| | The minimum input response time | 100µs | |
| | Input response time setting | 0.1ms, 1ms, 5ms, 10ms, 20ms, 70ms | |
| | Common terminal arrangement | 10 points/common (Positive or negative common) | |
| High-speed input | Points | 6 | |
| | Input voltage/current | DC input | 24V DC 6.0mA (TYP.) |
| | | Differential input | EIA Standard RS-422-A Differential line driver level AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
| | The minimum input response time | 10µs | |
| | Input response time setting | 0.01ms/0.1ms/0.2ms/0.4ms/0.6ms/1ms | |
| | Common terminal arrangement | Independent | |

■ CPU built-in I/O function - output specifications (general-purpose output function)

| Item | | Description |
|-----------------------------|-----------|---|
| Points | | 8 |
| Output voltage/current | | 5 to 24V DC 0.1A |
| Response time | OFF to ON | 1µs or less (rated load, resistance load) |
| | ON to OFF | |
| Common terminal arrangement | | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: 8 points/common (Sink type) L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: 8 points/common (Source type) |

■ CPU built-in I/O function - positioning function specifications

| Item | | Description | |
|--|---|---|---|
| Number of controlled axes | | 2 | |
| Control unit | | pulse | |
| Operation pattern | PTP*1 control | Available | |
| | Path control | Not usable | |
| Number of positioning data | | 10 data/axis | |
| Positioning control | Positioning control method | PTP*1 control | ABS/INC |
| | | Speed/position switching control | INC |
| | Positioning range | PTP*1 control | -2147483648 to 2147483647 pulses |
| | | Speed/position switching control | 0 to 2147483647 pulses |
| | Speed command | | 0 to 200K pulses/s |
| Acceleration/deceleration system selection | | Automatic trapezoid acceleration/deceleration and S-curve acceleration/deceleration | |
| OPR method | | 6 types | |
| Starting time (1-axis linear control) | | Trapezoid acceleration/deceleration (single-axis start): 30 µs/axis S-curve acceleration/deceleration (single-axis start): 35 µs/axis | |
| Command pulse output | Pulse output method | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: 5 to 24V DC (Sink type) L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: 5 to 24V DC (Source type) | |
| | Pulse output mode | 4 types | |
| | Maximum output pulse | 200K pulses/s | |
| | Maximum connection distance with drive unit | 2 m | |
| External input | Zero signal | DC input | 24V DC 6.0 mA (TYP.) |
| | | Differential input | EIA RS-422-A differential line driver level AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
| | Speed/position switching signal | | 24V DC 4.1 mA (TYP.) |
| | Near-point dog signal | | |
| | Upper and lower limit signal | | |
| | Drive unit ready signal | | |
| Input response time | | Zero signal: 10 µs Speed/position switching control, near-point dog signal: 100 µs Upper and lower limit signal, drive unit ready signal: 2 ms | |
| External output | Deviation counter clear signal | | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: 5 to 24V DC 0.1A (Sink type) L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: 5 to 24V DC 0.1A (Source type) |
| | Response time | OFF to ON ON to OFF | 1 µs or less (rated load, resistive load) |

*1: Abbreviation for "Point to Point." This is a type of position control.

■ CPU built-in I/O function - high-speed counter specifications

| Item | | Description |
|-------------------------|--|---|
| Number of channels | | 2 |
| Count input signal | Phase | 1-phase input (1 multiple/2 multiples) CW/CCW, 2-phase input (1 multiple/2 multiples/4 multiples) |
| | Signal level | 24V DC 6.0mA (TYP.) EIA Standard RS-422-A Differential line driver level AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
| Counter | DC input | 24V DC 6.0mA (TYP.) |
| | Differential input | EIA Standard RS-422-A Differential line driver level AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
| | Maximum counting speed | 200K pulses/s (for 2 multiples of 1 phase and 4 multiples of 2 phases) |
| | Counting range | -2147483648 to 2147483647 |
| External input | Model | UP/DOWN preset counter (with ring counter function) |
| | Minimum count pulse width (Duty ratio 50%) | 1 phase: 5µs 2 phases: 10µs |
| | Min. phase differential for 2-phase input | 5µs |
| | Phase Z (preset) | DC input: 24V DC 6.0mA (TYP.) Differential input: EIA Standard RS-422-A Differential line driver level AM26L31 (manufactured by Texas Instruments Incorporated) or equivalent |
| External output | Function start | 24V DC 4.1mA (TYP.) |
| | Latch | Phase Z: 10µs Function start, latch: 100µs |
| | Input response time | Phase Z: 10µs Function start, latch: 100µs |
| | Output format | L02SCPU, L02CPU, L06CPU, L26CPU, L26CPU-BT: Sink type L02SCPU-P, L02CPU-P, L06CPU-P, L26CPU-P, L26CPU-PBT: Source type |
| Coincidence output | Output voltage/current | Coincidence output No. 1 / PWM output: 5 to 24 V DC/0.25 A*1 Coincidence output No. 2: 5 to 24 V DC/0.1 A |
| | Response time | OFF to ON: 1µs or less (Rated load, resistance load) ON to OFF: 1µs or less (Rated load, resistance load) |
| | Comparison range | -2147483648 to 2147483647 |
| PWM output | Comparison result | Set value < Counted value Set value = Counted value Set value > Counted value |
| | I/O points | 2 points/channel |
| Pulse width measurement | Output frequency range | DC to 200kHz |
| | ON width | 1µs |
| | Duty ratio | On width can be set in increments of 0.1µs. |
| Pulse width measurement | I/O points | 1 point/channel |
| | Measurement item | Pulse width (On width: 200µs or more, Off width: 200µs or more) |
| | Measurement resolution | 5µs |
| Pulse width measurement | Measurement points | 1 point/channel |

*1: For units where the first six digits of the serial number are "120722" or later. The specification for previous serial numbers is 5 to 24 V DC/0.1 A.

■ CPU Data logging function specifications

| Item | | L02CPU L02CPU-P | L06CPU L06CPU-P | L26CPU L26CPU-P | L26CPU-BT L26CPU-PBT |
|---------------------------------|-----------------------------------|---|--------------------|--------------------|-------------------------|
| Number of data logging settings | | 10 | | | |
| Data logging buffer capacity | | For each setting, any of 32 to 4832K bytes (in units of 1K byte) can be specified. The total value of settings No.1 to No.10 is up to 5120K bytes. | | | |
| Data storage location | | Standard ROM (configuration files only), SD Memory Card | | | |
| Logging type | | <ul style="list-style-type: none"> Continuous logging Trigger logging | | | |
| Data sampling | Sampling interval | <ul style="list-style-type: none"> Each scanning cycle Time specification | | | |
| | No. of data sampling points | <ul style="list-style-type: none"> Condition specification (Device specification, Step No. specification) | | | |
| | AND conjunction | Up to 1280 (128 points per setting) | | | |
| Data processing | Trigger condition | <ul style="list-style-type: none"> In the Sampling interval setting, Device and Step No. under "Condition specification" can be specified in combination (AND conjunction). Condition specification (Device change specification, Step No. specification) When trigger instruction executed When data logging trigger activated | | | |
| | AND conjunction | In the Trigger setting, Device data change and Step No. under "Condition specification" can be specified in combination (AND conjunction). | | | |
| | Trigger logging range | Data of the specified number of records are logged before and after a trigger. | | | |
| | Number of trigger logging records | 1 | | | |
| File output | File Name | Up to 48 one-byte characters can be used for the following. • File number (serial number)*2 • Character string (name)*3 • Date and time*3 | | | |
| | File format | CSV file | | | |
| | Data type | <ul style="list-style-type: none"> Bit Word (unsigned) Word (signed) Double word (unsigned) Double word (signed) FLOAT [single precision] FLOAT [double precision] Character string: 1 to 256 characters Numeric string: 1 to 256 bytes | | | |
| | Data output format (CSV file) | <ul style="list-style-type: none"> Decimal format Hexadecimal format Exponential format | | | |
| Handling of output files | File switching timing | • No. of records • File size | | | |
| | Number of saved files | 1 to 65535 | | | |

*2: Part of the saved file name, this number is automatically assigned.

*3: Optional data to be appended to the saved file name.

■ CPU built-in Ethernet function specifications

| Item | | L02CPU L02CPU-P | L06CPU L06CPU-P | L26CPU L26CPU-P | L26CPU-BT L26CPU-PBT |
|-----------------------------|---------------------------------------|--|--------------------------------|--------------------|-------------------------|
| Transmission specifications | Data transfer speed | 100 or 10 Mbps | | | |
| | Communication mode | Full-duplex or half-duplex | | | |
| | Transmission method | Base band | | | |
| | Maximum distance between hub and node | 100 m | | | |
| | Maximum number of nodes/connection | 10BASE-T | Cascade connection: Up to four | | |
| | 100BASE-TX | Cascade connection: Up to two | | | |
| Number of connections | TCP/IP | Total of 16 for socket communications, MELSOFT connections, and MC protocol.*1 | | | |
| | UDP/IP | One for FTP | | | |
| Connection cable*2 | 10BASE-T | Ethernet cable of category 3 or higher (STP/UTP cable)*3 | | | |
| | 100BASE-TX | Ethernet cable of category 5 or higher (STP cable) | | | |

*1: Only the QnA-compatible 3E frame may be used.

*2: Straight through cable. Also, when the CPU is connected directly with a GOT, a cross cable (category 5e or less) may be used.

*3: The use of STP (Shielded Twisted Pair) cables is recommended in noisy environments.

■ Communication Performance Comparison (Comparison of LCPU with built-in Ethernet port and Ethernet interface module)

| Function/performance | LCPU with built-in Ethernet port | Ethernet Interface Module |
|---|----------------------------------|-----------------------------------|
| Communication speed | 100 Mbps | 100 Mbps |
| MC protocol communication | ●*4 | ● |
| Socket communication | ●*5 | ● (Fixed buffer communication) |
| Communications using a random access buffer | — | ● |
| E-mail function | — | ● |
| Communications using data link instructions | — | ● |
| File transfer (FTP server) function | ●*6 | ● |
| Web function | — | ● |
| MELSOFT products and GOT connection | ● | ● |

*4: QnA compatible 3E frame device memory access commands only. Refer to the relevant manual for details.

*5: There are some differences regarding the fixed buffer communications function. Refer to the relevant manual for details.

*6: The "quote cpuchg" command is not supported.

■ CPU built-in serial communication function specifications

| Item | L02SCPU L02SCPU-P |
|--|--|
| Communication mode | Full duplex |
| Synchronization method | Start-stop synchronization method |
| Transmission speed | 9.6kbps, 19.2kbps, 38.4kbps, 57.6kbps, 115.2kbps |
| Data format | <ul style="list-style-type: none"> Start bits: 1 Data bits: 8 Parity bits: Odd number Stop bits: 1 |
| MC protocol format *7 (automatic judgment) | <ul style="list-style-type: none"> Formats 4 (ASCII) Formats 5 (Binary) |
| Frame *7 | <ul style="list-style-type: none"> QnA compatible 3C frame QnA compatible 4C frame |
| Transmission control | DTR/DSR control |
| Transmission distance (Overall distance) | Maximum 15m |

*7: Information relevant to the MC protocol format and frame are shown below.

●: Supported —: Not supported

| Function | | Formats 4 | Formats 5 |
|--------------------------------|-------------------------|-----------|-----------|
| Communication with ASCII code | QnA compatible 3C frame | ● | — |
| | QnA compatible 4C frame | ● | — |
| Communication with binary code | QnA compatible 4C frame | ● | ● |

■ How to read the product code

L 26 □ CPU - P BT - SET

① ② ③ ④ ⑤ ⑥

| Number | Item | Code | Specification |
|--------|----------------------------|-------|---|
| ① | Program memory capacity | 02 | 20K steps |
| | | 06 | 60K steps |
| | | 26 | 260K steps |
| | | | |
| ② | Communication interface | Blank | Built-in Ethernet model |
| | | S | Built-in RS-232 model |
| ③ | Type of module | CPU | CPU module |
| ④ | Built-in I/O output format | Blank | Sink type |
| | | P | Source type |
| ⑤ | Built-in CC-Link function | Blank | — |
| | | BT | ● |
| ⑥ | Product set | Blank | — |
| | | SET | Set includes a power supply module (L61P) and display unit (L6DSPU) |

Branch/Extension Module



Specifications for branch and extension modules

| Item | L6EXB [Branch module] | L6EXE [Extension module] |
|------------------------------------|-------------------------|----------------------------|
| 5V DC internal current consumption | 0.08A | 0.08A |
| Weight | 0.12kg | 0.13kg |

Specifications for extension cables

| Item | LC06E | LC10E | LC30E |
|--------------|--------|--------|--------|
| Cable length | 0.6m | 1.0m | 3.0m |
| Weight | 0.19kg | 0.23kg | 0.45kg |

Power Supply Modules



Power supply module specifications

| Item | L61P | L63P | L63SP NEW |
|--|---|---|--|
| Input power supply | 100 to 240V AC (-15% to +10%) | 24V DC (-35% to +30%) | |
| Input frequency | 50/60Hz (-5% to +5%) | — | |
| Input voltage distortion | Within 5% | — | |
| Maximum input apparent power | 130VA | — | |
| Maximum input power | — | 45W | |
| Inrush current | 20A, within 8ms | 100A, within 1ms (24V DC input) | |
| Rated output current (5V DC) | 5A | | |
| Overcurrent protection (5V DC) | 5.5A or more | | |
| Overvoltage protection | 5.5 to 6.5V | | |
| Efficiency | 70% or more | | |
| Allowable momentary power failure time | Within 10ms | Within 10ms (24V DC input) | |
| Withstand voltage | 2300V AC per minute (altitude 0 to 2000m) Between the combined "line input/LG terminals" and the "FG terminal and output". | 510V AC per minute (altitude 0 to 2000m) Between the combined "line input/LG terminals" and the "FG terminal and output". | —*1 |
| Insulation resistance | 10MΩ or higher by 500V DC insulation resistance tester • Between the combined "line input/LG terminals" and the "FG terminal and output". • The line input and LG terminals. • The FG terminal and output. | | —*1 |
| Weight | 0.32kg | 0.29kg | 0.19kg |

*1: There is no isolation between the primary side 24V DC and secondary side 5V DC.

RS-232 Adapter

 RS-232
Adapter


L6ADP-R2

 Transmission speed: 115.2kbps
GOT connection
MELSOFTTM connection

 Predefined protocol support function
Serial Communication function

*1: Refer to each MELSOFT product manual for details on the supported software.

■ RS-232 adapter specifications

| Item | Specification |
|------------------------------------|---------------|
| Maximum data transmission speed | 115.2kbps |
| 5V DC internal current consumption | 0.02A |
| Weight | 0.10kg |

RS-422/485 Adapter

 RS-422/485
Adapter


L6ADP-R4 NEW

 Transmission speed: 115.2kbps
GOT connection

 Predefined protocol support function
Serial Communication function

■ RS-422/485 adapter specifications

| Item | Specification |
|------------------------------------|---------------|
| Maximum data transmission speed | 115.2kbps |
| 5V DC internal current consumption | 0.15A |
| Weight | 0.12kg |

END Cover with Error Terminal

 END Cover with
Error Terminal


L6EC-ET

Error output Relay

■ END cover with error terminal specifications

| Item | | Specification | |
|------------------------------------|---|---------------|---|
| ERR. terminal | Rated switching voltage, current | 24V DC 0.5A | |
| | Minimum switching load | 5V DC, 1mA | |
| | Response time | OFF to ON | 10ms or less |
| | | ON to OFF | 12ms or less |
| | Life | Mechanical | 20 million times or more |
| | | Electrical | Rated switching voltage/current: 10 million times or more |
| | Surge suppressor | — | |
| Fuse | — | | |
| Applicable wire size | 0.3 to 2.0mm ² (AWG22 to 14) (Twisted wire/Solid wire) | | |
| External connections | Spring clamp terminal block | | |
| 5V DC internal current consumption | 0.06A | | |
| Weight | 0.11kg | | |

Display Unit

Display Unit








L6DSPU









■ Display Unit specifications

| Item | Specification |
|--------------------------------|---|
| Number of displayed characters | 16 one-byte characters × 4 lines |
| Displayed characters | <ul style="list-style-type: none"> • Alphanumeric (two-byte/one-byte character) • Japanese character Katakana (two-byte/one-byte character) • Japanese character Hiragana (two-byte character) • Chinese character (two-byte character) • Symbol (two-byte/one-byte character) |
| Language | Japanese/English |
| Backlight | Green (normal), red (error) |
| Weight | 0.03kg |

Input Modules

| | | | |
|----------|--|---|--|
| AC input |  LX10 Number of inputs: 16 points 100 to 120V AC 18-point terminal block |  LX28 Number of inputs: 8 points 100 to 240V AC 18-point terminal block | |
| DC input |  LX40C6 Number of inputs: 16 points 24V DC 18-point terminal block |  LX41C4 Number of inputs: 32 points 24V DC 40-pin connector |  LX42C4 Number of inputs: 64 points 24V DC 40-pin connector x2 |

Output Modules

| | | | |
|---------------------------------|---|--|---|
| Contact output |  LY10R2 Number of outputs: 16 points 24V DC/240V AC Rated switching current: 2A/point 18-point terminal block | | |
| Triac output |  LY20S6 Number of outputs: 16 points 100 to 240V AC Max. load current: 0.6A/point 18-point terminal block | | |
| Transistor output (Sink type) |  LY40NT5P Number of outputs: 16 points 12 to 24V DC Max. load current: 0.5A/point Protection Function 18-point terminal block |  LY41NT1P Number of outputs: 32 points 12 to 24V DC Max. load current: 0.1A/point Protection Function 40-pin connector |  LY42NT1P Number of outputs: 64 points 12 to 24V DC Max. load current: 0.1A/point Protection Function 40-pin connector x2 |
| Transistor output (Source type) |  LY40PT5P Number of outputs: 16 points 12 to 24V DC Max. load current: 0.5A/point Protection Function 18-point terminal block |  LY41PT1P Number of outputs: 32 points 12 to 24V DC Max. load current: 0.1A/point Protection Function 40-pin connector |  LY42PT1P Number of outputs: 64 points 12 to 24V DC Max. load current: 0.1A/point Protection Function 40-pin connector x2 |

I/O Combined Module

| | | | |
|--|--|---|---|
| DC input / Transistor output (Sink type) |  LH42C4NT1P | Input specifications Number of inputs: 32 points 24V DC 40-pin connector | Output specifications Number of outputs: 32 points 12 to 24V DC Max. load current: 0.1A/point Protection Function 40-pin connector |
| DC input / Transistor output (Source type) |  LH42C4PT1P | Input specifications Number of inputs: 32 points 24V DC 40-pin connector | Output specifications Number of outputs: 32 points 12 to 24V DC Max. load current: 0.1A/point Protection Function 40-pin connector |

Input module specifications

AC input module

| Item | LX10 | LX28 |
|---|---|---|
| Number of input points | 16 points | 8 points |
| Rated input voltage, frequency | 100 to 120V AC (+10%/-15%), 50/60Hz (±3Hz) | 100 to 240V AC (+10%/-15%), 50/60Hz(±3Hz) |
| Input voltage distortion | Within 5% | |
| Rated input current | 8.2mA (100V AC, 60Hz), 6.8mA (100V AC, 50Hz) | 16.4mA (200V AC, 60Hz), 13.7mA (200V AC, 50Hz), 8.2mA (100V AC, 60Hz), 6.8mA (100V AC, 50Hz) |
| Inrush current | Max. 200mA within 1ms | Max. 950mA within 1ms |
| ON voltage/ON current | 80V AC or higher/5mA or higher (50Hz, 60Hz) | |
| OFF voltage/OFF current | 30V AC or lower/1.7mA or lower (50Hz, 60Hz) | |
| Input resistance | 12.2kΩ (60Hz), 14.6kΩ (50Hz) | |
| Response time | OFF to ON | 15ms or less (100V AC 50Hz, 60Hz) 10ms or less (200V AC 50Hz, 60Hz) |
| | ON to OFF | 20ms or less (100V AC 50Hz, 60Hz) 20ms or less (100/200V AC 50Hz, 60Hz) |
| Common terminal arrangement | 16 points/common | 8 points/common |
| Maximum number of modules specification | Counts as 1 module | |
| Number of occupied I/O points | 16 points (I/O assignment: input 16 points) | |
| External connections | 18-point terminal block | |
| 5V DC internal current consumption | 90mA (TYP. all points ON) | 80mA (TYP. all points ON) |
| Weight | 0.17kg | 0.15kg |

DC input module

| Item | LX40C6 | LX41C4 | LX42C4 |
|---|---|--|---|
| Number of input points | 16 points | 32 points | 64 points |
| Rated input voltage | 24V DC (ripple rate: 5% or less) (allowable voltage range: 20.4 to 28.8VDC) | | |
| Rated input current | 6.0mA TYP. (at 24V DC) | 4.0mA TYP. (at 24V DC) | |
| ON voltage/ON current | 15V DC or higher/4mA or higher | 19V DC or higher/3mA or higher | |
| OFF voltage/OFF current | 8V DC or lower/2mA or lower | 9V DC or lower/1.7mA or lower | |
| Input resistance | 3.8kΩ | 5.7kΩ | |
| Response time | OFF to ON | 1ms, 5ms, 10ms, 20ms, 70ms or less Initial setting is 10ms. | |
| | ON to OFF | | |
| Common terminal arrangement | 16 points/common | 32 points/common | |
| Maximum number of modules specification | Counts as 1 module | | |
| Number of occupied I/O points | 16 points (I/O allocation: input 16 points) | 32 points (I/O assignment: input 32 points) | 64 points (I/O allocation: input 64 points) |
| External connections | 18-point terminal block | 40-pin connector | 40-pin connector x2 |
| 5V DC internal current consumption | 90mA (TYP. all points ON) | 100mA (TYP. all points ON) | 120mA (TYP. all points ON) |
| Weight | 0.15kg | 0.11kg | 0.12kg |

Output module specifications

Contact output module

| Item | LY10R2 | | |
|---|---|---|--------------------|
| Number of output points | 16 points | | |
| Rated switching voltage, current | 24V DC 2A (resistive load)/point, 8A/common 240V AC 2A (COSφ=1)/point, 8A/common | | |
| Minimum switching load | 5V DC 1mA | | |
| Maximum switching load | 264V AC 125V DC | | |
| Response time | OFF to ON | 10ms or less | |
| | ON to OFF | 12ms or less | |
| Life | Mechanical | 20 million times or more | |
| | Electrical | Usage environment | Switching life |
| | | Rated switching voltage/current, rated load | 100 thousand times |
| | | 200V AC 1.5A, 240V AC 1A (COSφ = 0.7) | 100 thousand times |
| | | 200V AC 0.4A, 240V AC 0.3A (COSφ = 0.7) | 300 thousand times |
| | | 200V AC 1A, 240V AC 0.5A (COSφ = 0.35) | 100 thousand times |
| | | 200V AC 0.3A, 240V AC 0.15A (COSφ = 0.35) | 300 thousand times |
| 24V DC 1A, 100V DC 0.1A (L/R = 7ms) | 100 thousand times | | |
| 24V DC 0.3A, 100V DC 0.03A (L/R = 7ms) | 300 thousand times | | |
| Maximum switching frequency | 3600 times/hour | | |
| Surge suppressor | — | | |
| Fuse | — | | |
| Common terminal arrangement | 16 points/common | | |
| Maximum number of modules specification | Counts as 1 module | | |
| Number of occupied I/O points | 16 points (I/O assignment: 16 input points) | | |
| External connections | 18-point terminal block | | |
| 5V DC internal current consumption | 460mA (TYP. all points ON) | | |
| Weight | 0.21kg | | |

Output module specifications

Triac output

| Item | LY20S6 |
|---|--|
| Number of output points | 16 points |
| Rated load voltage, frequency | 100 to 240V AC (+10%/-15%), 50/60Hz(±3Hz) |
| Maximum load current | 0.6A/point, 4.8A/common |
| Load voltage distortion ratio | Within 5% |
| Maximum load voltage | 264V AC |
| Minimum load voltage/current | 24V AC/100mA, 100V AC/25mA, 240V AC/25mA |
| Maximum inrush current | 20A/cycle or less |
| Leakage current at OFF | 3mA or lower (at 240V, 60Hz), 1.5mA or lower (at 120V, 60Hz) |
| Maximum voltage drop at ON | 1.5V or lower (at load current of 0.6A) |
| Response time | OFF to ON |
| | ON to OFF |
| Surge suppressor | Total of 1ms and 0.5 cycles or less |
| Fuse | Total of 1ms and 0.5 cycles or less (rated load, resistive load) |
| Common terminal arrangement | CR absorber |
| Maximum number of modules specification | None (Attaching a fuse to each external wiring is recommended.) |
| Number of occupied I/O points | 16 points/common |
| External connections | Counts as 1 module |
| 5V DC internal current consumption | 16 points (I/O assignment: output 16 points) |
| Weight | 18-point terminal block |
| | 300mA (TYP. all points ON) |
| | 0.22kg |

Transistor output (Sink type)

| Item | LY40NT5P | LY41NT1P | LY42NT1P |
|---|---|--|--|
| Number of output points | 16 points | 32 points | 64 points |
| Rated load voltage | 10.2 to 28.8V DC | | |
| Maximum load current | 0.5A/point, 5A/common | 0.1A/point, 2A/common | |
| Maximum inrush current | Current is limited by the overload protection function. | | |
| Leakage current at OFF | 0.1mA or less | | |
| Maximum voltage drop at ON | 0.2V DC(TYP.)0.5A, 0.3V DC(MAX.)0.5A | 0.1V DC (TYP.) 0.1A, 0.2V DC (MAX.) 0.1A | |
| | | 0.5ms or less | |
| Response time | OFF to ON | 1ms or less (rated load, resistance load) | |
| | ON to OFF | | |
| Surge suppressor | Zener diode | | |
| Fuse | — | | |
| Protection function | Overload protection | Limited current when detecting overcurrent (overload protection): 1.5 to 3.5A/point. Activated in increments of 1 point. | Overcurrent detection/overload protection limit current: 1 to 3A/point, Activated in increments of 1 point |
| | Overheat protection | Activated in increments of 1 point | |
| External power supply | Voltage | 12/24V DC (ripple rate: 5% or less) (allowable voltage range: 10.2 to 28.8VDC) | |
| | Current | 9mA (at 24V DC)/common | 13mA (at 24V DC)/common |
| Common terminal arrangement | 16 points/common | 32 points/common | |
| Maximum number of modules specification | Counts as 1 module | | |
| Number of occupied I/O points | 16 points (I/O assignment: 16 output points) | 32 points (I/O assignment: 32 output points) | 64 points (I/O assignment: 64 output points) |
| External connections | 18-point terminal block | 40-pin connector | 40-pin connector x2 |
| 5V DC internal current consumption | 100mA (TYP. all points ON) | 140mA (TYP. all points ON) | 190mA (TYP. all points ON) |
| Weight | 0.15kg | 0.11kg | 0.12kg |

Transistor output (Source type)

| Item | LY40PT5P | LY41PT1P | LY42PT1P |
|---|---|--|--|
| Number of output points | 16 points | 32 points | 64 points |
| Rated load voltage | 10.2 to 28.8V DC | | |
| Maximum load current | 0.5A/point, 5A/common | 0.1A/point, 2A/common | |
| Maximum inrush current | Current is limited by the overload protection function. | | |
| Leakage current at OFF | 0.1mA or less | | |
| Maximum voltage drop at ON | 0.2V DC(TYP.)0.5A, 0.3V DC(MAX.)0.5A | 0.1V DC (TYP.) 0.1A, 0.2V DC (MAX.) 0.1A | |
| | | 0.5ms or less | |
| Response time | OFF to ON | 1ms or less (rated load, resistance load) | |
| | ON to OFF | | |
| Surge suppressor | Zener diode | | |
| Fuse | — | | |
| Protection function | Overload protection | Overcurrent detection: 1.5A or more/point. Activated in increments of 1 point. | Limited current when detecting overcurrent (overload protection): 1 to 3A/point. Activated in increments of 1 point. |
| | Overheat protection | Activated in increments of 1 point. | Activated in increments of 2 points. |
| External power supply | Voltage | 12/24V DC (ripple rate: 5% or less) (allowable voltage range: 10.2 to 28.8VDC) | |
| | Current | 17mA (at 24V DC)/common | 20mA (at 24V DC)/common |
| Common terminal arrangement | 16 points/common | 32 points/common | |
| Maximum number of modules specification | Counts as 1 module | | |
| Number of occupied I/O points | 16 points (I/O assignment: 16 output points) | 32 points (I/O assignment: 32 output points) | 64 points (I/O assignment: 64 output points) |
| External connections | 18-point terminal block | 40-pin connector | 40-pin connector x2 |
| 5V DC internal current consumption | 100mA (TYP. all points ON) | 140mA (TYP. all points ON) | 190mA (TYP. all points ON) |
| Weight | 0.15kg | 0.11kg | 0.12kg |

I/O combined module specifications DC input/transistor output combined module

| Item | LH42C4NT1P | LH42C4PT1P |
|---|--|---|
| ■ Input specifications | | |
| Number of input points | 32 points | |
| Rated input voltage | 24V DC (ripple rate: 5% or less) (allowable voltage range: 20.4 to 28.8V DC) | |
| Rated input current | 4.0mA TYP. (at 24V DC) | |
| Input ON voltage/ON current | 19V DC or higher/3mA or higher | |
| Input OFF voltage/OFF current | 9V DC or lower/1.7mA or lower | |
| Input resistance | 5.7kΩ | |
| Input response time | 1ms, 5ms, 10ms, 20ms, 70ms or less (Initial setting is 10ms) | |
| Input common terminal arrangement | 32 points/common | |
| ■ Output specifications | | |
| Output format | Transistor output combined module (Sink type) | Transistor output combined module (Source type) |
| Number of output points | 32 points | |
| Rated load voltage | 10.2 to 28.8V DC | |
| Maximum load current | 0.1A/point, 2A/common | |
| Maximum inrush current | Current is limited by the overload protection function. | |
| Leakage current at OFF | 0.1mA or less | |
| Maximum voltage drop at ON | 0.1V DC (TYP.) 0.1A, 0.2V DC (MAX.) 0.1A | |
| Output response time | 0.5ms or less 1ms or less (rated load, resistance load) | |
| Surge suppressor | Zener diode | |
| Fuse | — | |
| Protection function | Limited current when detecting overcurrent (overload protection): 1 to 3A/point, Activated in increments of 1 point. | |
| | Overload protection | Activated in increments of 1 point |
| | Overheat protection | Activated in increments of 2 points. |
| Output common terminal arrangement | 32 points/common | |
| ■ Common specifications | | |
| External power supply | 12/24V DC (ripple rate: 5% or less) (allowable voltage range: 10.2 to 28.8VDC) | |
| | Voltage | 9mA (at 24V DC)/common |
| | Current | 20mA (at 24V DC)/common |
| Maximum number of modules specification | Counts as 1 module | |
| Number of occupied I/O points | 32 points (I/O assignment: input/output 32 points) | |
| External connections | 40-pin connector x2 | |
| 5V DC internal current consumption | 160mA (TYP. all points ON) | 150mA (TYP. all points ON) |
| Weight | 0.12kg | |

How to read the product code

• For input module or output module

• For I/O combined module

L Y 4 0 NT 5 P **L H 4 2 C4 NT1 P**


① ② ③ ④ ⑤ ⑥ ① ② ③ ④ ⑤ ④ ⑤ ⑥

| Number | Item | Code | Specification | | | | |
|--------|-----------------------|-------|--|--------|-----------------------|----------------|--------------|
| ① | Module type | X | Input | | | | |
| | | Y | Output | | | | |
| | | H | I/O combined | | | | |
| Number | Item | Code | Input specifications | | Output specifications | | |
| ② | Voltage specification | 1 | 100 to 120V AC | — | 24V DC/240V AC | — | — |
| | | 2 | 100 to 240V AC | — | — | 100 to 240V AC | — |
| | | 4 | — | 24V DC | — | — | 12 to 24V DC |
| Number | Item | Code | Specification | | | | |
| ③ | I/O points | 0 | 16 points | | | | |
| | | 1 | 32 points | | | | |
| | | 2 | 64 points | | | | |
| | | 8 | 8 points | | | | |
| Number | Item | Code | Specification | | | | |
| ④ | I/O type | Blank | AC input | | | | |
| | | C | DC input (positive/negative shared common) | | | | |
| | | NT | Transistor output module (Sink type) | | | | |
| | | PT | Transistor output module (Source type) | | | | |
| | | R | Contact output | | | | |
| | | S | Triac output | | | | |
| Number | Item | Code | Input specifications | | Output specifications | | |
| ⑤ | Current specification | 1 | — | — | — | — | 0.1A |
| | | 2 | — | — | 2A | — | — |
| | | 4 | — | 4mA | — | — | — |
| | | 5 | — | — | — | — | 0.5A |
| | | 6 | — | 6mA | — | 0.6A | — |
| Number | Item | Code | Specification | | | | |
| ⑥ | Extra Specifications | P | Includes protection function | | | | |

Analog Input Module

| | | | | | |
|---|---|---|--|---|--|
| <div style="background-color: black; color: white; padding: 2px 5px; display: inline-block;">Analog Input</div> |  | <p>L60AD4</p> <p>Number of inputs : 4 channels Input voltage : -10 to 10V DC Input current : 0 to 20mA DC Conversion speed : 20μs/channel Resolution : 1/20000 Accuracy : ±0.1%</p> | <div style="background-color: black; color: white; padding: 2px 5px; display: inline-block;">Dual channel Isolation Analog Input</div> |  | <p>L60AD4-2GH</p> <p>Number of inputs : 4 channels Input voltage : -10 to 10V DC Input current : 0 to 20mA DC Conversion speed: 40μs/2 channels Resolution : 1/32000 Accuracy : ±0.05%</p> |
|---|---|---|--|---|--|

Analog Output Module

| | | |
|--|---|---|
| <div style="background-color: black; color: white; padding: 2px 5px; display: inline-block;">Analog Output</div> |  | <p>L60DA4</p> <p>Number of outputs: 4 channels Output voltage : -10 to 10V DC Output current : 0 to 20mA DC Conversion speed : 20μs/channel Resolution : 1/20000 Accuracy ±0.1%</p> |
|--|---|---|

Analog I/O module

| | | | |
|---|---|--|--|
| <div style="background-color: black; color: white; padding: 2px 5px; display: inline-block;">Analog I/O</div> |  | <p>L60AD2DA2</p> <p>Analog input specifications Number of inputs : 2 channels Input voltage : -10 to 10V DC Input current : 0 to 20mA DC Conversion speed : 80μs/channel Resolution : 1/12000 Accuracy : ±0.2%</p> | <p>Analog output specifications Number of outputs : 2 channels Output voltage : -10 to 10V DC Output current : 0 to 20mA DC Conversion speed : 80μs/channel Resolution : 1/12000 Accuracy : ±0.2%</p> |
|---|---|--|--|

| Function | Analog Input Module | | Analog Output Module | Analog I/O module | |
|---|---------------------|----------------|----------------------|-------------------|----------------|
| | L60AD4 | L60AD4-2GH | L60DA4 | L60AD2DA2 | |
| | A/D conversion | A/D conversion | D/A conversion | A/D conversion | D/A conversion |
| Shift function | ● | ● | — | — | — |
| Scaling function | ● | ● | ● | ● | — |
| Digital filtering function | — | ● | — | — | — |
| Time lag filter function | — | ● | — | — | — |
| Logging function | ● | ● | — | ● | — |
| Difference conversion function | ● | ● | — | — | — |
| Input signal error detection function | ● | ● | — | ● | — |
| Input signal error detection extension function | ● | — | — | — | — |
| Input range extended mode function | ● | ● | — | ● | — |
| Flow amount integration function | ● | — | — | — | — |
| Conversion speed switch function | ● | — | — | — | — |
| Warning output function | Process alarm | ● | ● | — | ● |
| | Rate alarm | — | ● | — | — |
| Trigger conversion function | — | ● | — | — | — |
| Analog output HOLD/CLEAR function | — | — | ● | — | ● |
| Wave output function | — | — | ● | — | ● |

Easily and finely adjust the system startup time with the shift function.

L60AD4 L60AD4-2GH

Shift function*1



Using this function, the set shifting amount to conversion value can be added (shifted) to the digital output value. When the shifting amount to conversion value is changed, it is reflected to the scaling value (digital operation value) in real time. Therefore, fine adjustment can be easily performed when the system starts.

*1: Compatible with L60AD4 analog input modules starting with serial No. "13041" or higher.

For L60AD4

| ■ Before adjustment | |
|---------------------|----------------------|
| Input voltage (V) | Digital output value |
| 0 | -10 |
| 5 | 19990 |

| ■ After adjustment | |
|--------------------|---|
| Input voltage (V) | Scaling value (digital operation value) |
| 0 | 0 |
| 5 | 20000 |

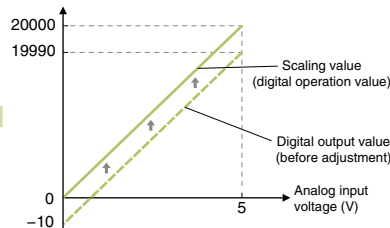

Reduce the time taken for programming


L60AD4 L60AD4-2GH L60DA4 L60AD2DA2

Scaling function

The scaling function converts values directly to easy-to-understand units without requiring any programming. Since a separate conversion program is not required, the number of overall programming steps can be reduced.

Scaling settings example (L60AD4)

Normally an analog input of 4 to 20mA is converted to a digital value from 0 to 20000. Using the scaling feature, the same input can result in a digital value of ±20000.

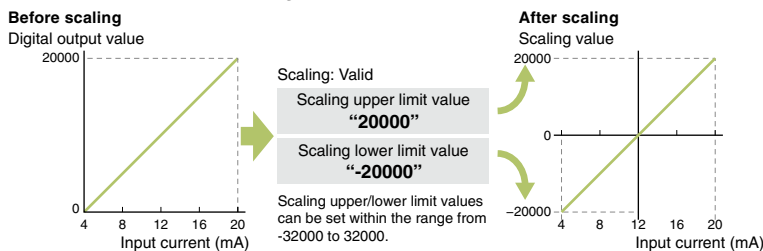

| Input current (mA) | Digital output value | Scaling value |
|--------------------|----------------------|---------------|
| 4 | 0 | -20000 |
| 8 | 5000 | -10000 |
| 12 | 10000 | 0 |
| 16 | 15000 | 10000 |
| 20 | 20000 | 20000 |

Digital filtering function*2

This function eliminates unnecessary frequency elements with simple parameter settings. Select from low pass filter, high pass filter or band pass filter.

Programming steps can be further reduced as extra ladder code is not required to achieve the filter processing.

The filtered A/D conversion program is available at the same time as conversion completion, reducing the overall conversion to filter process time.

■ When low pass is processed with ladder
When requiring a filter processing program, more than 300 lines are necessary.

Not required when using digital filter function

■ Total time when processing digital filter with ladder

Time lag filter function*2

The time lag filter function constant outputs a digital value which filters out (smooths) the excessive noise.

*2: Supported only with L60AD4-2GH.

Log data for up to 10,000 points

L60AD4 L60AD4-2GH L60AD2DA2

Logging function*1

Data is continuously collected at the set cycle and stored in the buffer memory.

Data stored in the buffer memory can be used for debugging, and to periodically confirm data variations.


| Item | Description | | |
|------------------------------|---|---|---|
| | L60AD4 | L60AD4-2GH | L60AD2DA2 |
| Collectable points | 10000 points/channel | | |
| Collectable data | Digital output value or scaling value (digital operation value) | | |
| Logging cycle*2 | 80 to 32767µs 1 to 32767ms 1 to 3600s | 40 to 32767µs 1 to 32767ms 1 to 3600s | 80 to 32767µs 1 to 32767ms 1 to 3600s |
| Conversion speed | 80µs, or 1ms | 40µs/2 channels | 80µs |
| Level trigger condition | Above, Below, Pass Through | | |
| Logging points after trigger | 1 to 10000 | | |

*1: Compatible with L60AD4 analog input modules starting with serial No. "13041" or higher.

*2: The actual logging cycle is "an integral multiple of the conversion cycle of each A/D conversion method".
Ex.) When using the sampling processing: Conversion cycle = conversion speed × number of channels in use.

The logging data can be analyzed with the GX LogViewer.

When an error is detected in the digital value:

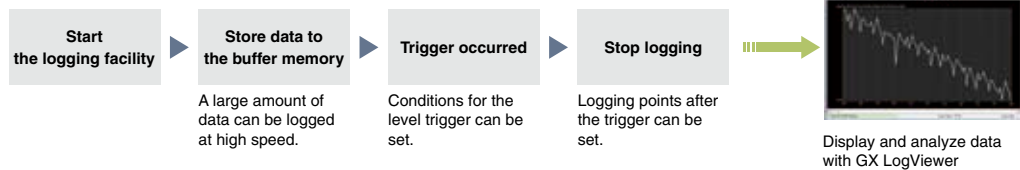


Logging data can be transferred to the CPU device memory while still logging.

Logging and data transmission can be executed simultaneously so the next logging session can be started right away.

Logging for 10,000 points and greater

When logging of 1001 - 2000 points of data commences, the first 1000 points (1 - 1000) are stored into the CPU device memory. By storing every 1000 points of data in the CPU, overall logging of total data larger than 1000 points can be logged.

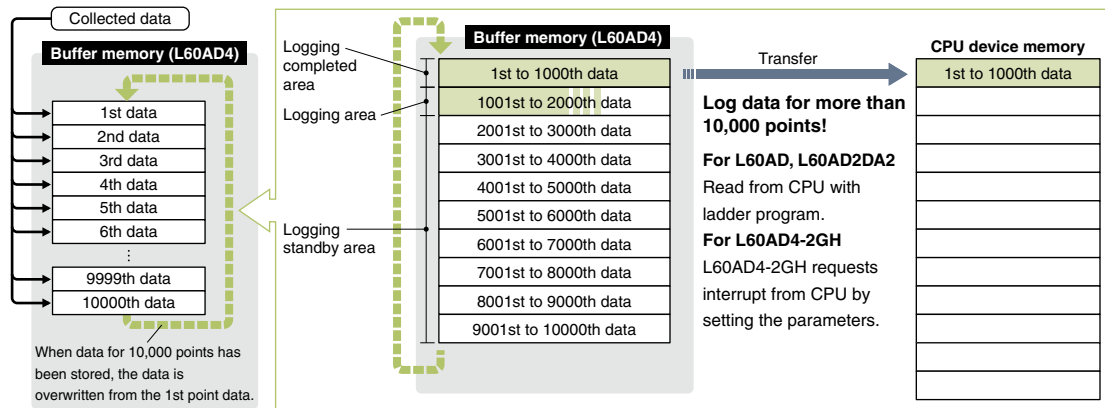


Easily measure part thicknesses!

L60AD4 L60AD4-2GH

Difference conversion function*3

When the difference conversion starts, the scaling value (digital operation value) at that time is determined as the difference conversion reference value. The value acquired by subtracting the difference conversion reference value from the scaling value (digital operation value) is stored as the scaling value (digital operation value) after difference conversion.

For L60AD4

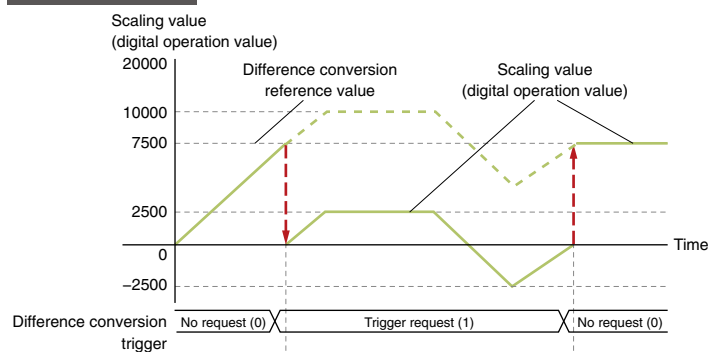

$$\text{Scaling value (digital operation value) after difference conversion} = \text{Scaling value (digital operation value)} - \text{Difference conversion reference value}$$

*3: Compatible with L60AD4 analog input modules starting with serial No. "13041" or higher.

Extend the detection method according to applications

L60AD4 L60AD4-2GH L60AD2DA2

Input signal error detection extension function*1 *2

Using this function, the detection method of the input signal error detection function can be extended. Use this function to detect an input signal error only at the lower or upper limit, or to execute the disconnection detection.

Input range extension function*1

The input range can be extended. By combining this function with the input signal error detection function, simple disconnection detection can be executed.

*1: Compatible with the L60AD4 modules starting with serial No. "13041" or higher.

*2: Only the input signal error detection function can be used with the L60AD4-2GH and L60AD2DA2.


Connected devices monitoring alarm

L60AD4 L60AD4-2GH L60DA4 L60AD2DA2

Warning output function

■ Process Alarm


Outputs an alarm when the digital output value enters a preset alarm range.

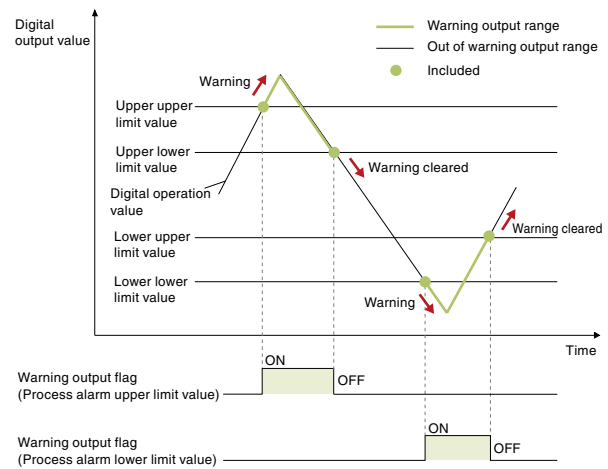

■ Rate alarm*3

An alarm is generated if the digital output value's variation rate is larger than the rate alarm upper limit value, or if it is smaller than the rate alarm lower limit value.

*3: Supported only with L60AD4-2GH.

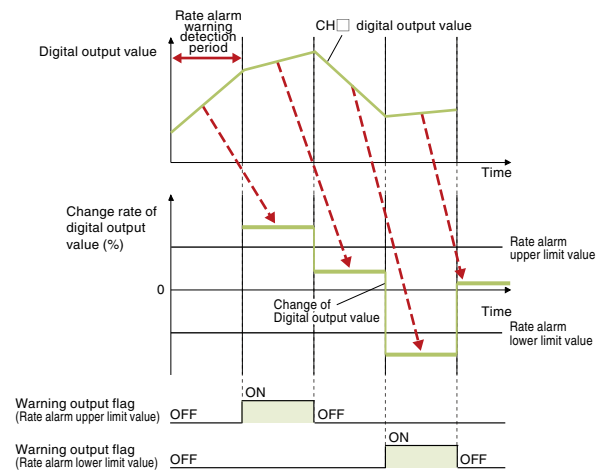


Noise isolation for smoother system operation

L60AD4-2GH

Dual channel isolation

Noise interference is prevented by isolating every two channels resulting in far more stable measurements.

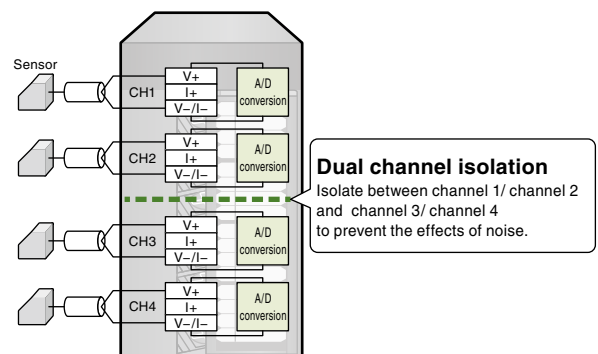

A/D variable conversion timing



L60AD4-2GH

Trigger conversion function

A/D conversion is processed at the rising edge of the trigger position timing.

This function enables easier use of the converter and enhances the overall program performance.

There are two types of trigger conversion request: “External trigger conversion request (external input terminal)” or “internal trigger conversion request (buffer memory)”.

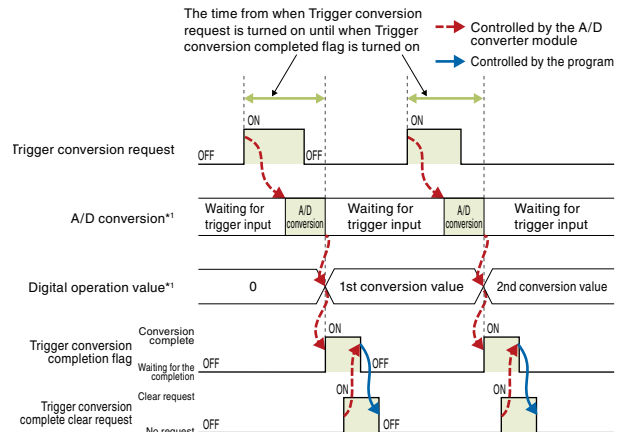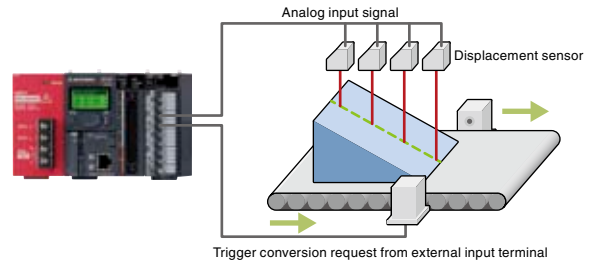

*1: Carried out in order with combination of channel 1, channel 3 and channel 2, channel 4.

Quickly calculate and record flow amount

L60AD4

Flow amount integration function*2


This function performs the A/D conversion of analog input value (voltage or current) from a flow meter and others, and integrates the scaling value (digital operation value) by every integration cycle. In this function, integral processing is performed regarding the scaling value (digital operation value) as the instantaneous flow amount.

■ Concept of integral processing

With this function, integral processing is performed using the following formula.

$$\text{Integrated flow amount} = \left(\text{Instantaneous flow amount} \times \frac{\Delta T}{T} \times \text{Unit scaling} \right) + \text{Previous amount}$$

*2: This function is compatible with analog input modules starting with serial No. “13041” or higher.

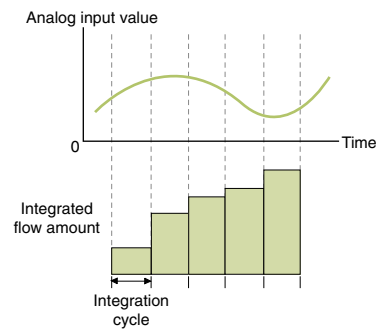

| Item | Description | | |
|---------------------------|---|--|--------------|
| Integrated flow amount | Result of integral processing | | |
| Instantaneous flow amount | Instantaneous flow amount value output in analog from flow meter | | |
| ΔT | Integration cycle (ms) | | |
| T | Conversion value to convert time unit of instantaneous flow amount to ms unit | | |
| | Range of flow meter | Setting value to specify flow amount time unit | T (ms) |
| | /s | 0 | 1000 |
| | /min | 1 | 60000 |
| /h | 2 | 3600000 | |
| Unit scaling | Unit scaling for integrated flow amount | | |
| | This is used when the value of instantaneous flow amount $\times \Delta T/T$ is 0 to 1. | | |
| | Setting value to specify unit scaling | | Unit scaling |
| | 0 | 1 | |
| | 1 | 10 | |
| 2 | 100 | | |
| 3 | 1000 | | |
| 4 | 10000 | | |
| Previous amount | Stored integrated flow amount value before integral processing | | |

Realize fast and smooth continuous analog output

L60DA4 L60AD2DA2

Wave output function^{*1}

The industry's first^{*2} waveform output function is included.

This function enables control wave data that is faster than the program control to be directly registered in the D/A converter module and output the data at a set conversion cycle.


Therefore, the analog output value is not affected by the scan time of the CPU module resulting in faster and smoother analog control.

*1: Compatible with the L60DA4 modules with first five serial number digits are "14041" or later.

*2: Mitsubishi Electric survey dated April 2012.

Analog output from sequence program.

Analog values are output at each scan time.

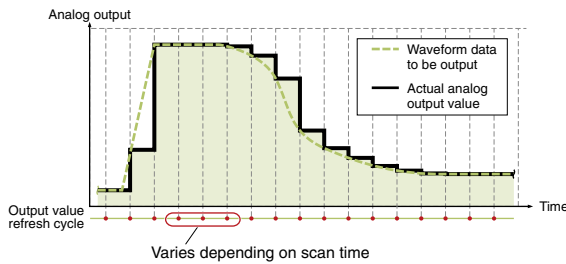


The actual waveform and the output waveform deviate.



Analog output with waveform output function


Analog values are output at set interval.

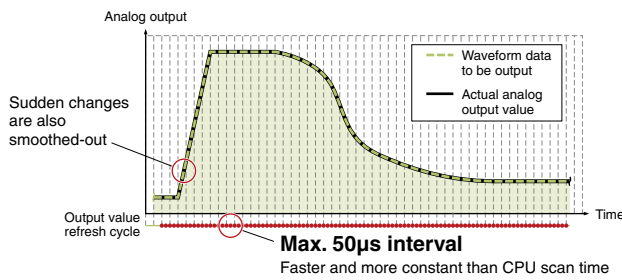

The output waveform is closer to the actual waveform (less deviation).


Register up to 50000 points of waveform output data

① Using GX Works2 to create the waveform output data to be analog output

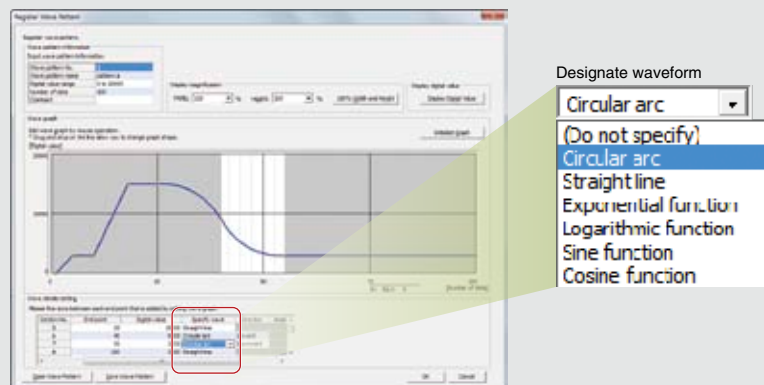


By registering the waveform patterns (multiple), they can be combined freely with the tool.

② Save waveform output data into CPU module's file resister (or SD memory card)

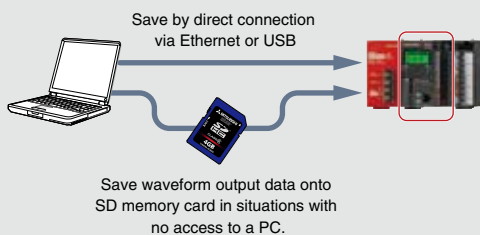

③ Execute the function block (FB)^{*3} and register into analog output module

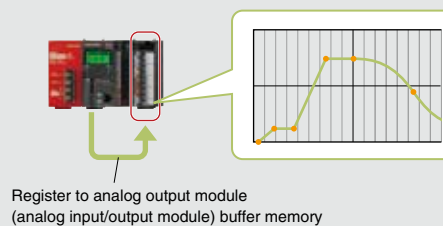

*3: Contact your local Mitsubishi Electric sales office or representative.

Easily adjust waveform output data

L60DA4 L60AD2DA2

Wave output step action function^{*1}

The waveform output data can be changed even when the analog output module is in conversion. This provides a good way of adjusting the waveform output while in operation.

*1: Compatible with the L60DA4 modules with first five serial number digits are "14041" or later.

Analog output a designated buffer memory's address value


If current address is "14990" (A) the output range is set to -10 to 10V range and receives "waveform output step execution request", the address 15000 (B) and address 14995 (C) data is executed.

| Address | Waveform output data (digital value) |
|-----------|--------------------------------------|
| 14986 | -10000 |
| 14987 | -8000 |
| 14988 | -6000 |
| 14989 | -2000 |
| 14990 (A) | 0 |
| 14991 | 2000 |
| 14992 | 4000 |
| 14993 | 6000 |
| 14994 | 8000 |
| 14995 (C) | 10000 |
| 14996 | 12000 |
| 14997 | 14000 |
| 14998 | 16000 |
| 14999 | 18000 |
| 15000 (B) | 20000 |

The designated address value can be changed, so the waveform output data can also be adjusted.

| Address | Waveform output data (digital value) |
|---------|--------------------------------------|
| 14992 | 4000 |
| 14993 | 6000 |
| 14994 | 8000 |
| 14995 | 10000 |
| 14996 | 12000 |
| 14997 | 14000 |
| 14998 | 16000 |
| 14999 | 18000 |
| 15000 | 20000 |

→ 8200

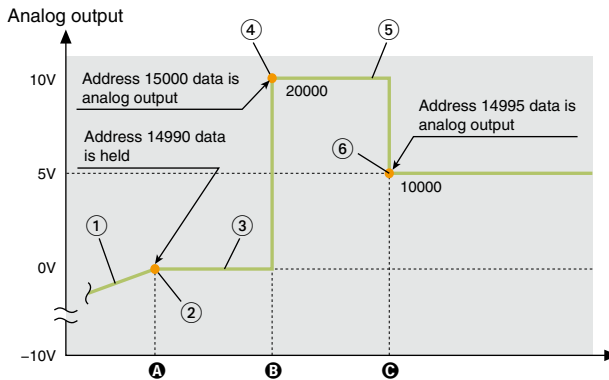

Address can be moved to data to be output and the output value can be output

Combining 2 separate modules into one

L60AD2DA2

The combined analog input/output module has 2 separate A/D and D/A channels, realizing a space and cost saving system as only one module is required to do the same functions as 2 single modules.

In the past ...

Cost of 2 separate modules required

"Laborious settings with twice the space"

The L60AD2DA2 number of I/O channels, conversion speed and resolution may differ compared to the L60AD4 and L60DA4.

From now on ...

Reduce I/O costs by 50%

■ Analog input module specifications

| Item | | L60AD4 | | | | | | | | | | | | | | | | | | | |
|---|---------------------------------|---|----------------------|----------------------|------------|----------|------------|-------|---------|-------|---------|-------|------------|-----------------|-------|-------------------------|----------------|-------|---------------------|-----------------|---------------------|
| Number of analog input channels | | 4 channels | | | | | | | | | | | | | | | | | | | |
| Analog input | Voltage | -10 to 10V DC (Input resistance value 1MΩ) | | | | | | | | | | | | | | | | | | | |
| | Current | 0 to 20mA DC (Input resistance value 250Ω) | | | | | | | | | | | | | | | | | | | |
| Digital output | | -20480 to 20479 | | | | | | | | | | | | | | | | | | | |
| | When using the scaling function | -32768 to 32767 | | | | | | | | | | | | | | | | | | | |
| I/O characteristics, resolution | Voltage | <table border="1"> <thead> <tr> <th>Analog input range</th> <th>Digital output value</th> <th>Resolution</th> </tr> </thead> <tbody> <tr> <td>0 to 10V</td> <td rowspan="3">0 to 20000</td> <td>500μV</td> </tr> <tr> <td>0 to 5V</td> <td>250μV</td> </tr> <tr> <td>1 to 5V</td> <td>200μV</td> </tr> <tr> <td>-10 to 10V</td> <td>-20000 to 20000</td> <td>500μV</td> </tr> <tr> <td>1 to 5V (Extended mode)</td> <td>-5000 to 22500</td> <td>200μV</td> </tr> <tr> <td>Users range setting</td> <td>-20000 to 20000</td> <td>307μV^{*1}</td> </tr> </tbody> </table> | Analog input range | Digital output value | Resolution | 0 to 10V | 0 to 20000 | 500μV | 0 to 5V | 250μV | 1 to 5V | 200μV | -10 to 10V | -20000 to 20000 | 500μV | 1 to 5V (Extended mode) | -5000 to 22500 | 200μV | Users range setting | -20000 to 20000 | 307μV ^{*1} |
| | | Analog input range | Digital output value | Resolution | | | | | | | | | | | | | | | | | |
| | | 0 to 10V | 0 to 20000 | 500μV | | | | | | | | | | | | | | | | | |
| | | 0 to 5V | | 250μV | | | | | | | | | | | | | | | | | |
| | | 1 to 5V | | 200μV | | | | | | | | | | | | | | | | | |
| | | -10 to 10V | -20000 to 20000 | 500μV | | | | | | | | | | | | | | | | | |
| | 1 to 5V (Extended mode) | -5000 to 22500 | 200μV | | | | | | | | | | | | | | | | | | |
| | Users range setting | -20000 to 20000 | 307μV ^{*1} | | | | | | | | | | | | | | | | | | |
| | Current | 0 to 20mA | 0 to 20000 | 1000nA | | | | | | | | | | | | | | | | | |
| | | 4 to 20mA | | 800nA | | | | | | | | | | | | | | | | | |
| 4 to 20mA (Extended mode) | | -5000 to 22500 | 800nA | | | | | | | | | | | | | | | | | | |
| Users range setting | | -20000 to 20000 | 1230nA ^{*1} | | | | | | | | | | | | | | | | | | |
| Accuracy ^{*2} | Ambient temperature 25±5°C | Within ±0.1% (±20digit) | | | | | | | | | | | | | | | | | | | |
| | Ambient temperature 0 to 55°C | Within ±0.2% (±40digit) | | | | | | | | | | | | | | | | | | | |
| Conversion speed ^{*3,*4} | | High speed: 20μs/channel Medium speed: 80μs/channel Low speed: 1ms/channel | | | | | | | | | | | | | | | | | | | |
| Absolute maximum input | | Voltage: ±15V, Current: 30mA ^{*6} | | | | | | | | | | | | | | | | | | | |
| Isolation method | | Between I/O terminals and programmable controller power supply: photocoupler isolation Between input channels: no isolation | | | | | | | | | | | | | | | | | | | |
| Maximum number of modules specification | | Counts as 1 module | | | | | | | | | | | | | | | | | | | |
| Number of occupied I/O points | | 16 points (I/O assignment: 16 points for intelligent) | | | | | | | | | | | | | | | | | | | |
| External connections | | 18-point terminal block | | | | | | | | | | | | | | | | | | | |
| 5V DC internal current consumption | | 0.52A | | | | | | | | | | | | | | | | | | | |
| Weight | | 0.19kg | | | | | | | | | | | | | | | | | | | |

*1: Maximum resolution in the user range setting.

*2: Accuracy for the maximum value of the digital output value. Except when receiving noise influence.

*3: The default value is 80μs/channel.

*4: The logging function can be used only in the middle speed (80μs/channel) or low speed (1ms/channel).

*5: The flow amount integration function can be used only in the low speed (1ms/channel).

*6: This is a momentary current value which does not cause damage to internal resistors of the module. The maximum input current value for constant application is 24mA.

■ Dual channel isolation analog input module specifications

| Item | | L60AD4-2GH | | | | | | | | | | | | | | | | | | | |
|---|--|--|---|----------------------|------------|----------|------------|---------|---------|-------|---------|-------|------------|-----------------|---------|-------------------------|----------------|-------|--|-----------------|---------------------|
| Number of analog input channels | | 4 channels | | | | | | | | | | | | | | | | | | | |
| Analog input | Voltage | -10 to 10V DC (Input resistance value 1MΩ) | | | | | | | | | | | | | | | | | | | |
| | Current | 0 to 20mA DC (Input resistance value 250Ω) | | | | | | | | | | | | | | | | | | | |
| Digital output | | -32000 to 32000 | | | | | | | | | | | | | | | | | | | |
| | When using the scaling function | -32768 to 32767 | | | | | | | | | | | | | | | | | | | |
| I/O characteristics, resolution | Voltage | <table border="1"> <thead> <tr> <th>Analog input range</th> <th>Digital output value</th> <th>Resolution</th> </tr> </thead> <tbody> <tr> <td>0 to 10V</td> <td rowspan="3">0 to 32000</td> <td>312.5μV</td> </tr> <tr> <td>0 to 5V</td> <td>156μV</td> </tr> <tr> <td>1 to 5V</td> <td>125μV</td> </tr> <tr> <td>-10 to 10V</td> <td>-32000 to 32000</td> <td>312.5μV</td> </tr> <tr> <td>1 to 5V (Extended mode)</td> <td>-8000 to 32000</td> <td>125μV</td> </tr> <tr> <td>Users range setting (Bipolar: voltage)</td> <td>-32000 to 32000</td> <td>200μV^{*7}</td> </tr> </tbody> </table> | Analog input range | Digital output value | Resolution | 0 to 10V | 0 to 32000 | 312.5μV | 0 to 5V | 156μV | 1 to 5V | 125μV | -10 to 10V | -32000 to 32000 | 312.5μV | 1 to 5V (Extended mode) | -8000 to 32000 | 125μV | Users range setting (Bipolar: voltage) | -32000 to 32000 | 200μV ^{*7} |
| | | Analog input range | Digital output value | Resolution | | | | | | | | | | | | | | | | | |
| | | 0 to 10V | 0 to 32000 | 312.5μV | | | | | | | | | | | | | | | | | |
| | | 0 to 5V | | 156μV | | | | | | | | | | | | | | | | | |
| | | 1 to 5V | | 125μV | | | | | | | | | | | | | | | | | |
| | | -10 to 10V | -32000 to 32000 | 312.5μV | | | | | | | | | | | | | | | | | |
| | 1 to 5V (Extended mode) | -8000 to 32000 | 125μV | | | | | | | | | | | | | | | | | | |
| | Users range setting (Bipolar: voltage) | -32000 to 32000 | 200μV ^{*7} | | | | | | | | | | | | | | | | | | |
| | Current | 0 to 20mA | 0 to 32000 | 625nA | | | | | | | | | | | | | | | | | |
| | | 4 to 20mA | | 500nA | | | | | | | | | | | | | | | | | |
| 4 to 20mA (Extended mode) | | -8000 to 32000 | 500nA | | | | | | | | | | | | | | | | | | |
| Users range setting (Unipolar: Current) | | 0 to 32000 | 400nA ^{*7} | | | | | | | | | | | | | | | | | | |
| Accuracy ^{*8} | Reference accuracy ^{*9} | Within ±0.05% (±16digit) | | | | | | | | | | | | | | | | | | | |
| | Temperature coefficient ^{*10} | ±40.1ppm/°C or less | | | | | | | | | | | | | | | | | | | |
| Conversion speed | | 40μs/2 channel | | | | | | | | | | | | | | | | | | | |
| Absolute maximum input | | Voltage: ±15V, Current: 30mA ^{*11} | | | | | | | | | | | | | | | | | | | |
| Isolation method | | Between I/O terminals and programmable controller power supply: photocoupler isolation Between analog input channels: dual channel transformer isolation | | | | | | | | | | | | | | | | | | | |
| Maximum number of modules specification | | Counts as 1 module | | | | | | | | | | | | | | | | | | | |
| Number of occupied I/O points | | 16 points (I/O assignment: 16 points for intelligent) | | | | | | | | | | | | | | | | | | | |
| External connections | | 18-point terminal block | | | | | | | | | | | | | | | | | | | |
| 5V DC internal current consumption | | 0.76A | | | | | | | | | | | | | | | | | | | |
| Weight | | 0.20kg | | | | | | | | | | | | | | | | | | | |
| External trigger input | Input points | | 1 point | | | | | | | | | | | | | | | | | | |
| | Rated input voltage | | 24V DC (+20%/-15%, ripple ratio: within 5%) | | | | | | | | | | | | | | | | | | |
| | Rated input current | | 6.0mA TYP. (at 24V DC) | | | | | | | | | | | | | | | | | | |
| | ON voltage/ON current | | 13V or more, 3mA or more | | | | | | | | | | | | | | | | | | |
| | OFF voltage/OFF current | | 8V or less, 1.6mA or less | | | | | | | | | | | | | | | | | | |
| | Input resistance | | 3.9kΩ | | | | | | | | | | | | | | | | | | |
| | Response time | OFF to ON | 40μs | | | | | | | | | | | | | | | | | | |
| | | ON to OFF | 40μs | | | | | | | | | | | | | | | | | | |

*7: Maximum resolution in the user range setting.

*8: Accuracy for the maximum value of the digital output value. Except when receiving noise influence.

*9: Accuracy under the ambient temperature when the offset/gain setting is performed.

*10: Accuracy when the temperature changes 1°C.

Example: Accuracy when the temperature changes from 25°C to 30°C

$0.05\% + 0.00401\%/^{\circ}\text{C} (\text{temperature coefficient}) \times 5^{\circ}\text{C} (\text{temperature change}) = 0.070\%$

*11: A momentary input current value which does not cause damage to internal resistors of the module. The maximum input current value for constant application is 24mA.

■ Analog output module specifications

| Item | | L60DA4 | | | | | | | | | | | | | | | | | | | |
|---|---------------------------------|---|---------------------|---------------------|------------|---------|---------|-------|---------|-------|------------|-------|---------------------|---------------------|---------|-----------|--------|-----------|-------|---------------------|---------------------|
| Number of analog output channels | | 4 channels | | | | | | | | | | | | | | | | | | | |
| | | -20480 to 20479 | | | | | | | | | | | | | | | | | | | |
| Digital input | When using the scaling function | -32768 to 32767 | | | | | | | | | | | | | | | | | | | |
| Analog output | Voltage | -10 to 10V DC (External load resistance value 1kΩ to 1MΩ) | | | | | | | | | | | | | | | | | | | |
| | Current | 0 to 20mA DC (External load resistance value 0Ω to 600Ω) | | | | | | | | | | | | | | | | | | | |
| I/O characteristics, resolution | | <table border="1"> <thead> <tr> <th>Analog output range</th> <th>Digital value</th> <th>Resolution</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Voltage</td> <td>0 to 5V</td> <td>250μV</td> </tr> <tr> <td>1 to 5V</td> <td>200μV</td> </tr> <tr> <td>-10 to 10V</td> <td>500μV</td> </tr> <tr> <td>Users range setting</td> <td>333μV^{*1}</td> </tr> <tr> <td rowspan="3">Current</td> <td>0 to 20mA</td> <td>1000nA</td> </tr> <tr> <td>4 to 20mA</td> <td>800nA</td> </tr> <tr> <td>Users range setting</td> <td>700nA^{*1}</td> </tr> </tbody> </table> | Analog output range | Digital value | Resolution | Voltage | 0 to 5V | 250μV | 1 to 5V | 200μV | -10 to 10V | 500μV | Users range setting | 333μV ^{*1} | Current | 0 to 20mA | 1000nA | 4 to 20mA | 800nA | Users range setting | 700nA ^{*1} |
| | | Analog output range | Digital value | Resolution | | | | | | | | | | | | | | | | | |
| | | Voltage | 0 to 5V | 250μV | | | | | | | | | | | | | | | | | |
| | | | 1 to 5V | 200μV | | | | | | | | | | | | | | | | | |
| | | | -10 to 10V | 500μV | | | | | | | | | | | | | | | | | |
| | | | Users range setting | 333μV ^{*1} | | | | | | | | | | | | | | | | | |
| | | Current | 0 to 20mA | 1000nA | | | | | | | | | | | | | | | | | |
| 4 to 20mA | 800nA | | | | | | | | | | | | | | | | | | | | |
| Users range setting | 700nA ^{*1} | | | | | | | | | | | | | | | | | | | | |
| Accuracy ^{*2} | Ambient temperature 25±5°C | Within ±0.1% (voltage: ±10mV, current: ±20μA) | | | | | | | | | | | | | | | | | | | |
| | Ambient temperature 0 to 55°C | Within ±0.3% (voltage: ±30mV, current: ±60μA) | | | | | | | | | | | | | | | | | | | |
| Conversion speed | Normal output mode | 20μs/channel | | | | | | | | | | | | | | | | | | | |
| | Wave output mode | 50μs/channel 80μs/channel | | | | | | | | | | | | | | | | | | | |
| Output short protection | | Protected | | | | | | | | | | | | | | | | | | | |
| Isolation method | | Between I/O terminals and programmable controller power supply: photocoupler isolation Between output channels: no insulation Between external power supply and analog output: transformer insulation | | | | | | | | | | | | | | | | | | | |
| Maximum number of modules specification | | Counts as 1 module | | | | | | | | | | | | | | | | | | | |
| Number of occupied I/O points | | 16 points (I/O assignment: 16 points for intelligent) | | | | | | | | | | | | | | | | | | | |
| External connections | | 18-point terminal block 24V DC (+20%/-15%) | | | | | | | | | | | | | | | | | | | |
| External power supply | | Ripple, spike 500mV _{p-p} or lower | | | | | | | | | | | | | | | | | | | |
| | | Inrush current: 4.3A, 1000μs or shorter | | | | | | | | | | | | | | | | | | | |
| | | Current consumption: 0.18A | | | | | | | | | | | | | | | | | | | |
| 5V DC internal current consumption | | 0.16A | | | | | | | | | | | | | | | | | | | |
| Weight | | 0.20kg | | | | | | | | | | | | | | | | | | | |

*1: Maximum resolution in the user range setting.

*2: Accuracy for the maximum value of analog output value. Except when receiving noise influence. Warm up (power on) the module for 30 minutes to satisfy the accuracy shown in the table.

■ Analog input/output module specifications

| Item | | L60AD2DA2 | | | | | | |
|---|---------------------------------|---|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|----------------------|
| ■ A/D conversion part | | | | | | | | |
| Number of analog input channels | | 2 channels | | | | | | |
| Analog input | Voltage | -10 to 10V DC (Input resistance value 1MΩ) | | | | | | |
| | Current | 0 to 20mA DC (Input resistance value 250Ω) | | | | | | |
| Digital output | | -16384 to 16383 | | | | | | |
| | When using the scaling function | -32768 to 32767 | | | | | | |
| I/O characteristics, resolution | Voltage | Analog input range | | Digital output value | Resolution | | | |
| | | 0 to 10V | | 0 to 16000 | 625μV | | | |
| | | 0 to 5V | | 0 to 12000 | 416μV | | | |
| | | 1 to 5V | | | 333μV | | | |
| | | -10 to 10V | | -16000 to 16000 | 625μV | | | |
| | | 1 to 5V (Extended mode) | | -3000 to 13500 | 333μV | | | |
| | Current | Users range setting | | -12000 to 12000 | 321μV*1 | | | |
| | | 0 to 20mA | | 0 to 12000 | 1666nA | | | |
| | | 4 to 20mA | | | 1333nA | | | |
| | | 4 to 20mA (Extended mode) | | -3000 to 13500 | 1333nA | | | |
| | | Users range setting | | -12000 to 12000 | 1287nA*1 | | | |
| | | Accuracy*2 | Voltage | Analog input range | | Ambient temperature | | |
| 0 to 10V | | | | 25±5°C | 0 to 55°C | Within ±0.2% (±32digit) | | |
| -10 to 10V | | | | | | | Within ±0.3% (±48digit) | |
| 0 to 5V | | | | Within ±0.2% (±24digit) | | | | |
| 1 to 5V | | | | | Within ±0.3% (±36digit) | | | |
| 1 to 5V (Extended mode) | | | | | | | | |
| Current | 0 to 20mA | | Within ±0.2% (±24digit) | Within ±0.3% (±36digit) | | | | |
| | 4 to 20mA | | | | | | | |
| | 4 to 20mA (Extended mode) | | | | | | | |
| | Users range setting | | | | | | | |
| | Users range setting | | | | | | | |
| | Users range setting | | | | | | | |
| Conversion speed | | 80μs/channel | | | | | | |
| Absolute maximum input | | Voltage: ±15V, Current: 30mA*3 | | | | | | |
| ■ D/A conversion part | | | | | | | | |
| Number of analog output channels | | 2 channels | | | | | | |
| Digital input | | -16384 to 16383 | | | | | | |
| | When using the scaling function | -32768 to 32767 | | | | | | |
| Analog output | Voltage | -10 to 10V DC (External load resistance value 1kΩ to 1MΩ) | | | | | | |
| | Current | 0 to 20mA DC (External load resistance value 0Ω to 600Ω) | | | | | | |
| I/O characteristics, resolution | Voltage | Analog output range | | Digital value | Resolution | | | |
| | | 0 to 5V | | 0 to 12000 | 416μV | | | |
| | | 1 to 5V | | | 333μV | | | |
| | | -10 to 10V | | -16000 to 16000 | 625μV | | | |
| | | Users range setting | | -12000 to 12000 | 319μV*1 | | | |
| | | Current | 0 to 20mA | | 0 to 12000 | 1666nA | | |
| | 4 to 20mA | | 1333nA | | | | | |
| | Users range setting | | -12000 to 12000 | 696nA*1 | | | | |
| | Accuracy*4 | | Voltage | Analog output range | | Ambient temperature | | |
| | | | | 0 to 5V | | 25±5°C | 0 to 55°C | Within ±0.2% (±10mV) |
| | | | | 1 to 5V | | | | |
| | | -10 to 10V | | Within ±0.2% (±20mV) | | | | |
| 0 to 20mA | | Within ±0.2% (±40μA) | | | | | | |
| 4 to 20mA | | | | Within ±0.4% (±80μA) | | | | |
| Current | | 0 to 20mA | | | Within ±0.2% (±40μA) | Within ±0.4% (±80μA) | | |
| | | 4 to 20mA | | | | | | |
| | | Users range setting | | | | | | |
| | | Users range setting | | | | | | |
| | | Users range setting | | | | | | |
| | | Users range setting | | | | | | |
| Conversion speed | Normal output mode | 80μs/channel | | | | | | |
| | Wave output mode | | | | | | | |
| Output short protection | | Protected | | | | | | |
| ■ Common part | | | | | | | | |
| Isolation method | | Between I/O terminals and programmable controller power supply: photocoupler isolation Between output channels: no insulation Between external power supply and analog output: transformer insulation | | | | | | |
| Maximum number of modules specification | | Counts as 1 module | | | | | | |
| Number of occupied I/O points | | 16 points (I/O assignment: 16 points for intelligent) | | | | | | |
| External connections | | 18-point terminal block 24V DC (+20%/-15%) | | | | | | |
| External power supply | | Ripple, spike 500mV _{P-P} or lower Inrush current: 3.5A, 1000μs or shorter Current consumption: 0.12A | | | | | | |
| 5V DC internal current consumption | | 0.17A | | | | | | |
| Weight | | 0.22kg | | | | | | |


*1: Maximum resolution in the user range setting.

*2: Accuracy for the maximum value of the digital output value. Except when receiving noise influence.

*3: A momentary current value which does not cause damage to internal resistors of the module. The maximum input current value for constant application is 24mA.

*4: Accuracy for the maximum value of the analog output value. Except when receiving noise influence.

Temperature Control Modules

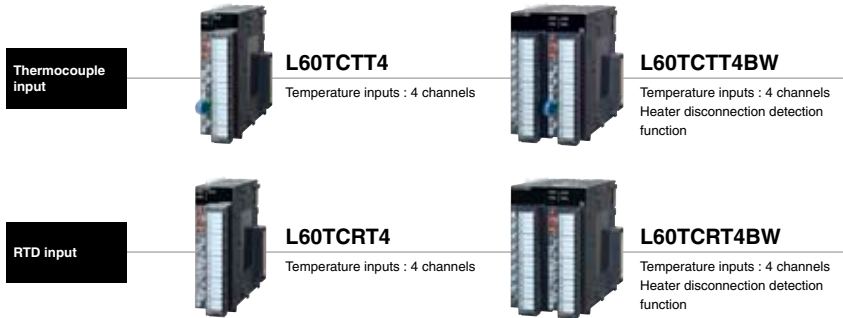

| Function | L60TCTT4 | L60TCTT4BW | L60TCRT4 | L60TCRT4BW |
|---|--------------------|------------|-----------|------------|
| | Thermocouple input | | RTD input | |
| Standard control | ● | ● | ● | ● |
| Heating-cooling control | ● | ● | ● | ● |
| Self-tuning function | ● | ● | ● | ● |
| Peak current suppression function | ● | ● | ● | ● |
| Simultaneous temperature rise function | ● | ● | ● | ● |
| Selectable sampling cycle | ● | ● | ● | ● |
| Temperature input mode | ● | ● | ● | ● |
| Temperature control mode | ● | ● | ● | ● |
| Heater disconnection detection function | — | ● | — | ● |

Highly stable temperature control

Standard control/heating and cooling control


Prevent overheating and overcooling in devices that require a high level of temperature stability, such as in an extrusion molding machine.

The following control methods can be selected according to the target device.

- Standard control (heating or cooling)
- Heating/cooling control (heating and cooling)
- Mix control (combination of standard control and heating-cooling control)

■ Example: Standard control (heating only)


The temperature of the object is controlled by adjusting the heater output based on the PID calculations resulting from the temperature sensor input.

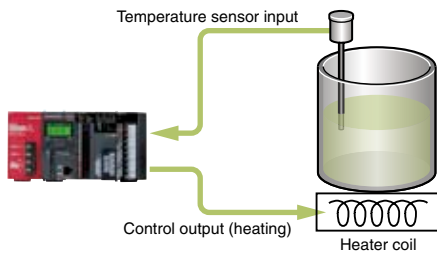

■ Example: Heating-cooling control

(heating and cooling elements controlled simultaneously)

Heating is performed when the control object's temperature is lower than the target temperature, and cooling is performed when it is hotter or the humidity needs to be reduced.

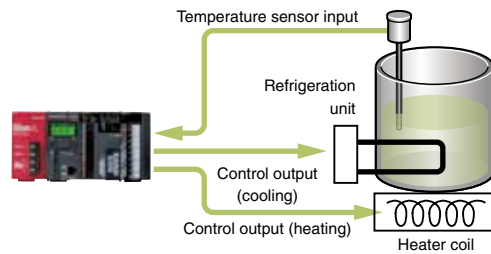


Reduce running costs by taking advantage of the energy-saving effect

Peak current control function


The peak current control function reduces the peak current by automatically changing the upper-output limit value for each channel, while dividing the transistor output timing*1. The energy conserved by reducing the peak current, such as a reduction in system power capacity and reduction in contracted power, can help to reduce running costs.

*1: The timing can be split between two to four outputs.

The maximum power supply capacity requirement is lowered.
We can save money on our electricity contract!

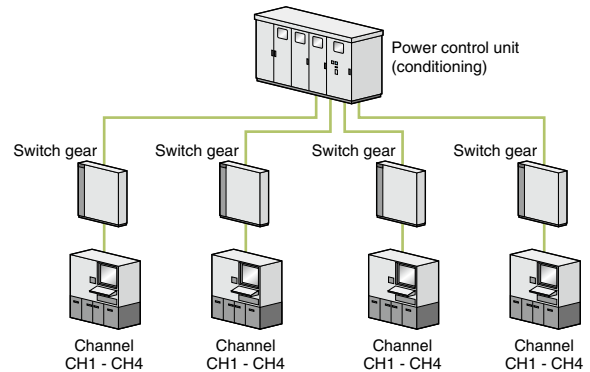

When two or more loads are being controlled, the peak current can be minimized by spreading the total load out over time.

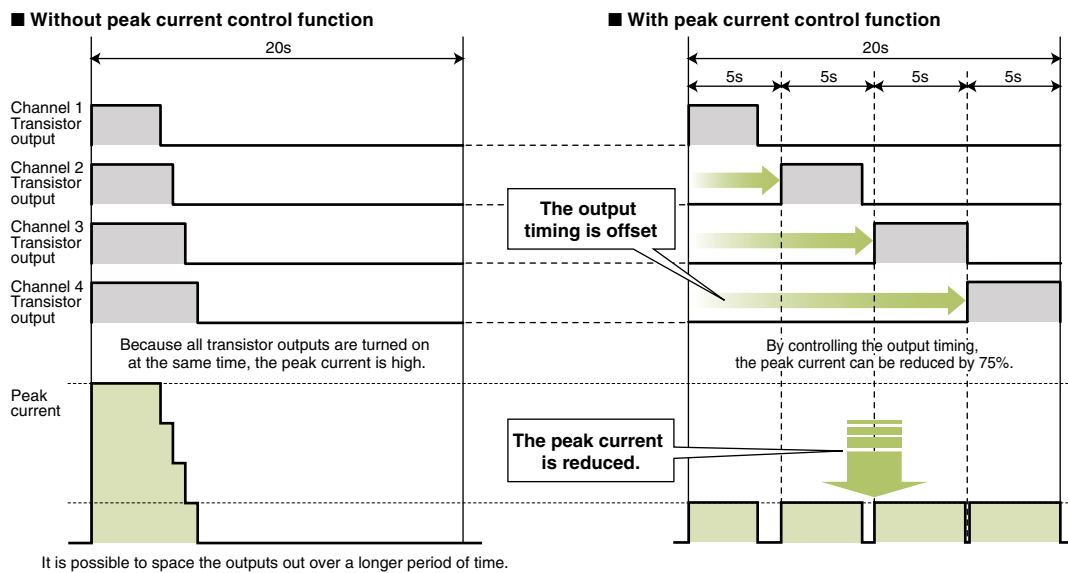


Ensures uniform temperature control

Simultaneous temperature rise function


Ensures uniform temperature control by synchronizing the temperature arrival times from multiple loops. Perform a uniform temperature rise using two or more control loops without going over temperature or resulting in unexpected thermal expansion.

A "no idling" format increases energy efficiency and reduces running costs.

■ **Example: Temperature control of injection molding machine**

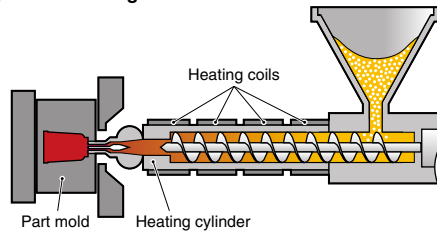


■ **Example: Wafer heating process for semiconductor manufacturing**

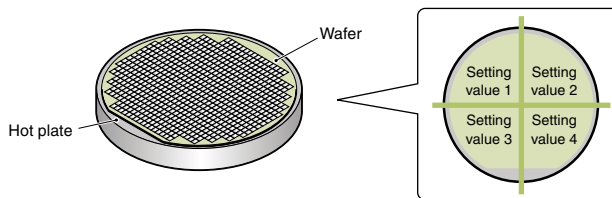


The running costs is reduced!

■ **Without the simultaneous temperature rise function**

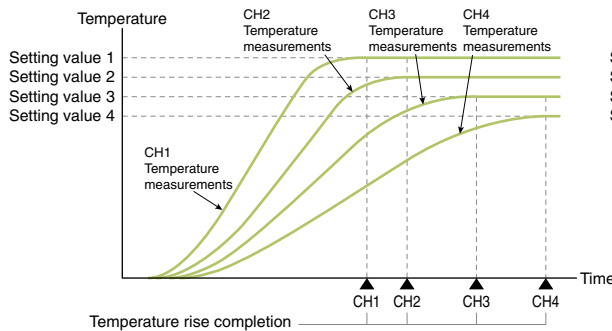

■ **With the simultaneous temperature rise function**

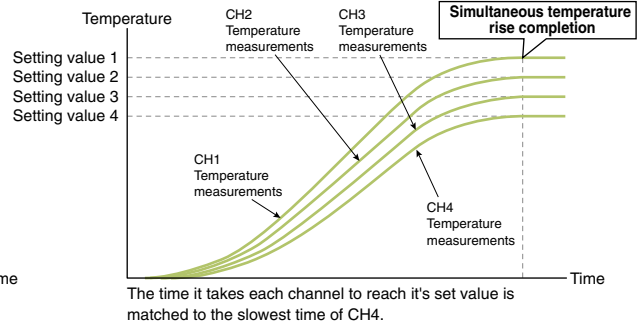


Using this function, it is possible to coordinate the control of two or more loops to reach their target values (SV) at the same time. Control the simultaneous rise in temperature of separate loops by setting a channel group (Max. 2 groups). This is an effective way to control applications where differing target temperature arrival times can result in undesirable temperature differentials.

Support a range of system requirements

Sampling cycle change function

Choose a sampling cycle of 250 ms/4 channels or 500 ms/4 channels.

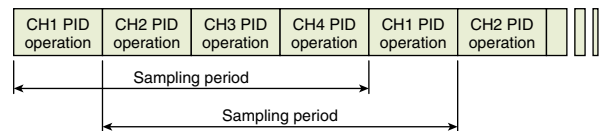


Sampling period: The time it takes to execute a PID operation for all channels (CHn) before beginning the PID operation of the present channel (CHn) again is called a sampling period.

Temperature input mode

This function allows the temperature control module to be used as a standard temperature input module.

Using the switch setting, it is possible to easily change the input mode.

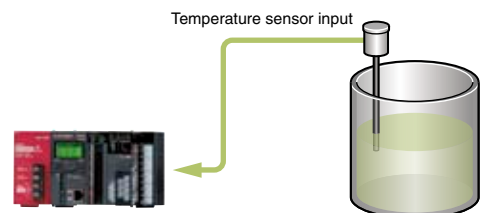

Specifications

| Item | | L60TCTT4 | L60TCTT4BW | L60TCRT4 | L60TCRT4BW |
|---|---|---|--|--|-----------------------------|
| Control output | | Transistor output | | | |
| Number of temperature input channels | | 4 channels | | | |
| Applicable temperature sensors | | Thermocouple | | Resistive thermal device | |
| Accuracy*1 | Indication accuracy | Ambient temperature: 25 ± 5°C | | Full scale × (±0.3%) | |
| | | Ambient temperature: 0 to 55°C | | Full scale × (±0.7%) | |
| | Cold junction temperature compensation accuracy: (ambient temperature: 0 to 55°C) | Temperature process value (PV): -100°C or more | | Within ± 1.0°C | |
| | | Temperature process value (PV): -150 to -100°C | | Within ± 2.0°C | |
| | | Temperature process value (PV): -200 to -150°C | | Within ± 3.0°C | |
| Sampling cycle | | 250ms/4 channels 500ms/4 channels | | | |
| Control output cycle | | 0.5 to 100.0s | | | |
| Input impedance | | 1MΩ | | | |
| Input filter | | 0 to 100s (0: Input filter OFF) | | | |
| Sensor correction value setting | | -50.00 to 50.00% | | | |
| Operation at sensor input disconnection | | Upscale processing | | | |
| Temperature control method | | PID ON/OFF pulse or two-position control | | | |
| PID constants range | PID constants setting | | Can be set by auto tuning. | | |
| | Proportional band (P) | | 0.0 to 1000.0% (0: Two-position control) | | |
| | Integral time (I) | | 0 to 3600s (set 0 for P control and PD control.) | | |
| | Derivative time (D) | | 0 to 3600s (set 0 for P control and PI control.) | | |
| Set value (SV) setting range | | Within the temperature range set in the thermocouple/platinum resistance thermometer to be used | | | |
| Dead band setting range | | 0.1 to 10.0% | | | |
| Transistor output | Output signal | | ON/OFF pulse | | |
| | Rated load voltage | | 10 to 30V DC | | |
| | Max. load current | | 0.1A/point, 0.4A/common | | |
| | Max. inrush current | | 0.4A 10ms | | |
| | Leakage current at OFF | | 0.1mA or less | | |
| | Max. voltage drop at ON | | 1.0V DC (TYP) at 0.1A 2.5V DC (MAX) at 0.1A | | |
| | Response time | | OFF→ON: 2ms or less, ON→OFF: 2ms or less | | |
| Number of accesses to non-volatile memory | | Max. 10 ¹² times | | | |
| Insulation method | | Between input terminal and programmable controller power supply: Transformer insulation Between input channels: Transformer insulation | | | |
| Heater disconnection detection specifications | Current sensor | — | | — | |
| | | • CTL-12-S36-10 (0.0 to 100.0A)*2 • CTL-12-S56-10 (0.0 to 100.0A)*2 • CTL-6-P-H (0.00 to 20.00A)*2 | | • CTL-12-S36-10 (0.0 to 100.0A)*2 • CTL-12-S56-10 (0.0 to 100.0A)*2 • CTL-6-P-H (0.00 to 20.00A)*2 | |
| | Input accuracy | Full scale × (±1.0%) | | Full scale × (±1.0%) | |
| Number of alert delay | | 3 to 255 | | 3 to 255 | |
| Maximum number of modules specification | | Counts as 1 module | Counts as 2 modules | Counts as 1 module | Counts as 2 modules |
| Number of occupied I/O points | | 16 points (I/O assignment: Intelligent 16 points) | | | |
| External connections | | 18-point terminal block | 18-point terminal block × 2 | 18-point terminal block | 18-point terminal block × 2 |
| 5V DC internal current consumption | | 0.30A | 0.33A | 0.31A | 0.35A |
| Weight | | 0.18kg | 0.33kg | 0.18kg | 0.33kg |

*1: Calculate the accuracy in the following method (only when it is not affected by noise).
Accuracy (°C) = full scale × indication accuracy + cold junction temperature compensation accuracy
Ex.) Accuracy at the input range of 38 (-200.0 to 400.0°C), the operating ambient temperature of 35°C, and the temperature process value (PV) of 300°C
(Full scale) × (indication accuracy) + cold junction temperature compensation accuracy
= (400.0°C - (-200.0°C)) × (±0.007) + (±1.0°C)
= ± 5.2°C

*2: U.R.D.Co., LTD. For more information, visit <http://www.u-rd.com/>

Control mode


| Control mode | Contents | Number of controllable loops |
|---|---|---|
| Standard control | Performs the standard control of four channels. | Standard control 4 loops |
| Heating-cooling control (normal mode) | Performs the heating-cooling control. CH3 and CH4 cannot be used. | Heating-cooling control 2 loops |
| Heating-cooling control (expanded mode) | Performs the heating-cooling control. The number of loops is expanded using an output module and others in the system. | Heating-cooling control 4 loops |
| Mix control (normal mode) | Performs the standard control and the heating-cooling control. CH2 cannot be used. | Standard control 2 loops Heating-cooling control 1 loop |
| Mix control (expanded mode) | Performs the standard control and the heating-cooling control. The number of loops is expanded using an output module and others in the system. | Standard control 2 loops Heating-cooling control 2 loops |

Control for each channel is as follows.

| Channel | Standard control | Heating-cooling control | | Mix control | |
|---------|------------------|-------------------------|---------------------------|-------------------------|---------------------------|
| | | Normal mode | Expanded mode | Normal mode | Expanded mode |
| CH1 | Standard control | Heating-cooling control | Heating-cooling control | Heating-cooling control | Heating-cooling control |
| CH2 | Standard control | Heating-cooling control | Heating-cooling control | —*3 | Heating-cooling control*4 |
| CH3 | Standard control | —*3 | Heating-cooling control*4 | Standard control | Standard control |
| CH4 | Standard control | —*3 | Heating-cooling control*4 | Standard control | Standard control |

*3: Only temperature measurement using a temperature input terminal can be performed.

*4: Heating-cooling control is performed using an output module in the system.

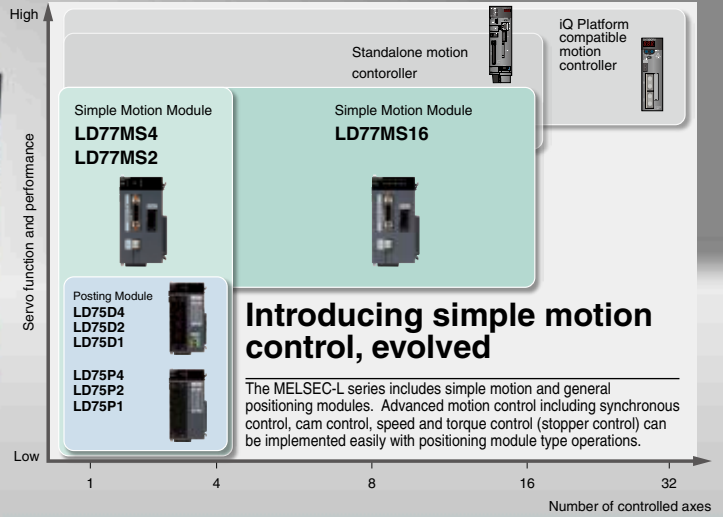

Simple Motion Modules

SSCNET III/H-compatible



LD77MS2

Number of control axes : 2 axes
Communication cycle : 150Mbps
Positioning data : 600 data/axis
Max. connection distance : 100m



LD77MS4

Number of control axes : 4 axes
Communication cycle : 150Mbps
Positioning data : 600 data/axis
Max. connection distance : 100m



LD77MS16

Number of control axes : 16 axes
Communication cycle : 150Mbps
Positioning data : 600 data/axis
Max. connection distance : 100m



*SSCNET(Servo System Controller NETWORK)

| Function | LD77MS2 | LD77MS4 | LD77MS16 |
|---|--------------------|------------|------------|
| Positioning control function | ● | ● | ● |
| Speed/torque control function | ● | ● | ● |
| Linear interpolation | 2 axes | 2/3/4 axes | 2/3/4 axes |
| Circular interpolation | 2 axes | 2 axes | 2 axes |
| Synchronous control function | External encoder | ● | ● |
| | Cam | ● | ● |
| | Phase compensation | ● | ● |
| Manual pulse generator operation function | ● | ● | ● |
| OPR control function | ● | ● | ● |

Positioning Modules

Open collector output



LD75P1

Number of control axes : 1 axis
Max. output pulses : 200K pulses/s
Positioning data : 600 data/axis
Max. connection distance : 2m



LD75P2

Number of control axes : 2 axis
Max. output pulses : 200K pulses/s
Positioning data : 600 data/axis
Max. connection distance : 2m



LD75P4

Number of control axes : 4 axis
Max. output pulses : 200K pulses/s
Positioning data : 600 data/axis
Max. connection distance : 2m

Differential output



LD75D1

Number of control axes : 1 axis
Max. output pulses : 4M pulse/s
Positioning data : 600 data/axis
Max. connection distance : 10m



LD75D2

Number of control axes : 2 axis
Max. output pulses : 4M pulse/s
Positioning data : 600 data/axis
Max. connection distance : 10m



LD75D4

Number of control axes : 4 axis
Max. output pulses : 4M pulse/s
Positioning data : 600 data/axis
Max. connection distance : 10m

| Function | LD75P1 | LD75P2 | LD75P4 | LD75D1 | LD75D2 | LD75D4 |
|------------------------------|-----------------------|--------|------------|---------------------|--------|------------|
| | Open collector output | | | Differential output | | |
| Positioning control function | ● | ● | ● | ● | ● | ● |
| Speed control function | ● | ● | ● | ● | ● | ● |
| Linear interpolation | — | 2 axes | 2/3/4 axes | — | 2 axes | 2/3/4 axes |
| Circular interpolation | — | 2 axes | 2 axes | — | 2 axes | 2 axes |
| OPR control function | ● | ● | ● | ● | ● | ● |


Countless applications are possible

LD77MS□

A variety of control types including positioning control, speed control, torque control, cam control and synchronous control can be implemented easily with simple parameter settings and a sequence program.


Positioning control

- Support for a multitude of applications thanks to a wide variety of control formats including linear interpolation control (up to 4 axes), 2-axis circular interpolation control, fixed feed control and continuous orbit control.
- Use a sequence program to set the positioning address, speed, etc. for easy automatic operation.
- Quickly implement powerful auxiliary functions such as step operation, target position change, M codes, and the skip function.

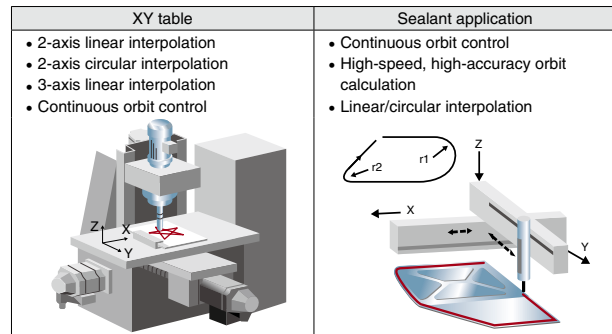

Speed control and torque control

- Tension control applications such as winding and rewinding are supported.
- Switch from positioning control, to speed and torque control, and back to positioning control. Because the present location is tracked even in speed and torque control mode, it is possible to maintain the current absolute position when returning to positioning control.


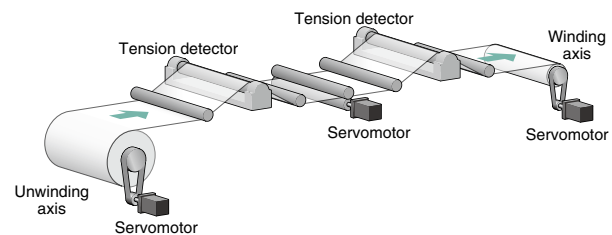


Cam control

- Cam control may be used alone or combined with synchronous control.

Example application for cam control:

To create a movement path around a workpiece using positioning control, axis 2 waits for axis 1 to complete the move from P1 to P2 before it begins moving from P2 to P3. By using cam control, axis 2 does not need to wait for axis 1 to complete its movement and the in position time can be shortened.

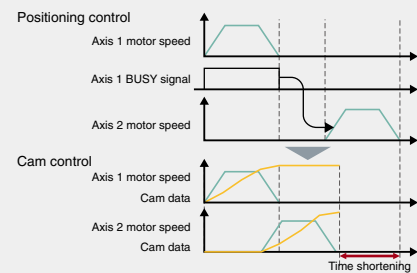


Many functions in a compact design

LD77MS□

Use a synchronous encoder with synchronous control

- Input pulses from a synchronous encoder can be used to perform synchronous control and cam control.
- The incremental synchronous encoder can be used by using the LD77MS built-in interface. An option unit is not required.
- To Further improve the synchronization accuracy, the phase compensation function, designed to compensate for synchronous encoder delays, can be used.

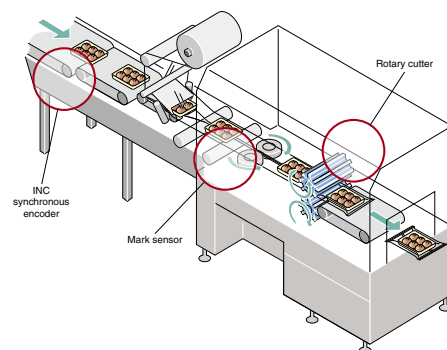


Standard mark detection function

- The built-in mark detection signal interface allows these units to be used in packaging systems for example, without additional option modules.

Automatic cam data generation for rotary cutter

- Complicated cam data for rotary cutters can be automatically generated just by specifying a few parameters like the sheet length and synchronization width.

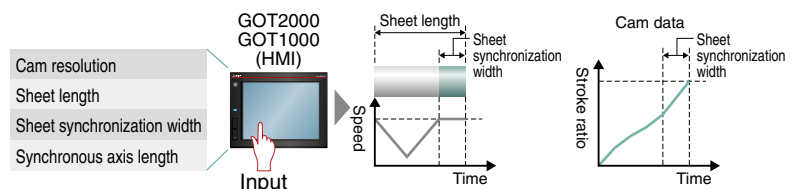


Perfect synchronous control is easy to achieve

LD77MS□

Replace mechanical gears, shafts, speed change gears, cams, etc. and generate synchronous control operations using software.

- Complicated programs are unnecessary for synchronous control because it can be implemented easily using parameter settings.
- Start and stop synchronous control for each axis. Use the synchronous control axis and positioning control axis together.
- Convey the travel value of main shaft to the output axis via the clutch.

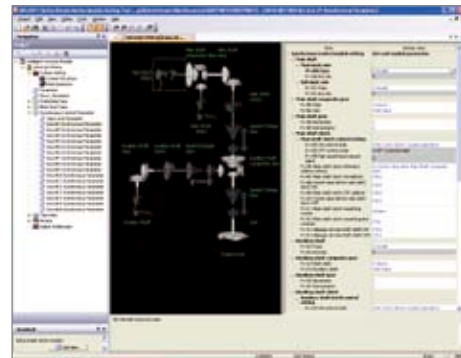


Synchronous Control Parameter Settings

Cam control made simple


LD77MS□

Create cam data patterns easily.

- Create cam profiles unrestricted by existing concepts of electronic cam control.
- Change the acceleration, speed, stroke, and jerk while simultaneously seeing how it effects the profile.
- Easily check created cam data by viewing them as thumbnails.
- Import and export cam data in CSV format.

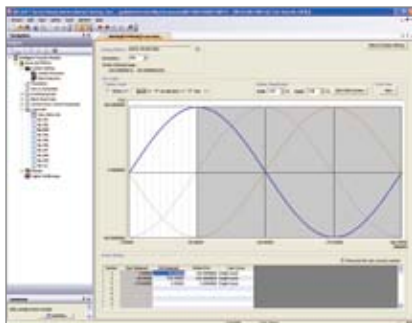

Cam Data

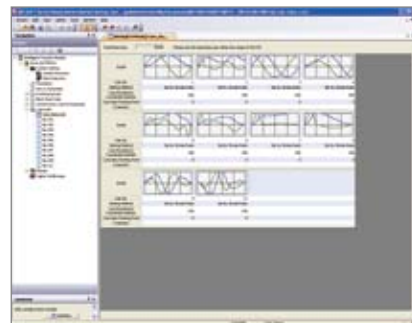


Cam Data List

Simplified debugging and commissioning

LD77MS□

Digital oscilloscope function

- Collection of data from the Simple Motion Module is synchronized with the operation cycle and waveform displays to facilitate an efficient start up.
- The assistant function explains each step.
- Use the purpose-based probe setting to easily set frequently-viewed data.
- Sample 16CH word and 16CH bit data and display 8CH words and 8CH bits in real time.

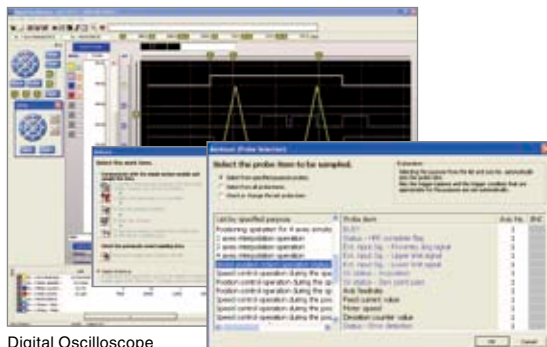

Digital Oscilloscope

Monitor and test functions

- Complete the system installation and perform operational checks easily using powerful monitor and test functions.
- Select items to be displayed on the monitor using a wealth of information monitoring options.
- The test function can be used to check basic operations without a sequence program.



Axis Monitor

Positioning Test

Specifications

| Item | | LD77MS2*1 | LD77MS4 | LD77MS16 | |
|--|--|--|--|--|--|
| Number of control axes | | 2 axes | 4 axes | 16 axes | |
| Operation cycle | | 0.88ms/1.77ms*2 | | | |
| Interpolation function | | Linear interpolation(2 axes), Circular interpolation(2 axes) | 2-axis/3-axis/4-axis linear interpolation, Circular interpolation(2 axes) | | |
| Control system | | PTP (Point To Point) control, path control (both linear and arc can be set), speed control, torque control, speed-position switching control, position-speed switching control | | | |
| Acceleration/deceleration process | | Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration | | | |
| Compensation function | | Backlash compensation, Electronic gear, Near pass function | | | |
| Synchronous control | | External encoder, Cam, Phase Compensation, Cam generated automatically | | | |
| Control unit | | mm, inch, degree, pulse | | | |
| Positioning data | | 600 data (positioning data No. 1 to 600)/ axis (Can be set with GX Works2 or programmable controller program.) | | | |
| Backup | | Parameters, positioning data, and block start data can be saved on flash ROM (battery-less backup) | | | |
| OPR control | Machine OPR control | Near-point dog method, Count method 1), Count method 2), Data set method, scale origin signal detection method | | | |
| | Fast OPR control | ● | | | |
| | Sub functions | OPR retry, OP shift | | | |
| Position control | Position control | Linear control | 1-axis linear control, 2-axis linear interpolation control, 3-axis linear interpolation control, 4-axis linear interpolation control*3 (Composite speed, Reference axis speed) | | |
| | | Fixed-feed control 2-axis circular interpolation control | 1-axis fixed-feed control, 2-axis fixed-feed control, 3-axis fixed-feed control, 4-axis fixed-feed control sub point designation, center point designation | | |
| | Speed control | 1-axis speed control, 2-axis speed control, 3-axis speed control, 4-axis speed control | | | |
| | Speed-position switching control | INC mode, ABS mode | | | |
| | Position-speed switching control | INC mode | | | |
| | Other control | Current value changing | Changing to a new current value using the positioning data , Changing to a new current value using the start No. | | |
| | | NOP instruction | ● | | |
| | | JUMP instruction | Unconditional JUMP, Conditional JUMP | | |
| | | LOOP,LEND | ● | | |
| High-level positioning control | | Block start, Condition start, Wait start, Simultaneous start, Repeated start | | | |
| Manual control | JOG operation | ● | | | |
| | Inching operation | ● | | | |
| | Manual pulse generator operation | Possible to connect 1 module (Incremental) Unit magnification (1 to 10000times) | | | |
| Expansion control | Speed-torque control | Speed control without positioning loops, Torque control without positioning loops | | | |
| Absolute position system | | Connect a battery to the servo amplifier to ensure compatibility | | | |
| Synchronous encoder interface | | Up to 4 channels (Total of the internal interface, interface via servo amplifier, and interface via the PLC CPU) | | | |
| Functions that limit control | Internal interface | 1 channel (Incremental) | | | |
| | Speed limit function | Speed limit value, JOG speed limit value | | | |
| | Torque limit function | Torque limit value_same setting, torque limit value_individual setting | | | |
| | Forced stop function | valid/invalid setting | | | |
| | Software stroke limit function Hardware stroke limit function | Movable range check with current feed value, movable range check with machine feed value ● | | | |
| Functions that change control details | Speed change function | ● | | | |
| | Override function | ● | | | |
| | Acceleration/deceleration time change function | ● | | | |
| | Torque change function | ● | | | |
| Other functions | Target position change function | Target position address and target position speed are changeable | | | |
| | M code output function | ● | | | |
| | Step function | Deceleration unit step, Data No. unit step | | | |
| | Skip function | Via sequence CPU, Via external command signal | | | |
| Mark detection function | Teaching function | ● | | | |
| | Mark detection | Mark detection mode (Continuous Detection mode, Specified Number of Detections mode, Ring Buffer mode) | | | |
| Optional data monitor function | Mark detection signal | 2 points | 4 points | 16 | |
| | Mark detection setting | 4 | 4 points/axis | 16 | |
| Master-slave operation function | | ● | | | |
| Amplifier-less operation function | | ● | | | |
| Digital oscilloscope function | | Bit data :8 channels, Word data: 4 channels | | Bit data: 16 channels, Word data: 16 channels*4 | |
| Starting time*5 | 1-axis linear control | | 0.88ms | | |
| | 1-axis speed control | | | | |
| | 2-axis linear interpolation control (Composite speed) | | | | |
| | 2-axis linear control (Reference axis speed) | | | | |
| | 2-axis circular interpolation control | | | | |
| | 2-axis speed control | | | | |
| | 3-axis linear interpolation control (Composite speed) | | | | |
| | 3-axis linear interpolation control (Reference axis speed) | | | | |
| | 3-axis speed control | | | | |
| | 4-axis linear interpolation control | | | | |
| 4-axis speed control | | | | | |
| Maximum distance between stations [m(ft.)] | | 100m | | | |
| Maximum number of modules specification | | Counts as 2 modules | | | |
| Number of occupied I/O points | | 32 points (I/O assignment: Intelligent 32 points) | | | |
| Servo amplifier connection system | | SSCNET III/H-compatible (1 system) | | | |
| 5V DC internal current consumption | | 0.55A | | 0.7A | |
| Weight | | 0.22kg | | | |

*1: The maximum number of control axes for LD77MS2 is two axes. Use LD77MS4 or LD77MS16 to control three or more axes.

*2: Default value is 1.77 ms. If necessary, check the operation time and change to 0.88 ms.

*3: 4-axis linear interpolation control is enabled only at the reference axis speed.

*4: 8CH word data and 8CH bit data can be displayed in real time.

*5: The starting time varies with conditions. For details, refer to the manual.

Specifications

| Item | | LD75P1/LD75D1 ¹⁾ | LD75P2/LD75D2 ¹⁾ | LD75P4/LD75D4 ¹⁾ | |
|---|--|---|--|---|--|
| Number of control axes | | 1 axis | 2 axes | 4 axes | |
| Interpolation function | | — | 2-axis linear interpolation 2-axis circular interpolation | 2-axis/3-axis/4-axis linear interpolation, 2-axis circular interpolation | |
| Control system | | PTP (Point To Point) control, path control (both linear and arc can be set), speed control, speed-position switching control, position-speed switching control | | | |
| Control unit | | mm, inch, degree, pulse | | | |
| Positioning data | | 600 data (positioning data No.1 to 600)/axis (Can be set with peripheral device or sequence program.) | | | |
| Backup | | Parameters, positioning data, and block start data can be saved on flash ROM (battery-less backup) | | | |
| Positioning control | Positioning control system | PTP ²⁾ control | Increment system, absolute system | | |
| | | Speed-position switching control | Increment system, absolute system ³⁾ | | |
| | | Position-speed switching control | Increment system | | |
| | | Path control | Increment system, absolute system | | |
| | Positioning control range | In absolute system | | -214748364.8 to 214748364.7 (μm) -21474.83648 to 21474.83647 (inch) 0 to 359.99999 (degree) -2147483648 to 2147483647 (pulse) | |
| | | | In increment system | -214748364.8 to 214748364.7 (μm) -21474.83648 to 21474.83647 (inch) -21474.83648 to 21474.83647 (degree) -2147483648 to 2147483647 (pulse) | |
| | | In speed-position switching control (INC mode)/ position-speed switching control | | 0 to 214748364.7 (μm) 0 to 21474.83647 (inch) 0 to 21474.83647 (degree) 0 to 2147483647 (pulse) | |
| | | | In speed-position switching control (ABS mode) ³⁾ | 0 to 359.99999 (degree) | |
| | Speed command | | 0.01 to 20000000.00 (mm/min) 0.001 to 2000000.000 (inch/min) 0.001 to 2000000.000 (degree/min) 1 to 4000000 (pulse/s) | | |
| | Acceleration/deceleration system selection | | Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration | | |
| Acceleration/deceleration time | | 1 to 8388608ms Four patterns can be set for each of acceleration time and deceleration time | | | |
| Sudden stop deceleration time | | 1 to 8388608ms | | | |
| OPR method | | 6 types | | | |
| Starting time ⁴⁾ | | | 1-axis linear control | 1.5ms | |
| | | | 1-axis speed control | 1.5ms | |
| | | | 2-axis linear interpolation control (Composite speed) | 1.5ms | |
| | | | 2-axis linear control (Reference axis speed) | 1.5ms | |
| | | | 2-axis circular interpolation control | 2.0ms | |
| | | | 2-axis speed control | 1.5ms | |
| | | | 3-axis linear interpolation control (Composite speed) | 1.7ms | |
| | | | 3-axis linear interpolation control (Reference axis speed) | 1.7ms | |
| | | | 3-axis speed control | 1.7ms | |
| | | | 4-axis linear interpolation control | 1.8ms | |
| | | 4-axis speed control | 1.8ms | | |
| Maximum output pulse | LD75P□ | 200kpulse/s | | | |
| | LD75D□ | 4Mpulse/s | | | |
| Maximum connection distance between drive units | LD75P□ | 2m | | | |
| | LD75D□ | 10m | | | |
| Maximum number of modules specification | | Counts as 2 modules | | | |
| Number of occupied I/O points | | 32 points (I/O assignment: Intelligent 32 points) | | | |
| External connections | | 40-pin connector | | 40-pin connector x2 | |
| 5V DC internal current consumption | LD75P□ | 0.44A | 0.48A | 0.55A | |
| | LD75D□ | 0.51A | 0.62A | 0.76A | |
| Weight | | 0.18kg | | | |


*1: LD75P□ refers to the open collector output type, and LD75D□ refers to the differential driver output type.

*2: The abbreviation for Point To Point, referring to position control.

*3: In speed-position switching control (ABS mode), "degree" is the only control unit available.

*4: Starting times may vary depending on conditions. For details, refer to the manual.

High-Speed Counter Modules

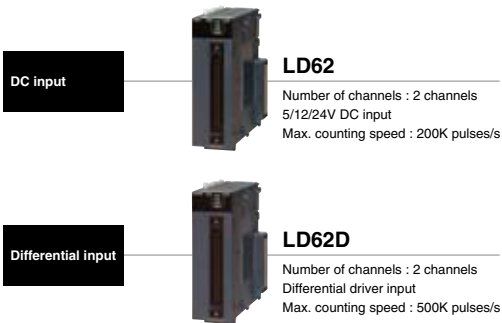

| Function | LD62 | LD62D |
|---------------------------------|----------|--------------------|
| | DC input | Differential input |
| Linear counter function | ● | ● |
| Ring counter function | ● | ● |
| Coincidence output function | ● | ● |
| Preset function | ● | ● |
| Disable count function | ● | ● |
| Latch counter function | ● | ● |
| Sampling counter function | ● | ● |
| Periodic pulse counter function | ● | ● |


Specifications

| Item | | LD62 [DC input] | LD62D [Differential input] | |
|--|--|--|--|---------------|
| Number of channels | | 2 channels | | |
| Counting speed switch setting | | 10K pulses/s, 100K pulses/s, 200K pulses/s | 10K pulses/s, 100K pulses/s, 200K pulses/s, 500K pulses/s | |
| Count input signal | Phase | 1-phase input (multiple of 1/2), CW/CCW, 2-phase input (multiple of 1/2/4) | | |
| | Signal level (A, B) | 5/12/24V DC 2 to 5mA | EIA Standard RS-422-A differential type line driver level (Equivalent with AM26LS31 (manufactured by Texas Instruments Japan Limited)) | |
| Counter | Maximum counting speed*1 | 200K pulses/s | 500K pulses/s | |
| | Counting range | -2147483648 to 2147483647 | | |
| | Type | UP/DOWN preset counter and ring counter functions | | |
| | Minimum count pulse width (Duty ratio 50%) | 10K pulses/s | 50μs | 10K pulses/s |
| | | 100K pulses/s | 5μs | 100K pulses/s |
| 200K pulses/s | | 2.5μs | 200K pulses/s | |
| Minimum phase differential for 2-phase input | 10K pulses/s | 25μs | 10K pulses/s | |
| | 100K pulses/s | 2.5μs | 100K pulses/s | |
| | 200K pulses/s | 1.25μs | 200K pulses/s | |
| Coincidence output | Comparison range | Binary with 32-bit code (-2147483648 to 2147483647) | | |
| | Comparison result | Set value < Count value Set value = Count value Set value > Count value | | |
| External input | Preset | 5/12/24V DC 2 to 5mA | | |
| | Function start | 5/12/24V DC 2 to 5mA (Differential type line drivers conforming to EIA standard RS-422-A are also applicable.) | | |
| External output | Minimum input response time | OFF to ON | Function start: 0.5ms | |
| | | ON to OFF | Function start: 1ms | |
| External output | Coincidence output | 2 points/channel | | |
| | Output voltage/current | 12 to 24V DC 0.5A | | |
| External output | Output response time | OFF to ON | 0.1ms or less (rated load, resistive load) | |
| | | ON to OFF | | |
| Maximum number of modules specification | | Counts as 1 module | | |
| Number of occupied I/O points | | 16 points (I/O assignment: Intelligent 16 points) | | |
| External connections | | 40-pin connector | | |
| 5V DC internal current consumption | | 0.31A | 0.36A | |
| Weight | | 0.13kg | | |

*1: The counting speed is affected by the rising/falling pulse speed. For details, refer to the corresponding manual.

Seamless integration of multiple networks

Today there is an increasing demand from automation fields for high speed control, effective management of data, flexible wiring, easy parameter settings, and predictive maintenance. To answer these demands, Mitsubishi Electric has teamed up with the CC-Link Partner Association to provide reliable, open-standards networks that operate seamlessly with one another. Together, these and other Mitsubishi networks allow for flexible integration at any automation network level. The latest addition to the CC-Link portfolio is IE Field; an Ethernet based gigabit network designed to provide cost-effective, reliable connectivity to field devices.

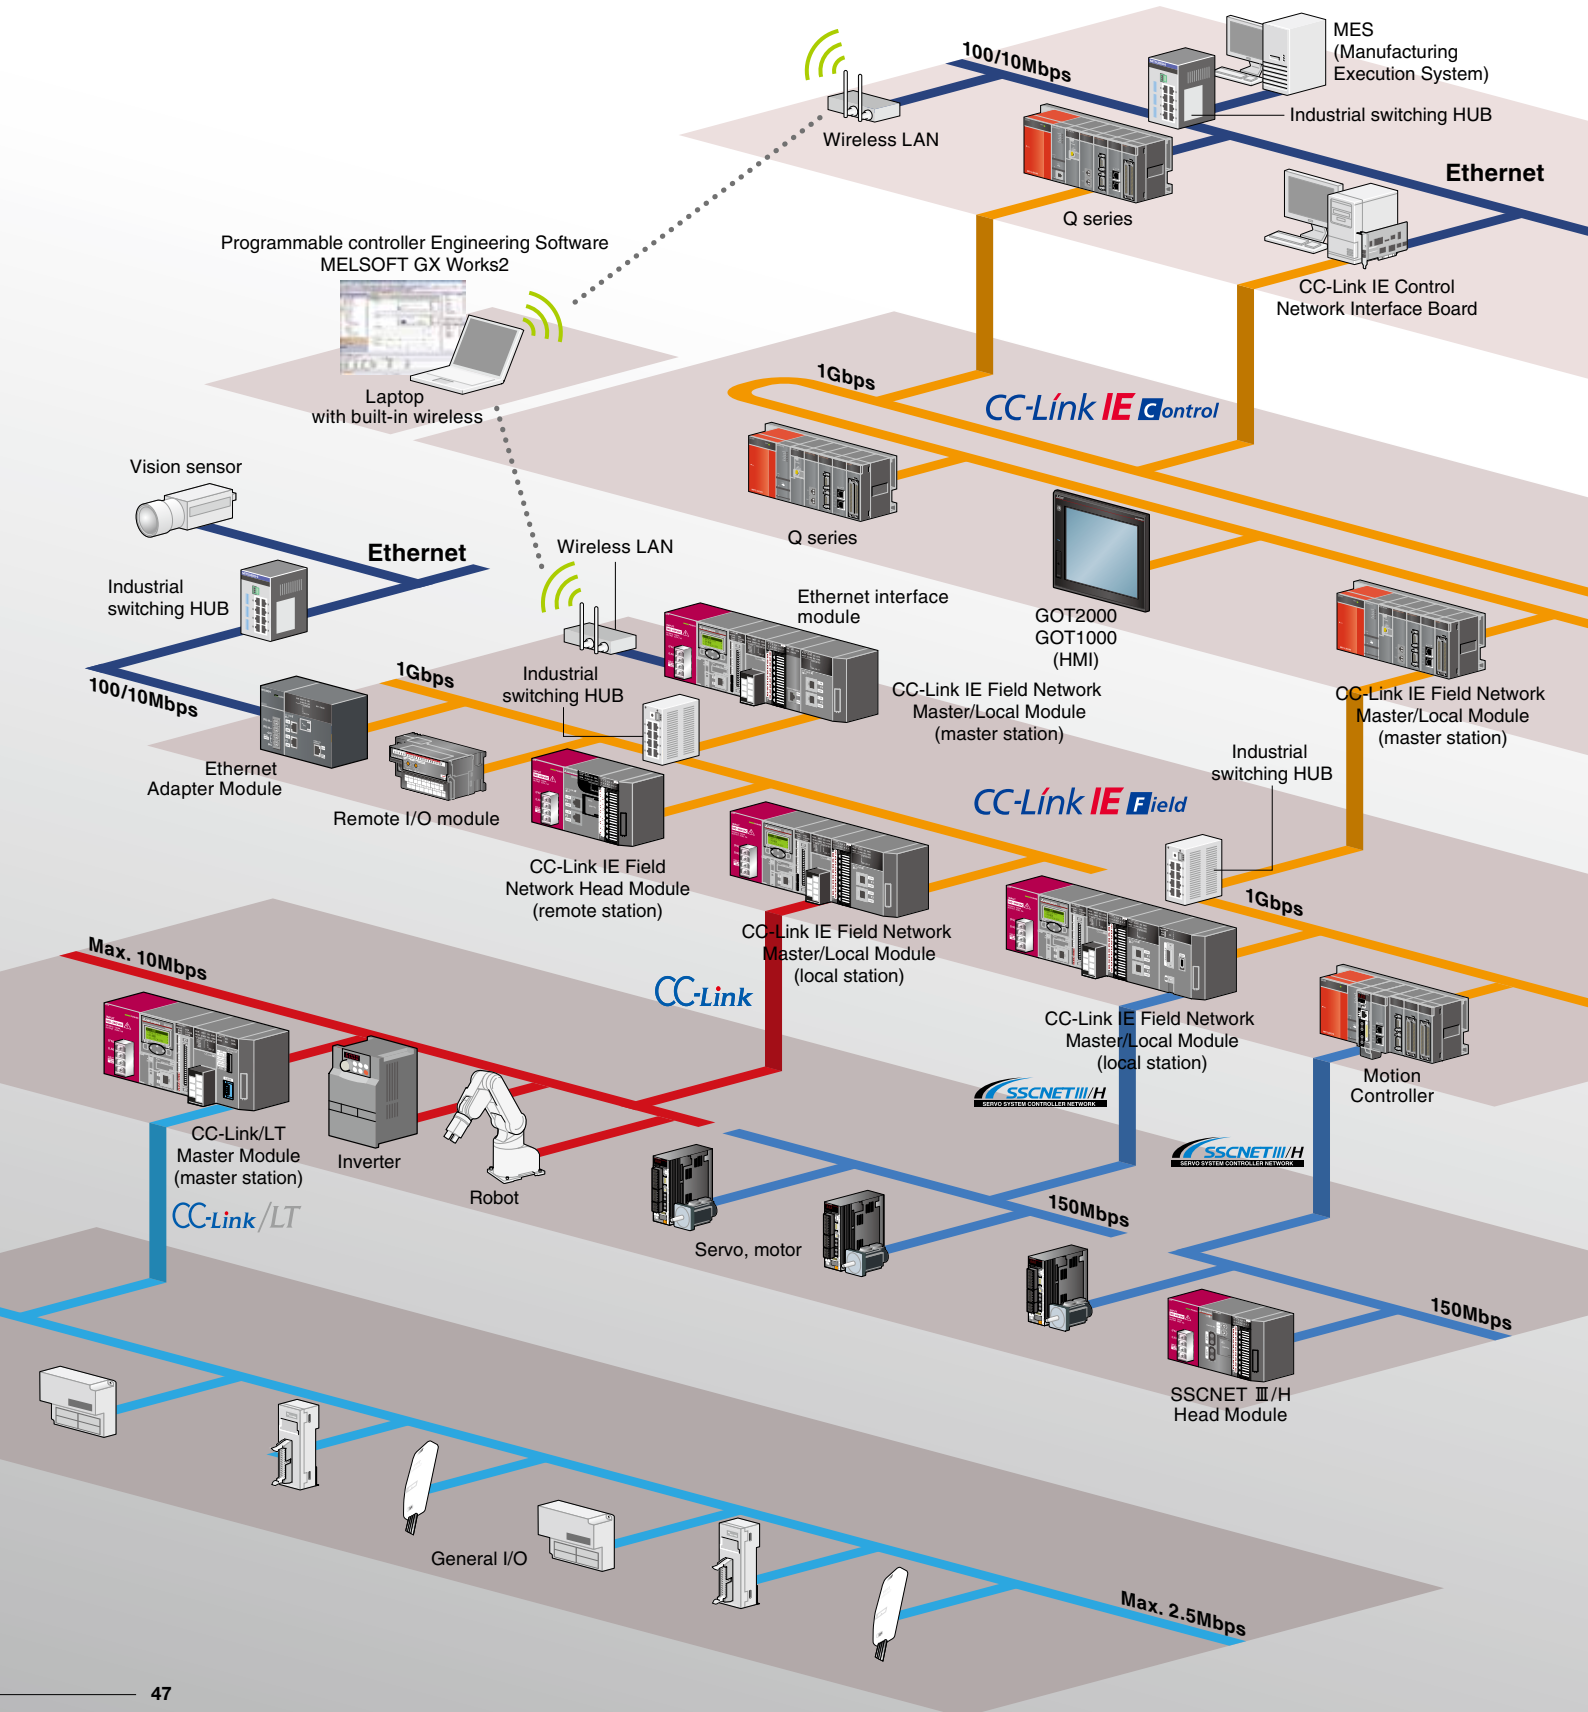


Seamless communication

Seamless data communication through Ethernet, CC-Link IE Control, CC-Link IE Field, and CC-Link networks allow easy access to information, no matter where it resides on the network. Through this technology, it is possible to “drill down” from the Enterprise or IT layer through multiple networks accessing programming controllers using GX Works2 programming or other related software.

In addition, many devices supporting SLMP*1 such as vision sensors and RFID controllers may be connected to the CC-Link IE Field Network.

*1: SLMP (SeamLess Message Protocol) is a protocol advocated by the CC-Link Partner Association.

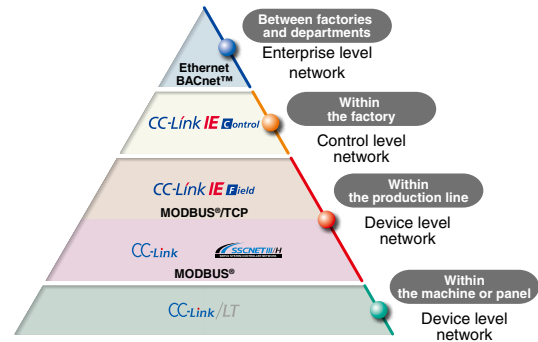

CC-Link IE Control

CC-Link IE Control is a high-reliability distributed control network designed to handle very large data communications (128 K word) over a high-speed (1Gbps) dual loop optical cable topology.

*: L series does not support the CC-Link IE Controller Network.

CC-Link IE Field

CC-Link IE Field is an all-round versatile gigabit Ethernet based network integrating controller, I/O control, safety control, and motion control in a flexible wiring topology supporting star, ring, and line configurations.

*: Compatible modules: LJ71GF11-T2, LJ72GF15-T2

CC-Link

CC-Link is a high-speed and high-reliable deterministic I/O control network which realizes reduced wiring whilst offering multi-vendor compatible products. This open field network is a global standard originating from Japan and Asia.

*: Compatible modules: L26CPU-BT, L26CPU-PBT, LJ61BT11

SSCNET III/H

SERVO SYSTEM CONTROLLER NETWORK

SSCNETIII/H is a dedicated high-speed, high-performance, and highly reliable servo system control network which offers flexible long distance wiring capabilities based on optical fiber cable topology.

*: Compatible modules: LD77MS2, LD77MS4, LD77MS16, LJ72MS15

CC-Link/LT

CC-Link/LT is a wire-saving sensor level network which is designed for use in panels between simple discrete devices. Its wiring system is based on reducing incorrect wiring and is based on CC-Link realizing high-speed and robust noise resistance features.

*: Compatible module: LJ61CL12

MODBUS®

L-series is now supporting the open FA MODBUS® protocol network, realizing easy communication, with various MODBUS® slave devices compatible with Ethernet MODBUS®/TCP or RS-232/422/485 serial communication.

*: Module supporting MODBUS®/TCP: L02CPU(-P), L06CPU(-P), L26CPU(-P), L26CPU(-P)BT, LJ71E71-100 (master only)
 *: Modules supporting MODBUS®: L6ADP(-R2/R4), LJ71C24(-R2) (master only)

BACnet™

This network supports the communication protocol standard BACnet™ client function. This network is mainly used to monitor and control air-conditioning, lighting and fire detection, etc. in building automation system applications.

*: Compatible modules: L02CPU(-P), L06CPU(-P), L26CPU(-P), L26CPU(-P)BT, LJ71E71-100 (client only)

| Network | Application | Enterprise level network | | Control level network | | Device level network | | Sensor level network |
|--------------------|-------------|---------------------------|--------------------------------|-----------------------|----------------|----------------------|---------|----------------------|
| | | Information communication | Controller distributed control | I/O control | Safety control | Motion control | Control | |
| Ethernet | | ● | | | | | | |
| CC-Link IE Control | | | ● | | | | | |
| CC-Link IE Field | | | ● | ● | ● | ● | | |
| CC-Link | | | | ● | | | | |
| CC-Link/LT | | | | | | | | ● |
| SSCNET III/H | | | | | | ● | | |
| BACnet™ | | ● | | | | | | |
| MODBUS®/TCP | | | ● | | | | | |
| MODBUS® | | | | ● | | | | |

L series Features

CPU

I/O

Analog/
Temperature Control

Simple Motion/
Positioning

High-Speed
Counter

Network

Software

Related Products


CC-Link IE Field Network Master/Local Module



Easy to configure settings

Network parameters are configured using the engineering tool, GX Works2. Only the master station needs to be configured, thereby greatly simplifying the network setup. Updating the system configuration is a breeze.

Master station settings are all that is required!

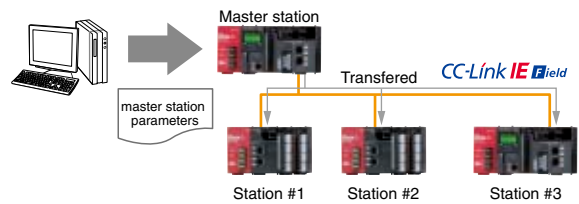


Flexible network topology

Various network topologies are supported including star, line, star and line combination, and ring. When hubs*1 are used, new equipment can be added and machine layouts can be changed easily.

*1: Hubs cannot be used in a ring configuration.

Examples of network topologies

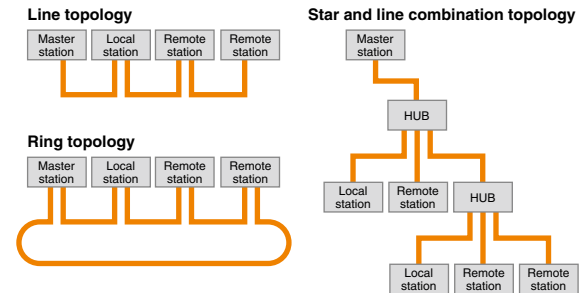

Specifications

| Item | | LJ71GF11-T2 | |
|--|-----------------------|---|--|
| Transmission speed | | 1Gbps | |
| Maximum overall cable distance (Maximum transmission distance) | Line topology | 12000m (when cables are connected to 1 master station and 120 slave stations) | |
| | Star topology | Depends on the system configuration | |
| | Ring topology | 12100m (when cables are connected to 1 master station and 120 slave stations) | |
| Maximum number of connected stations | Master station | 1 station (Up to 120 slave stations can be connected to the master station) | |
| | Local station | 120 stations | |
| Maximum link points per station | Remote register (RWw) | 8192 points, 16KB | |
| | Remote register (RWr) | 8192 points, 16KB | |
| | Remote input (RX) | 16384 points, 2KB | |
| | Remote output (RY) | 16384 points, 2KB | |
| Maximum link points per station | Master station | Remote register (RWw) | 8192 points, 16KB |
| | | Remote register (RWr) | 8192 points, 16KB |
| | | Remote input (RX) | 16384 points, 2KB |
| | | Remote output (RY) | 16384 points, 2KB |
| | Local station | Remote register (RWw) | 8192 points, 16KB (also including the send range of own station) |
| | | Remote register (RWr) | 8192 points, 16KB |
| | | Remote input (RX) | 16384 points, 2KB |
| | | Remote output (RY) | 16384 points, 2KB (also including the send range of own station) |
| Network topology | | Line topology, star topology (Coexistence of line topology and star topology is possible.), and ring topology | |
| Communication method | | Token passing method | |
| Communication port | | CC-Link IE Field Network port x 2 | |
| RAS function | | Automatic return, Slave station disconnection, Loopback function | |
| Connection cable*2 | | Ethernet cable of category 5e or higher (Double shielded cable) which satisfies 1000BASE-T standard | |
| Maximum number of modules specification | | Counts as 2 modules | |
| Number of occupied I/O points | | 32 points (I/O assignment: Intelligent 32 points) | |
| 5V DC internal current consumption | | 0.89A | |
| Weight | | 0.27kg | |

*2: Straight through cable

CC-Link IE Field Network Head Module

CC-Link IE Field



LJ72GF15-T2

CC-Link IE Field Intelligent device station

Communication speed : 1Gbps

Remote I/O: 2048 points

Remote register: 1024 words


RAS function

*: END cover is included.

CC-Link IE Field

CC-Link IE Field Network remote I/O station

L series I/O and intelligent function modules can be connected to the remote I/O head module without a dedicated CPU. There are many benefits to using intelligent device stations including reduced CPU and wiring costs, great flexibility in selecting I/O and intelligent function modules, and compact unit size.

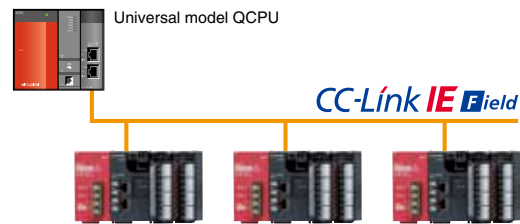


Modules compatible with the CC-Link IE Field Network head module

| Item | |
|----------------------------|--|
| I/O module | Input, Output, I/O Combined |
| Analog module | Analog input, Analog output, Analog input/output |
| Temperature Control module | |
| Simple Motion Module | |
| Positioning Module | |
| High-speed counter module | |
| Network module | CC-Link, CC-Link/LT, Serial communication |

RAS (Reliability, Availability, Serviceability) functions

One feature of RAS is to store all remote station error histories in the master station's latched memory. This preserves the error information in one place in the event of power loss and allows for easy troubleshooting. Other RAS features include network event logging, unit error logging, and testing and monitoring capabilities.

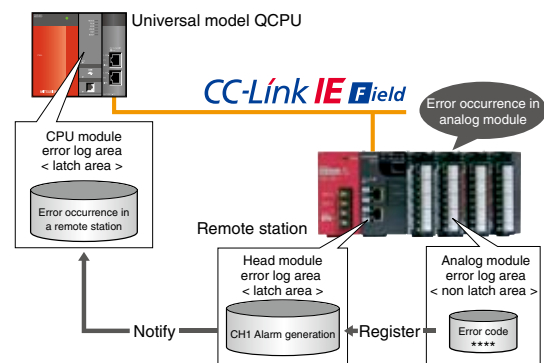

Specifications

| Item | LJ72GF15-T2 | |
|--|---|---|
| Transmission speed | 1Gbps | |
| Maximum overall cable distance (Maximum transmission distance) | Line network topology | 12000m (with 1 master and 120 slaves connected) |
| | Star network topology | Depends on the system configuration |
| | Ring network topology | 12100m (with 1 master and 120 slaves connected) |
| Transmission path | Line, star, line and star mixed, or ring topology | |
| Communication method | Deterministic (token passing) | |
| Maximum number of modules specification*1 | 10 | |
| Communication port | CC-Link IE Field Network port x 2 | |
| RAS function | Network event logging, unit error logging, testing, monitoring, and error history preservation function | |
| Connection cable*2 | Ethernet cable of category 5e or higher (Double shielded cable) which satisfies 1000BASE-T standard | |
| 5V DC internal current consumption | 1.00A | |
| Weight | 0.23kg | |

*1: The total number of modules that can be mounted to a CC-Link IE Field Network head module. (END cover and power supply module are not included.)

*2: Straight through cable

CC-Link Master/Local Module




LJ61BT11
 CC-Link Master/local station
 Max. communication speed : 10Mbps
 Remote I/O: 8192 points*1
 Remote register : 2048 words*1
 *1: Link points for CC-Link Ver.2.0 master station




Connect with a huge selection of device types using CC-Link

With such a large selection of CC-Link open network compatible devices, constructing a control system is easy.
 Even applications requiring vast amounts of data transmissions can be satisfied because CC-Link Ver.2.0 is supported.

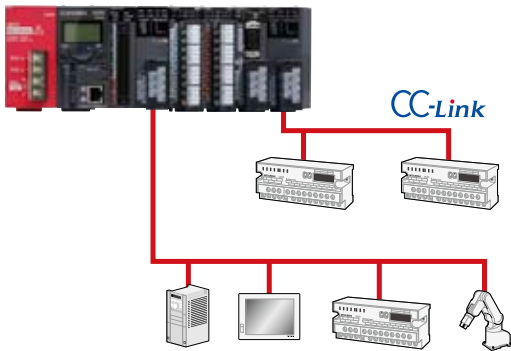

Local stations do not require transmission speed settings

Transmission speed auto-tracking function
 When used as a local station, no transmission speed setting is required; the setting is made through automatic detection of the master station setting.
 The current transmission speed in is indicated by an LED on the front surface of the module.

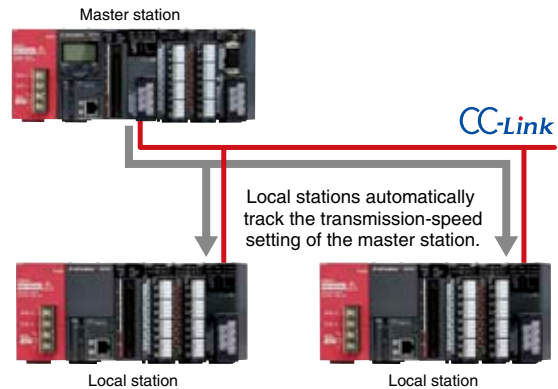

Specifications

| Item | LJ61BT11 | |
|--|--|---|
| Transmission speed | 156kbps/625kbps/2.5Mbps/5Mbps/10Mbps | |
| Maximum overall cable distance (Maximum transmission distance) | 1200m (without repeater, varies according to the transmission speed) | |
| Maximum number of connected stations (master station) | 64 | |
| Number of occupied stations (local station) | 1 to 4 stations (The number of stations can be switched using the GX Works2 parameter setting) | |
| Maximum number of link points per system*2 | Remote I/O (RX, RY) | 2048 points |
| | Remote register (RWw) | 256 points (master station → remote device station/local station/intelligent device station/standby master station) |
| | Remote register (RWr) | 256 points (remote device station/local station/intelligent device station/standby master station → master station) |
| Number of link points per station*2 | Remote I/O (RX, RY) | 32 points (local station is 30 points) |
| | Remote register (RWw) | 4 points (master station → remote device station/local station/intelligent device station/standby master station) |
| | Remote register (RWr) | 4 points (remote device station/local station/intelligent device station/standby master station → master station) |
| Communication method | Broadcast polling method | |
| Synchronous method | Frame synchronization method | |
| Encoding method | NRZI method | |
| Transmission path | Bus (RS-485) | |
| Transmission format | Conforms to HDLC | |
| Error control system | CRC (X ¹⁶ +X ¹² +X ⁶ +1) | |
| RAS function | Automatic return function | |
| | Slave station cut-off function | |
| | Error detection via link special relay/register | |
| Connection cable | CC-Link dedicated cables compatible with Ver. 1.10 | |
| Maximum number of modules specification | Counts as 1 module | |
| Number of occupied I/O points | 32 points (I/O assignment: Intelligent 32 points) | |
| 5V DC internal current consumption | 0.46A | |
| Weight | 0.15kg | |

*2: Indicates the number of link points for Remote net Ver.1 mode.

CC-Link/LT Master Module




LJ61CL12
 CC-Link/LT Master station
 Max. communication speed : 2.5Mbps
 Remote I/O : 1024 points*1
 *1: When in 16-point mode



High speed equipment response

CC-Link/LT has an excellent response time. With 64 stations and a transmission speed of 2.5Mbps, the maximum link scan time is just 1.2ms. According to the transmission distance required, it is possible to select speeds of 2.5Mbps, 625kbps, or 156kbps.

■ CC-Link/LT link scan time (using a transmission speed of 2.5Mbps)

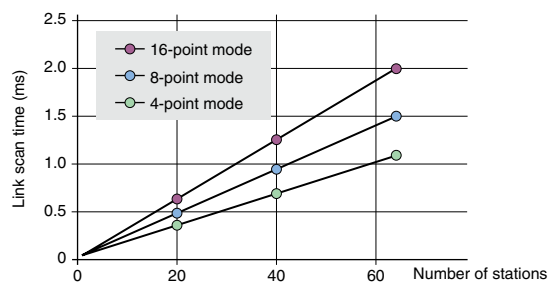

Simple networking that 'just works'

There are no confusing parameters settings to make, and with remote I/O, only the master station needs to set the transmission speed.

Specifications

| Item | | LJ61CL12 | | | |
|---|--|--|--------------------------|---------------------------|------------|
| Point mode | | 4-point mode | 8-point mode | 16-point mode | |
| Control specifications | Maximum link points (the same I/O address used) | 256 points (512 points) | 512 points (1024 points) | 1024 points (2048 points) | |
| | Link points per station (the same I/O address used) | 4 points (8 points) | 8 points (16 points) | 16 points (32 points) | |
| | Link scan time | 32 stations connected | Points | 128 points | 256 points |
| | | | 2.5Mbps | 0.7ms | 0.8ms |
| | | | 625kbps | 2.2ms | 2.7ms |
| | Link scan time | 64 stations connected | 156kbps | 8.0ms | 10.0ms |
| | | | Points | 256 points | 512 points |
| | | | 2.5Mbps | 1.2ms | 1.5ms |
| Link scan time | 64 stations connected | 625kbps | 4.3ms | 5.4ms | |
| | | 156kbps | 15.6ms | 20.0ms | |
| | | | | 27.8ms | |
| Communication specifications | Transmission speed | 2.5Mbps/625kbps/156kbps | | | |
| | Communication method | BITR method (Broadcastpolling + Interval Timed Response) | | | |
| | Network topology | T-branch type | | | |
| | Error control system | CRC | | | |
| | Number of connectable modules | 64 | | | |
| | Remote station number | 1 to 64 | | | |
| | Installation position of master station | End of a trunk line | | | |
| | RAS function | Network diagnostics, internal loopback diagnostics, slave station cutoff function, automatic return function | | | |
| Connection cable*2 | Dedicated flat cable (0.75mm ² × 4)*3, VCTF cable*4, flexible cable*3 | | | | |
| Maximum number of modules specification | Counts as 1 module | | | | |
| Number of occupied I/O points*5 | 16, 32, 48, 64, 128, 256, 512, or 1024 points (I/O assignment: Intelli.) | | | | |
| 5V DC internal current consumption | 0.16A | | | | |
| 24V DC power supply*6 | Voltage | 20.4 to 28.8V DC | | | |
| | Current consumption | 0.03A | | | |
| | Current on startup | 0.07A | | | |
| Weight | 0.12kg | | | | |

*2: When the cables other than dedicated flat cables, VCTF cables, and flexible cables are used, performance of CCLink/LT is not guaranteed.
 *3: Use the dedicated flat cables and flexible cables accredited by CC-Link Partner Association. CC-Link Partner Association website: <http://www.cc-link.org/>
 *4: Refer to the manual for details regarding VCTF cable specifications.
 *5: Set the number of occupied I/O points using the operation setting switch. Refer to the manual for details.
 *6: 24V DC power supply is supplied through the dedicated power supply or power supply adapter.

SSCNET III/H Head Module




SSCNET III/H remote station

The SSCNET III/H head module is used to connect the MELSEC-L Series I/O and intelligent function modules to the SSCNET III/H network.

Functioning as the motion controller's remote station, flexible system configuration can be achieved while realizing reduced system wiring and a smaller footprint.

In addition, modules installed on the SSCNET III/H head module can be used as a motion controller input/output using cyclic transmission.

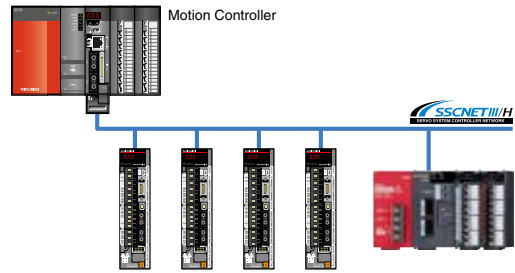

■ SSCNET III/H Head Module compatible modules

| Product | |
|----------------------------|--|
| I/O module | Input, Output, I/O Combined |
| Analog module | Analog input, Analog output, Analog I/O combined |
| High-Speed Counter Modules | |

■ Compatible motion controller

| Category | Model |
|------------------------------|-----------|
| Motion CPU | Q172DSCPU |
| | Q173DSCPU |
| Standalone motion controller | Q170MSCPU |

■ Specifications

| Item | LJ72MS15 | |
|--|---|-----------|
| Maximum link points per network | RWr,RX | 256 bytes |
| | RWw,RY | 256 bytes |
| Maximum link points per station | RWr,RX | 64 bytes |
| | RWw,RY | 64 bytes |
| Communication speed | 150Mbps | |
| Maximum connectable stations per network*1 | Communication cycle: 888μs | 4 |
| | Communication cycle: 444μs | 2 |
| | Communication cycle: 222μs | 1 |
| Maximum station-to-station distance | POF type: 20m, H-PCF type: 50m | |
| Connection method | Daisy chain connection (Regenerative relay system with a servo amplifier) | |
| Synchronous method | Synchronization of the control cycle and communication cycle that synchronize with the data transmission of the Motion controller | |
| Communication cycle | 222μs/444μs/888μs | |
| Maximum number of modules specification*2 | 10 | |
| Communication port | SSCNET III/H port 2x | |
| Connection cable | SSCNET III cable (optical fiber cable) | |
| 5V DC internal current consumption | 0.55A | |
| Weight | 0.20kg | |

*1: This number includes only head modules. Servo amplifiers are not included.

*2: Total number of occupied modules that can be mounted on SSCNET III/H head module. (Does not include in END cover or power supply module.)

Ethernet Interface Module




BACnet™
MODBUS®/TCP

Modify/collect CPU data from other devices

SLMP (MC protocol) communication *1

SLMP (Seamless Message Protocol) realizes seamless communication across devices on Ethernet that support the SLMP protocol.

*1: This function can be used with modules with first five serial number digits are "15042" or later.

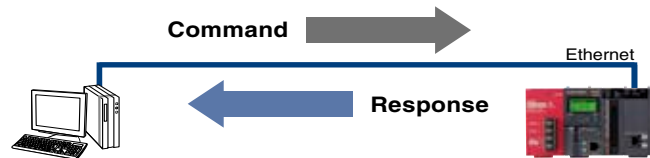

MELSOFT connection


The MELSOFT connection feature realizes the connection to various MELSOFT products including the GX Works2 programming tool. In addition, by using together with the MX Component communication support tool (optional product), custom communications programs can be created, without having to consider any dedicated protocol (send/receive procedure).

Easily connect to BACnet™ and MODBUS®/TCP

Predefined Protocol support function

Use the GX Works2 Predefined Protocol support function to easily set the required protocol for communicating with other devices.

- ▶ Selecting from the communication protocol library
Easily communicate with target devices by selecting a prepared protocol. The communication protocol library supports the SLMP, MODBUS®/TCP and BACnet™ client functions.
- ▶ Randomly preparing and editing a protocol

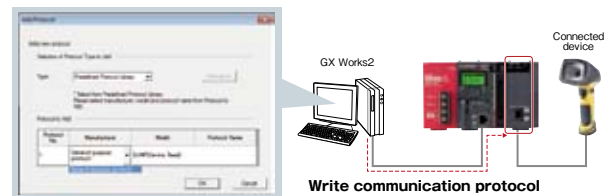

By creating a random protocol with the predefined protocol support function, data can be exchanged with a protocol that matches the target device.

Specifications

| Item | | LJ71E71-100 | |
|---|---|--|--|
| Standard | | 100BASE-TX | 10BASE-T |
| Transmission specifications | Data transmission speed | 100Mbps | 10Mbps |
| | Interface | RJ45 (AUTO MDI/MDI-X) | |
| | Communication mode | Full duplex/Half duplex | Half duplex |
| | Transmission method | Base band | |
| | Maximum segment length | 100m (length between a hub and node)*2 | |
| Sending/receiving data storage memory | Maximum number of cascade connections | Cascade connection (maximum of 2 levels)*3 | Cascade connection (maximum of 4 levels)*3 |
| | Number of simultaneous open connections | 16 connections (Connections usable on a program) | |
| | Fixed buffer | 1K word × 16 | |
| E-mail | Random access buffer | 6K words × 1 | |
| | Attachment | 6K words × 1 | |
| | | Main text | 960 words × 1 |
| Maximum number of modules specification | Counts as 1 module | | |
| Number of occupied I/O points | 32 points (I/O assignment: Intelligent 32 points) | | |
| 5V DC internal current consumption | 0.60A | | |
| Weight | 0.18kg | | |

*2: For the maximum segment length (a length between hubs), consult with the manufacturer of the switching hub used.

*3: This applies when a repeater hub is used. For the number of levels that can be constructed when a switching hub is used, consult with the manufacturer of the switching hub used.

Serial Communication Modules

RS-232
RS-422/485



LJ71C24

Max. communication speed : 230.4kbps^{*1}
MC protocol communications
Predefined protocol support function
^{*1}: Available for only channel 1

MODBUS®

RS-232




LJ71C24-R2

Max. communication speed : 230.4kbps^{*1}
MC protocol communications
Predefined protocol support function
^{*1}: Available for only channel 1

MODBUS®


Quick connection using predefined protocols

The predefined protocol enables easy setup of protocols to communicate with external devices using GX Works2. Connections are quickly setup by selecting the target device from the communications protocol library.

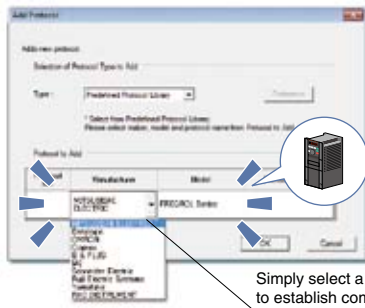

Easy to create/edit of predefined protocols

Easily create or edit predefined protocols from within the communications library. Even if the target device protocol is not listed, it can be added easily to the existing library.

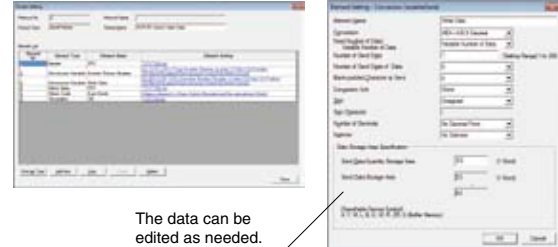

Specifications

| Item | | LJ71C24 | LJ71C24-R2 | | | | | | | | | | | | | | | | | | |
|--|--|---|------------------------------------|--|--------|------------|-------------------------|---------|----------|---------------|---------|----------|-------------------|---------|----------|----------------------------|---------|---------|-----------------|---------|---------|
| Interface | CH 1 | RS-232 compliant (D-Sub 9P female) | RS-232 compliant (D-Sub 9P female) | | | | | | | | | | | | | | | | | | |
| | CH 2 | RS-422/485 compliant (2-piece terminal block) | RS-232 compliant (D-Sub 9P female) | | | | | | | | | | | | | | | | | | |
| Communication system | Line | Full-duplex/half-duplex communications | | | | | | | | | | | | | | | | | | | |
| | MC protocol | Half-duplex communications | | | | | | | | | | | | | | | | | | | |
| | Predefined protocol | Full-duplex/half-duplex communications | | | | | | | | | | | | | | | | | | | |
| | Nonprocedural protocol | Full-duplex/half-duplex communications | | | | | | | | | | | | | | | | | | | |
| Synchronization method | | Start-stop synchronization method | | | | | | | | | | | | | | | | | | | |
| Transmission speed | | 50bps/300bps/600bps/1200bps/2400bps/4800bps/9600bps/14.4kbps/ 19.2kbps/28.8kbps/38.4kbps/57.6kbps/115.2kbps/230.4kbps Transmission speed 230.4kbps is only available for channel 1. Total transmission speed of two interfaces is available up to 230.4kbps. Total transmission speed of two interfaces is available up to 115.2kbps when the communication data monitoring function is used. | | | | | | | | | | | | | | | | | | | |
| Data format | Start bits | 1 | | | | | | | | | | | | | | | | | | | |
| | Data bits | 7 or 8 | | | | | | | | | | | | | | | | | | | |
| | Parity bits | 1 (vertical parity) or none | | | | | | | | | | | | | | | | | | | |
| | Stop bits | 1 or 2 | | | | | | | | | | | | | | | | | | | |
| Error detection | Parity check | All protocols and when ODD/EVEN is selected by parameter. | | | | | | | | | | | | | | | | | | | |
| | Sum check code | MC protocol/bidirectional protocol selected by parameter. For the predefined protocol, whether or not a sum check code is needed depends on the selected protocol. Nonprocedural protocol selected by user frame. | | | | | | | | | | | | | | | | | | | |
| Transmission control | <table border="1"> <thead> <tr> <th></th> <th>RS-232</th> <th>RS-422/485</th> </tr> </thead> <tbody> <tr> <td>DTR/DSR (ER/DR) control</td> <td>Enabled</td> <td>Disabled</td> </tr> <tr> <td>RS/CS control</td> <td>Enabled</td> <td>Disabled</td> </tr> <tr> <td>CD signal control</td> <td>Enabled</td> <td>Disabled</td> </tr> <tr> <td>DC1/DC3 (Xon/Xoff) control</td> <td>Enabled</td> <td>Enabled</td> </tr> <tr> <td>DC2/DC4 control</td> <td>Enabled</td> <td>Enabled</td> </tr> </tbody> </table> | | | | RS-232 | RS-422/485 | DTR/DSR (ER/DR) control | Enabled | Disabled | RS/CS control | Enabled | Disabled | CD signal control | Enabled | Disabled | DC1/DC3 (Xon/Xoff) control | Enabled | Enabled | DC2/DC4 control | Enabled | Enabled |
| | | RS-232 | RS-422/485 | | | | | | | | | | | | | | | | | | |
| | DTR/DSR (ER/DR) control | Enabled | Disabled | | | | | | | | | | | | | | | | | | |
| | RS/CS control | Enabled | Disabled | | | | | | | | | | | | | | | | | | |
| | CD signal control | Enabled | Disabled | | | | | | | | | | | | | | | | | | |
| DC1/DC3 (Xon/Xoff) control | Enabled | Enabled | | | | | | | | | | | | | | | | | | | |
| DC2/DC4 control | Enabled | Enabled | | | | | | | | | | | | | | | | | | | |
| • DTR/DSR signal control and DC code control are selected by the user. | | | | | | | | | | | | | | | | | | | | | |
| Maximum number of modules specification | Counts as 1 module | | | | | | | | | | | | | | | | | | | | |
| Number of occupied I/O points | 32 points (I/O assignment: Intelligent 32 points) | | | | | | | | | | | | | | | | | | | | |
| 5V DC internal current consumption | 0.39A | 0.26A | | | | | | | | | | | | | | | | | | | |
| Weight | 0.17kg | 0.14kg | | | | | | | | | | | | | | | | | | | |

Ethernet and CC-Link IE Field related products

Wireless LAN Adapter Ethernet

NZ2WL-US (U.S.A)^{*1*2}, NZ2WL-EU (Europe)^{*1*2}, NZ2WL-CN (China)^{*1*2}, NZ2WL-KR (Korea)^{*1*2}, NZ2WL-TW (Taiwan)^{*1*2}

Features

- Wireless LAN (Ethernet) in the factory provides flexibility in installing new line or alteration layouts. Wireless saves your wiring costs.
- Simply installing wireless LAN adapters makes existing FA equipment wireless.
- Compatible with the latest security standards of WPA2/WPA. The security prevents unauthorized access from outside.

*1: Each product can be used only in the respective countries.

*2: Supported both Access point and Station. They can be used by changing the setting.

The wireless LAN adapters were developed and are produced with CONTEC Co., Ltd. Please note that the general specifications and guarantee conditions of these products are different from those of programmable controllers (such as MELSEC series) and CONTEC products. Refer to the manual for details on the product.



L series Features

CPU

I/O

Analog/
Temperature Control

Simple Motion/
Positioning

High-Speed
Counter

Network

Software

Related Products

Industrial Switching HUB CC-Link IE Field Ethernet

NZ2EHG-T8 / NZ2EHF-T8^{*3}

Features

- NZ2EHG-T8 is compatible with transmission rates of 10 Mbps, 100 Mbps, and 1 Gbps.
- NZ2EHF-T8 is compatible with transmission rates of 10 Mbps and 100 Mbps.
- These switching hubs comply with IEEE802.3ab (1000 BASE-T), IEEE802.3u (100 BASE-TX), IEEE802.3 (10 BASE-T) standards.
- AutoMDI/MDI-X and auto-negotiation are available.
- The automatic power adjustment function can reduce power consumption by up to 80 percent.^{*4}
- These hubs do not use cooling fans, and yet a wide ambient-temperature operating range is permissible (0 to 50°C).
- Quick detach mechanism allows easy DIN rail attachment and detachment.

*3: This model may not be connected directly to the CC-Link IE Field Network (1 Gbps). An Ethernet adapter module NZ2GF-ETB is required. For direct use with the CC-Link IE Field Network, please use NZ2EHG-T8.

*4: For comparison, power consumption was measured when all 8 ports were used and when none of them were used. This function is only available for NZ2EHG-T8.

This series was developed and is produced with Contec Co. Ltd. Please note that the specifications and guarantee conditions of these products are different from those of MELSEC products. Please refer to the product manual for details.



1Gbps

100Mbps

CC-Link IE Field Network Ethernet Adapter Module CC-Link IE Field Ethernet

NZ2GF-ETB

Features

- Using Seamless Message Protocol (SLMP⁵), a variety of Ethernet devices such as vision sensors and RFID controllers can be connected to the CC-Link IE Field Network.
- Use a web browser to set station numbers, Ethernet options, and view error history.
- This Ethernet adapter module is compatible with transmission rates of 100 Mbps and 1 Gbps.

*5: SLMP (Seamless Message Protocol) is a protocol advocated by the CC-Link Partner Association.




Increase productivity and lower the total cost of ownership.

Introducing the next generation of IA programming software:

GX Works2

GX Works2 focuses on driving down total cost by including features that speed up commissioning, reduce downtime, improve programming productivity, and provide strong security.

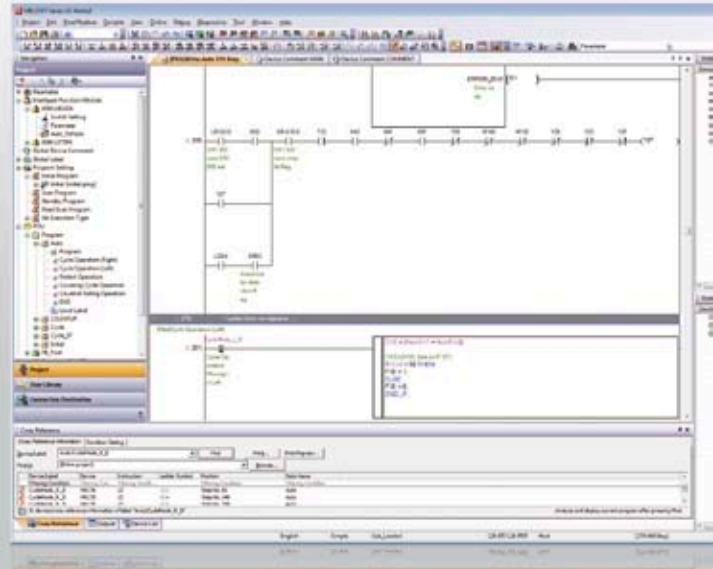

User interface that is "easy to use" by design

The programming tool GX Works2 has been developed from the ground up to be intuitive for all users and allow anyone to begin programming easily. The user interface and other functions provide a comfortable programming environment that enables improvements in design efficiency.

Fully integrated intelligent function module management tools.

Use tabs to easily switch between programs, parameters, and other screens.

Improve readability by hiding ladder rungs not relevant to the current operation.

Use "Watch windows" to conveniently monitor pertinent values.

Project tree gives compressive look at flow of information in program and structure.

Program titles help to identify the content of each program.


Cross reference devices and labels with ease.

Use the Inline-ST*1 feature to quickly write complex expressions in ladder programs.

*1: In-line ST can be only be created in projects that use labels.

Easily create circuits with few key inputs



The program can be easily modified using the keyboard shortcut [Alt] + [←] / [→] or [Alt] + [↑] / [↓] keys.




■ Editing the circuit
[Alt]+[→] ... MOV→D0→K4Y0
[Alt]+[←] ... K4Y0→D0→MOV



■ Changing the device No.
[Alt]+[↑] ... K4Y0→K4Y1→K4Y2
[Alt]+[↓] ... K4Y2→K4Y1→K4Y0

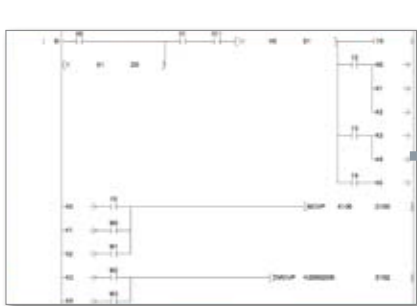

Easy-to-read display

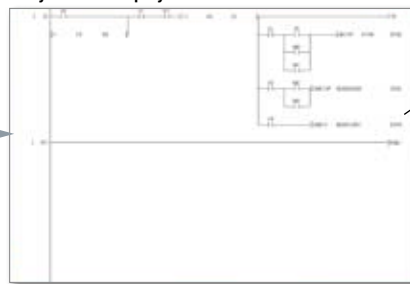

The number of contacts on one line can be changed to 9, 11, 13, 17 or 21 contacts.


The circuit line doesn't wrap, easier to read.

Click the Undo button.




Undo

Use Undo ([Ctrl] + [z]) to go back to up to 30 previous input steps.




The device number is automatically incremented when repeatedly pasting a cut/copied ladder rung.

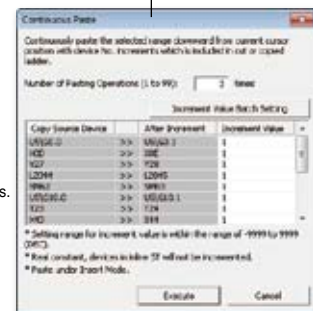

Efficiently edit lines with keyboard


Ladder rungs can be easily modified just by using the various keyboard shortcut keys, eliminating the need to switch to editing mode.

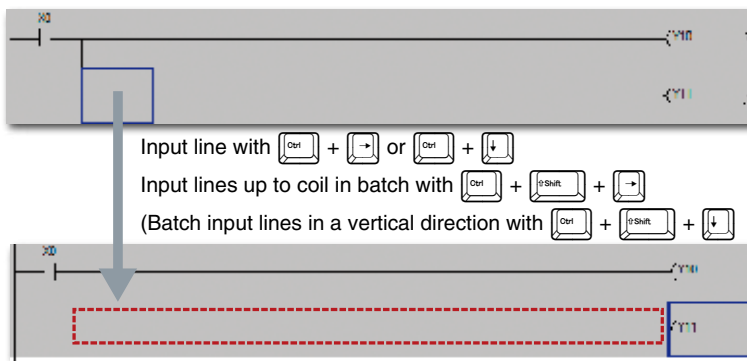

■ How to input a line
Press [Ctrl] + [→] or [Ctrl] + [↓] at an empty spot.
Press [Ctrl] + [←] or [Ctrl] + [↑] on top of a line to delete it.


Use function blocks for common operations

Function blocks allow selections of commonly used code to be easily reused and shared among projects. Shared or created function blocks can be added to a program using simple drag and drop operation. Using function blocks effectively results in faster development times with fewer programming mistakes.

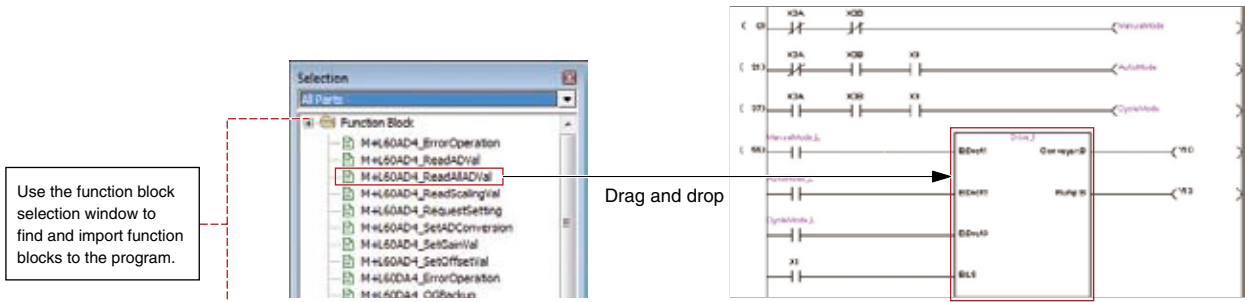


Use sample comments to eliminate the need to input comments

Sample comments are provided for the CPU's special relays/registers and the intelligent function module's buffer memory/XY signals. These can be copied into the project's comments thus greatly reducing the time required for entering device comments.

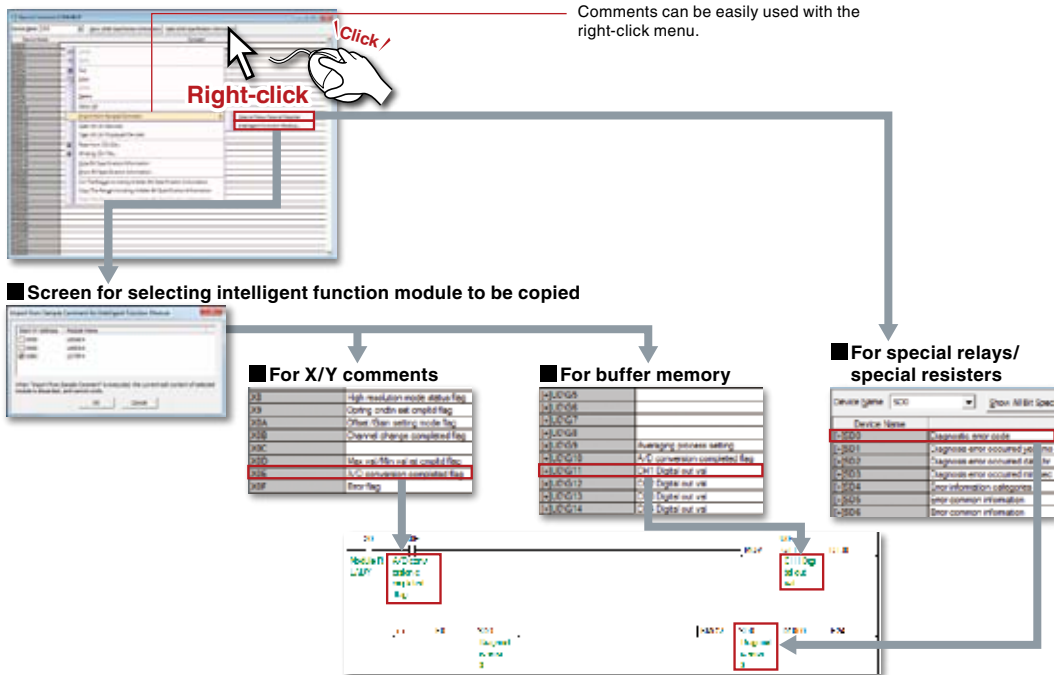


Quickly identify similar devices

Word device comments can be registered per bit with the contents displayed directly on the ladder rung.

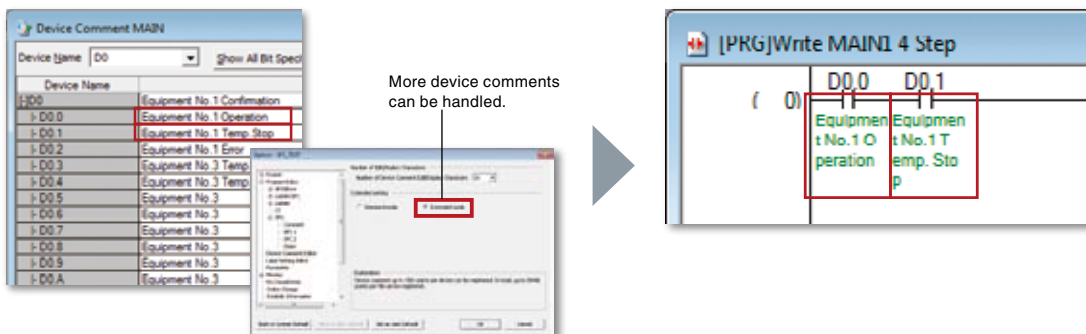

Cross referencing interlinked with circuit displays


Relevant devices and labels can be searched within the contents of the program by using the cross reference tool. The results are immediately displayed in the cross reference dialog box conveniently besides the actual program view screen. It is then very easy to check where the relevant device is actually used within the program, just by double clicking on the target device.

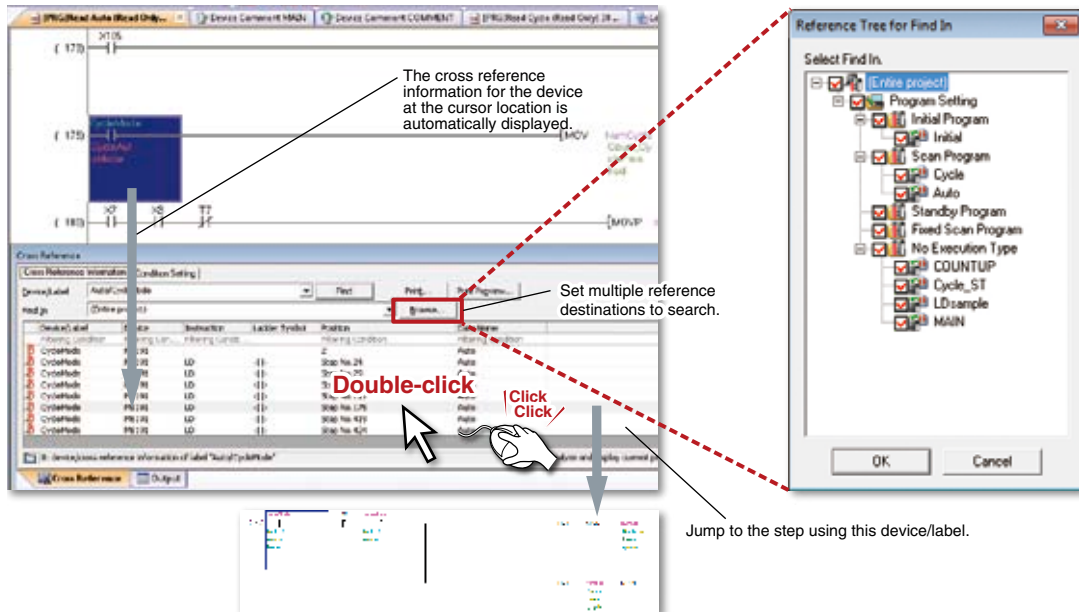

Offline debug without physical hardware


GX Simulator
Function

The simulation function is now integrated. The program can be executed in a step-by-step method, finding program errors more easily.

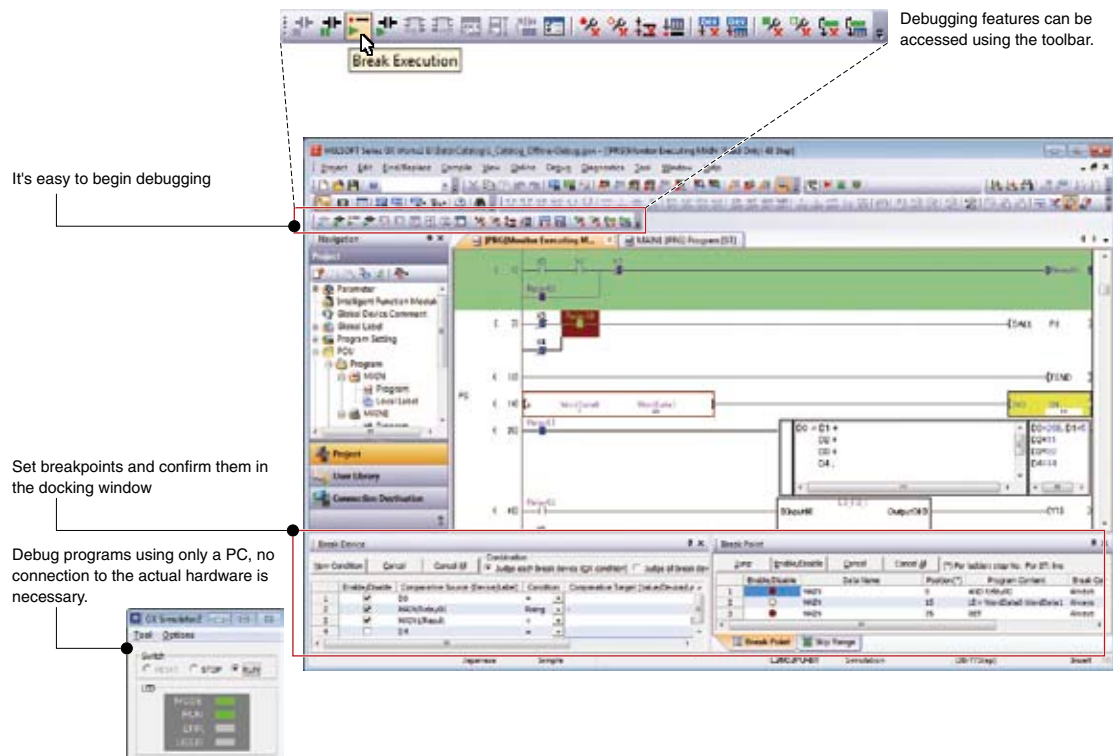


Integrating the intelligent function module setting tool (GX Configurator)

The intelligent function module's setting functions have been unified with GX Works2. Manage the intelligent function module's setting with a GX Works2 project.

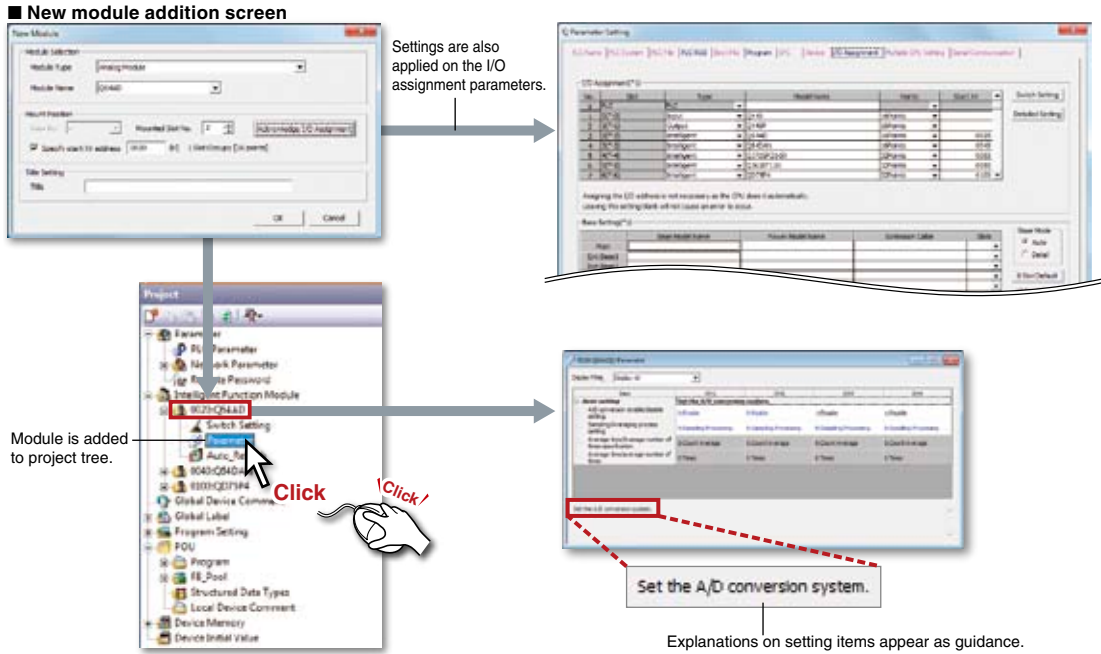


Advanced PLC diagnostics

The diagnostics screen provides a wealth of information about the currently connected controller. The main screen allows the operational status of the entire programmable controller to be seen at a glance, allowing the immediate identification of problems. Additional detailed information is available to help with routine maintenance and problem resolution.

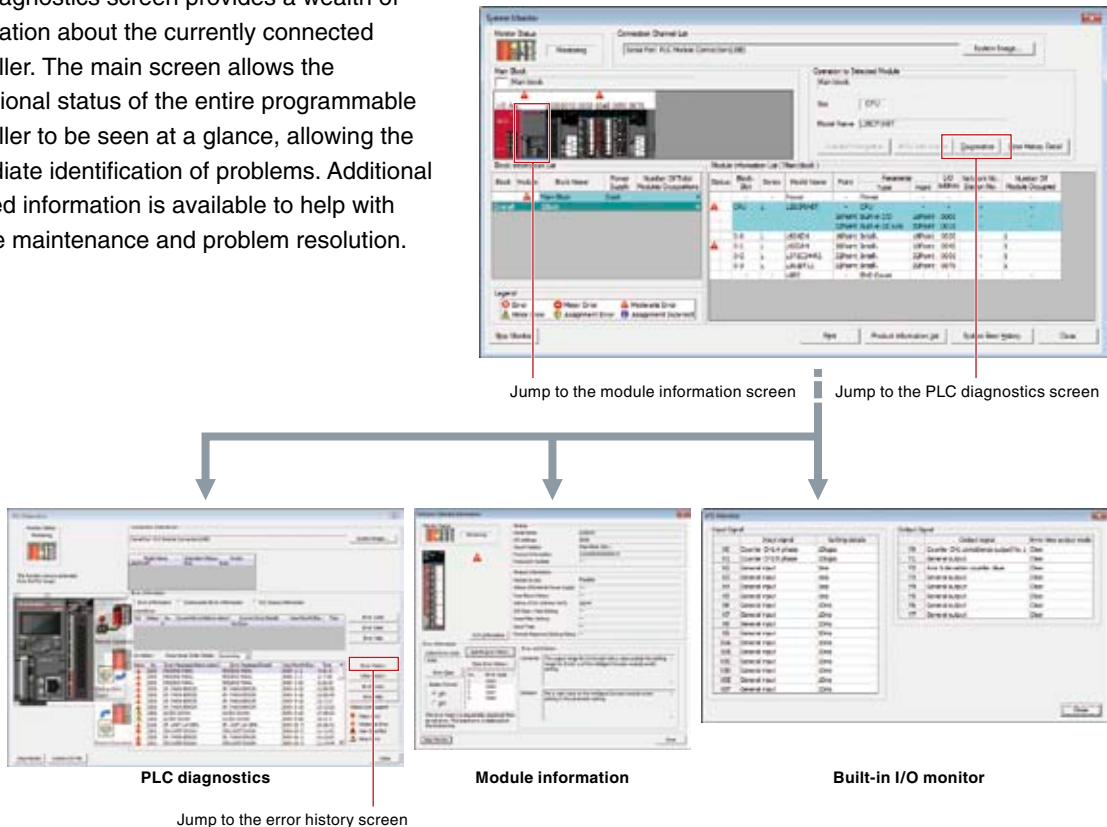

Time-stamped error history list

Simplify troubleshooting with a combined, time-stamped, error history list for the CPU and all expansion modules. The details section provides explanations of error codes and suggested solutions.

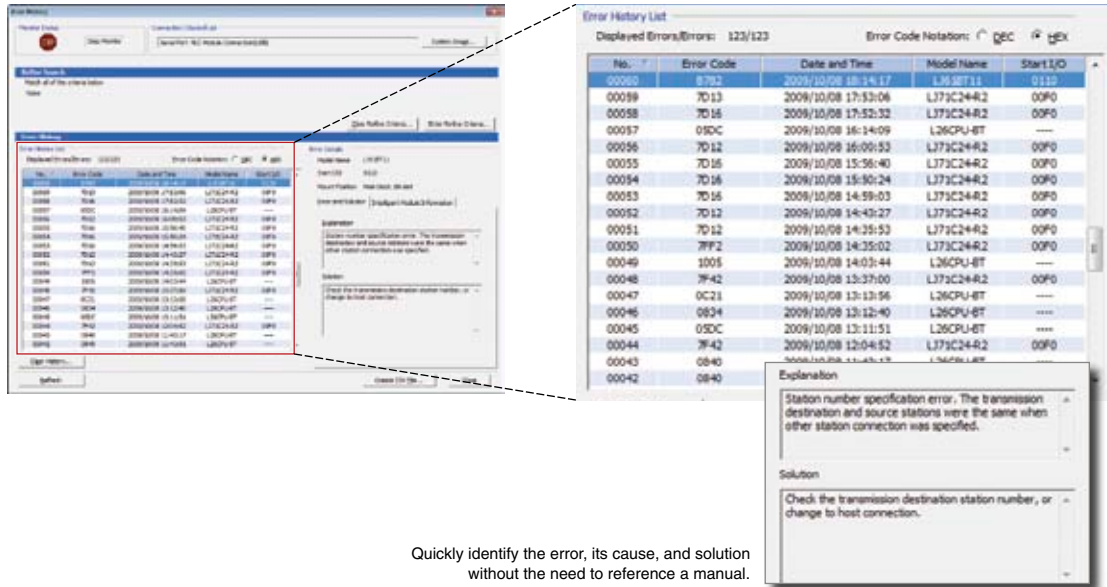

Quickly identify the error, its cause, and solution without the need to reference a manual.


Save and edit labels and parameters with Excel®

Various program data can be exported in CSV file format. Exporting to CSV format has various advantages, as shown below:

- Data can be utilized on a PC even if GX Works2 is not installed
- Data can be saved directly on the PC
- Data can be sent and utilized off-site
- Utilization of data for creating documents and graphs are possible using Excel®
- Can use in other software that support CSV format


Example of I/O assignment setting CSV file

I/O assignment setting

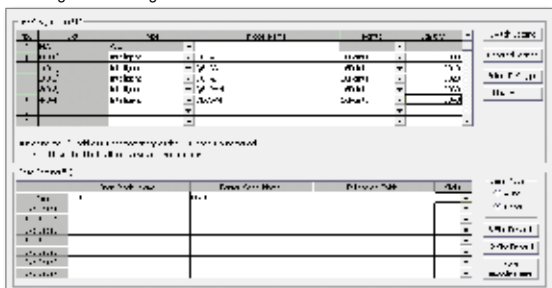


- » Ladder program..... Write/Read
- » Label setting..... Write/Read
- » Parameter (I/O assignment setting, X/Y assignment confirmation) ... Write
- » Verification results..... Write
- » Sampling trace function..... Read
(CSV file format that can be read with GX LogViewer)
- » Watch window device/label list..... Write/Read
- » System monitor diagnostics, product information, PC diagnostics, Module error history..... Write
- » Device memory..... Write/Read

CSV file

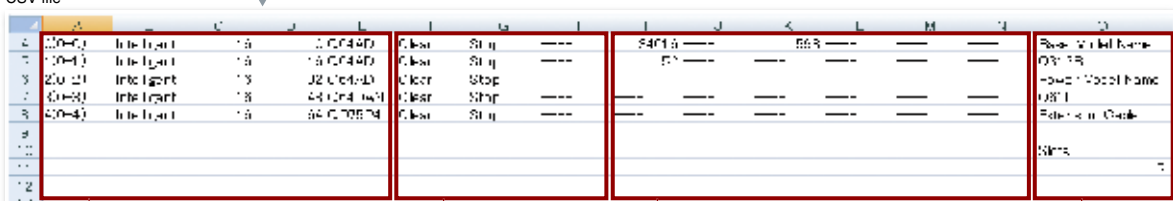

I/O assignment Advanced setting Switch setting Basic setting

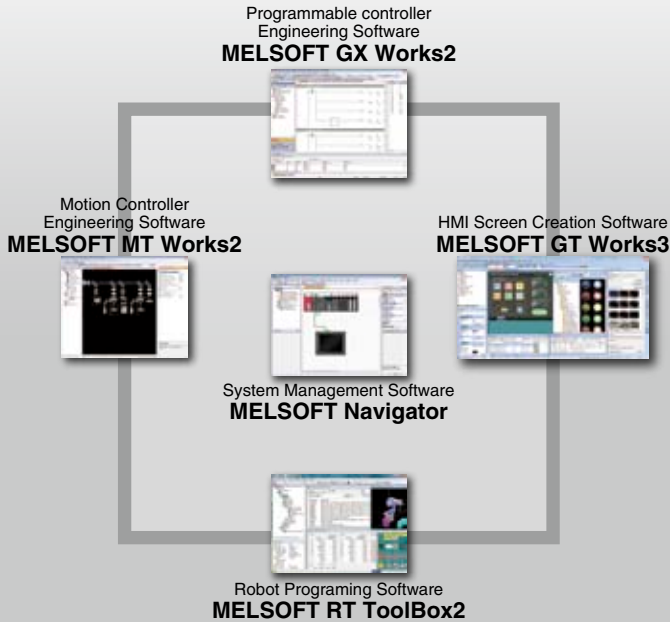


MELSOFT *iQ* Works

Next Generation Seamless Engineering Environment

iQ Works is the combination of Mitsubishi engineering software (GX Works2, MT Works2, GT Works 3, RT ToolBox2) that allows for the sharing of design information to improve programming efficiency and reduce TCO.


Graphical Project Management

The entire control system is represented using the "Network Configuration" and "Module Configuration" windows. System components are easily added using a drag & drop interface and the validity of the system can be confirmed using the check function to ensure parameters are configured correctly, the power supply is sufficient, etc. Different project types can be grouped together (for example by factory, line, and cell) for central management.

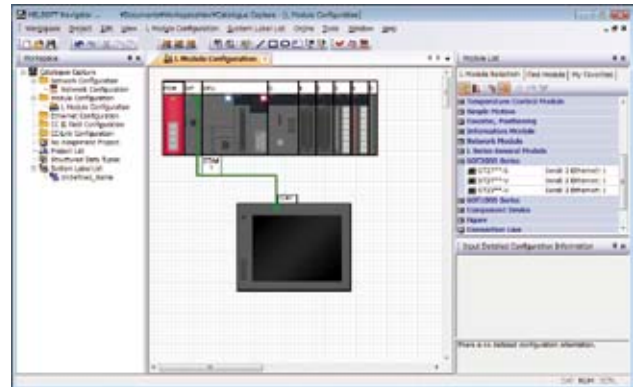

Read project data for multiple devices in a batch

Multiple projects can be read as a block just by having one connection to the programmable controller. If there are multiple devices such as other CPU or GOT on the same network as the target master programmable controller, it is possible to upload all projects to each target device without having to individually connect to each device.

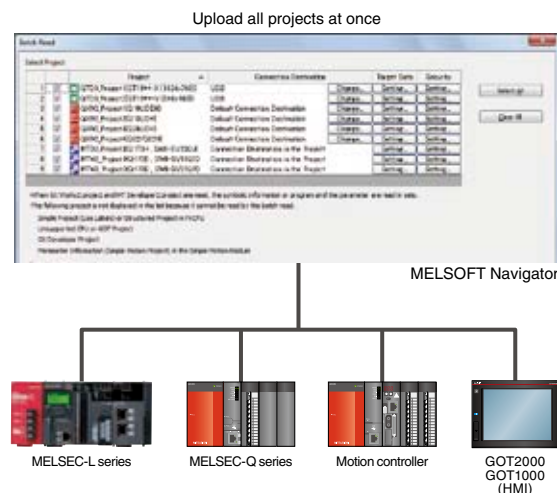

Automatically startup the relevant maintenance software with a single click

Just click on the corresponding project in the system configuration diagram or workspace tree to automatically startup the software relevant for that device. Maintenance can be efficiently performed without having to know and startup each relevant software manually.

Click on corresponding project in workspace tree



Click on corresponding device in system configuration diagram



Software for corresponding device automatically startup

GX Works2

MT Works2

GT Works3

RT ToolBox2

Setup CC-Link slave stations

There's no need to prepare a dedicated tool to check or change the parameter settings for the CC-Link slave station on-site.

The latest version of iQ Works includes CC-Link slave station setting utility. Therefore, it is possible to directly confirm the inverter parameters or change the settings for changing the speed directly from the CC-Link configuration window, for example.

In addition, error information can also be read easily.



Right-click the slave station illustration and select the "slave station parameter process"

Directly open slave station's setting screen from CC-Link configuration window.

Display

Slave station's parameter setting window opens


Set slave station parameters with GX Works2 and Navigator.

Get error information!

Prepare a device from the system configuration diagram with no manual inputs

A list of modules used can be exported as a CSV file from the system configuration diagram.

This is particularly useful when utilizing data for creating a bill of materials (BOM) in Excel®, etc.

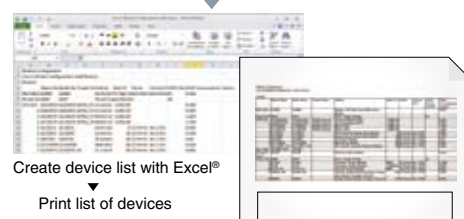



GX LogViewer


Visualizing the production process

Within modern manufacturing needs, data collection has become more important for fully optimizing the production process. GX LogViewer is a software tool that realizes visualization of large amounts of production data in a simple to use format. Utilizing this functionality to identify root error causes and improving the production rate.

Easily display and analyze large amounts of collected logging data

This tool is used when large amounts of data need to be visualized and collected from the MELSEC-Q series or MELSEC-L series.

The connection settings and checking of log files are the same as GX Works2 enabling individual connections to each module.

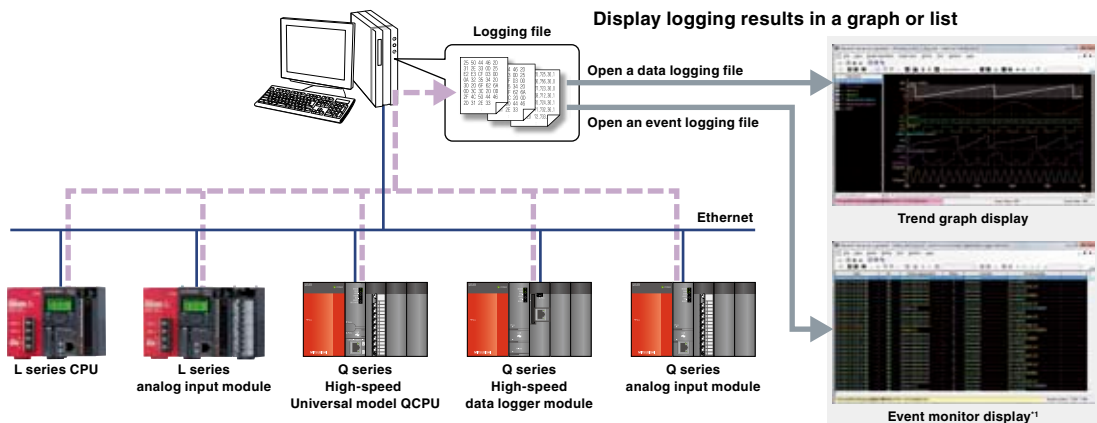


¹: The event monitor display is supported only with the Q series high-speed logger module.

Easily adjust graphs without referring to the setup manual


Arranging graphs

Able to arrange each graph so as not to overlap each other. It is easier to display the graphs as each graph is evenly spaced out.




Overlapping graphs

With this it is possible to overlap each graph over one another. Multiple graphs can be compared enabling easier data analysis and comparison.




Automatically adjusting graphs

Various attributes of the graph are automatically adjusted (max/min values) as to display the upper and lower limit values better.

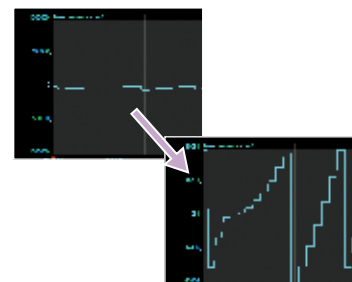

Easily confirm changes in data with dual cursors


Data changes within a designated time frame can be quickly checked with user-friendly dual cursors (multi-cursors). When the cursors are moved to the point at which changes are to be confirmed, the difference in time and value between those points will appear.

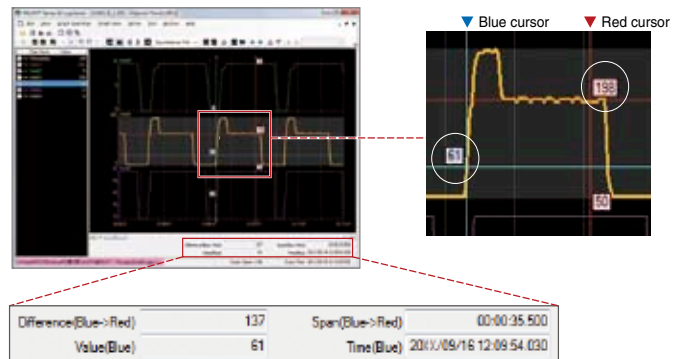

The difference in time and value between the cursors is automatically calculated and displayed.

Display data for multiple files within one graph area for easy comparison


Data for multiple files are displayed with the same time units in the same graph area. The display position within a file can be moved easily. This allows the differences of data within multiple files to be confirmed easily.

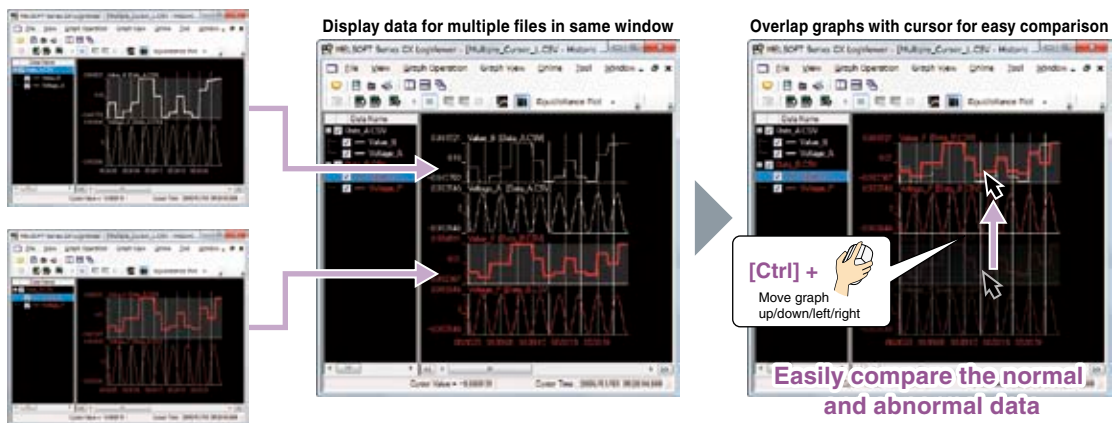

Quickly jump cursor to designated position

Cursor jump

Confirm data values by quickly moving the cursor to a designated value, time or index position in the trend graph.

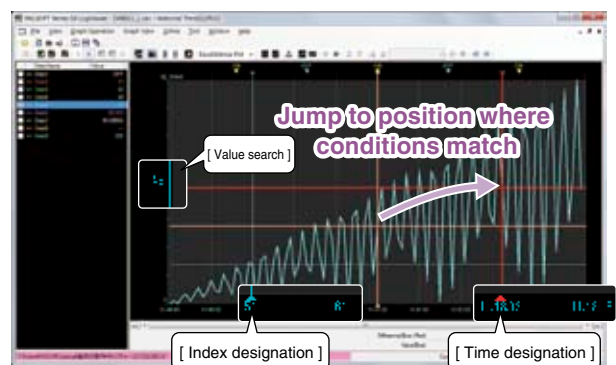

Value search
Values are searched, and the cursor jumps to the position where the conditions match.



Time designation
The cursor jumps to the designated time.



Index designation
The cursor jumps to the designated index.



HMI

Combination with GOT for all scenes from startup to maintenance

The GOT2000 boasts advanced functionality, acts as a seamless gateway to other industrial automation devices, all while increasing productivity and efficiency. The high quality display is designed to optimize operator control and monitoring of device and line statuses. If you are looking for an intuitive operation terminal, the new tablet-like operability and the higher functionality of operation terminal makes the GOT2000 the ideal choice. Incorporate the GOT2000 to bring forth flexibility, productivity, and quality on a global scale.

For details, refer to the "Mitsubishi Graphic Operation Terminal GOT2000 Series Catalog" catalog.



L(NA)08270ENG


Graphic Operation Terminal

GOT2000 series/GOT1000 series

Ladder programs can easily be edited on the GOT

Sequence Program Monitor (Ladder Editor) GT27/GT16/GT15

Sequence programs can be edited in a circuit diagram (ladder format). To quickly change contacts in an emergency, sequence programs can be edited in ladder format without using a personal computer.

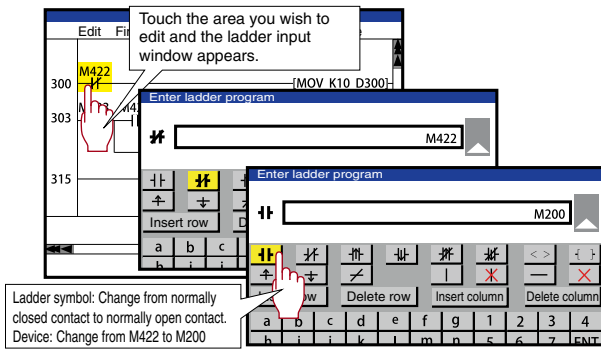

* Supported by XGA / SVGA / VGA models excluding the 5.7-inch type.
* GOT1000: L06CPU(-P), L26CPU(-P), L02SCPU-P are not supported.

Program debugging can be performed without opening the control panel

FA Transparent All models


Connected with a PC, the GOT acts as a transparent gateway to enable programming, start up, and adjustment of equipment using GX Works2 or GX LogViewer. Users do not have to bother with opening the control panel or changing cable connections. (On the GT10 series, the FA transparent function can be used via the interface on the rear side.)



Programmable Controller can be recovered promptly in case of emergency

Backup/Restore GT27/GT23/GT16/GT15/GT14


Sequence programs and parameters can be backed up to the memory card or USB memory in the GOT. Users can perform batch operation to restore the data to the PLC CPU or motion controller. Make a data backup in case of a problem such as a dead battery in a PLC CPU to quickly replace the faulty device and restore the system without using a personal computer.

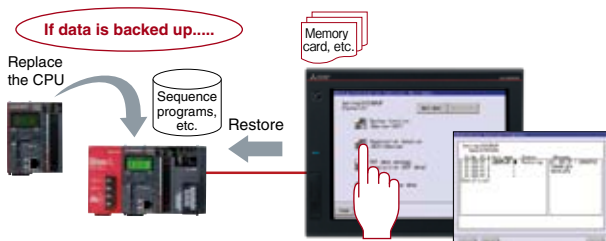

View logging data without a PC

Log Viewer GT27/GT16


Logging data can be confirmed with the GOT even if a PC is not available on-site, allowing problems to be troubleshooted quickly. Changes in the data can be quickly confirmed with the dual cursors (multi-cursors) that are displayed similar to GX LogViewer.

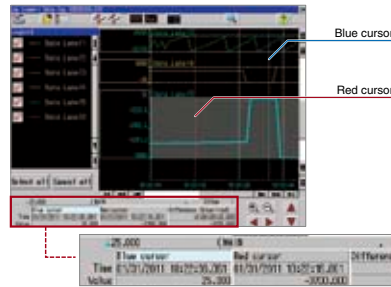

Logging data can be collected without opening the control panel

Log Viewer GT27/GT16

In a USB memory device attached to the USB interface on the front of the GOT, the logging data can be saved. The logging data can easily be collected without removing the SD card from the CPU inside of the control panel.

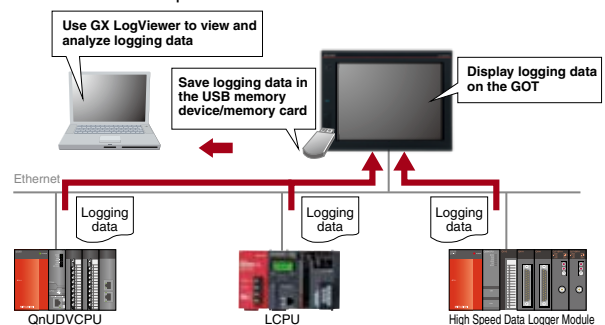

Various functions of GOT support your maintenance work

MELSEC-L Troubleshooting GT27/GT16

Just one touch to jump from the functions such as the intelligent module monitor to quickly perform troubleshooting at the worksite.





AC Servo

Man, machine and environment in perfect harmony

MELSERVO-J4 — trusted technology makes an evolutionary leap forward.

Introducing the MELSERVO-J4 series. Offering more than just improved performance, these servos are designed to drive the industries of tomorrow. Backed by Mitsubishi leadership in all-digital technology, MELSERVO has become one of the most globally respected names in factory automation. And now — with the safety, ease of use, and energy-efficient design of the new MELSERVO-J4 series — man, machine and environment can at last work together in perfect harmony.



For details, refer to the "MELSERVO-J4" catalog.

L(NA)03058

MITSUBISHI SERVO AMPLIFIERS & MOTORS

MELSERVO-J4




Machine

The leading edge in drive control

- Industry-leading level of basic performance
- High-resolution absolute position encoder
- Advanced one-touch tuning
- Advanced vibration suppression control II
- Robust filter

[Advanced one-touch tuning]

Servo gains including vibration suppression control and robust filter are adjusted just by turning on the one-touch tuning function. Machine performance is utilized to the fullest using the advanced vibration suppression control function.



Exactly matched. High-speed positioning

Man

Safety and convenience

- Equipped with the safety observation function(IEC/EN 61800-5-2)
- Tough drive function
- Large capacity drive recorder
- Machine diagnosis function
- MR Configurator2

[Large capacity drive recorder]

Servo data (motor current, etc) before and after the alarm occurrence are stored in non-volatile memory. Waveforms can be checked in graph. This enables quick and accurate identification of the cause of the alarm.




The Environment

Eco-friendly design that's winning acclaim worldwide

- Multi-axis servo amplifier
- Power monitor function
- Compatible with power regeneration common converter
- Energy-conservation achieved by improved performance

[Power monitor function]

Power consumption is calculated from the data in the servo amplifier such as speed and current, and then displayed, enabling energy-conserving system examination.

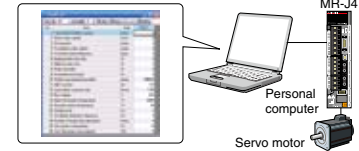

Lineup

Servo Amplifiers



MR-J4-B
SSCNET III/H compatible servo amplifier

MR-J4W2-B
SSCNET III/H compatible 2-axis servo amplifier

MR-J4W3-B
SSCNET III/H compatible 3-axis servo amplifier

With the SSCNET III/H compatible servo amplifier, a synchronous system can be configured using high-speed serial optical communication. Servo system performance and functions are utilized to the fullest when the servo amplifier is combined with the servo system controller.



MR-J4-B-RJ010 + MR-J3-T10
CC-Link IE Field Network servo amplifier with Motion

The CC-Link IE Field Network interface servo amplifier with Motion is compatible with the Motion control in the Ethernet-based open network.



MR-J4-A
General-purpose interface compatible servo amplifier

The general-purpose interface compatible servo amplifier enables position control by pulse train command and speed/torque control by analog voltage command.

Servo Motors

Rotary servo motor

- Small capacity, low inertia
HG-KR Series
Capacity: 50 to 750 W
- Small capacity, ultra-low inertia
HG-MR Series
Capacity: 50 to 750 W
- Medium capacity, medium inertia
HG-SR Series
Capacity: 0.5 to 7 kW

- Medium/large capacity, low inertia
HG-JR Series
Capacity: 0.5 to 22 kW
- Medium capacity, ultra-low inertia
HG-RR Series
Capacity: 1 to 5 kW
- Medium capacity, flat type
HG-UR Series
Capacity: 0.75 to 5 kW

Linear servo motor

- Core type
LM-H3 Series
Rating: 70 to 960 N
- Core type (natural/liquid cooling)
LM-F Series
Rating: 300 to 3000 N (natural cooling)
Rating: 600 to 6000 N (liquid cooling)
- Core type with magnetic attraction counter-force
LM-K2 Series
Rating: 120 to 2400 N
- Coreless type
LM-U2 Series
Rating: 50 to 800 N

Direct drive motor

- TM-RFM Series**
Rating: 2 to 240 N·m

L series Features
CPU
I/O
Analog/ Temperature Control
Simple Motion/ Positioning
High-Speed Counter
Network
Software
Related Products

Achieving higher drive performance and energy conservation with inverters

The inverter is a variable frequency power device that can easily and freely change the speed of a 3-phase induction motor.

The Mitsubishi inverter is high-performance and environment-conscious, and complies with global standards.

Select a model from our diverse lineup to match your needs.


Inverter



Answering various needs with the best choices Frequency Inverter

Inverter

- FREQROL800 Series **A800**
- FREQROL700 Series **A700, F700P, E700, F700PJ, D700**

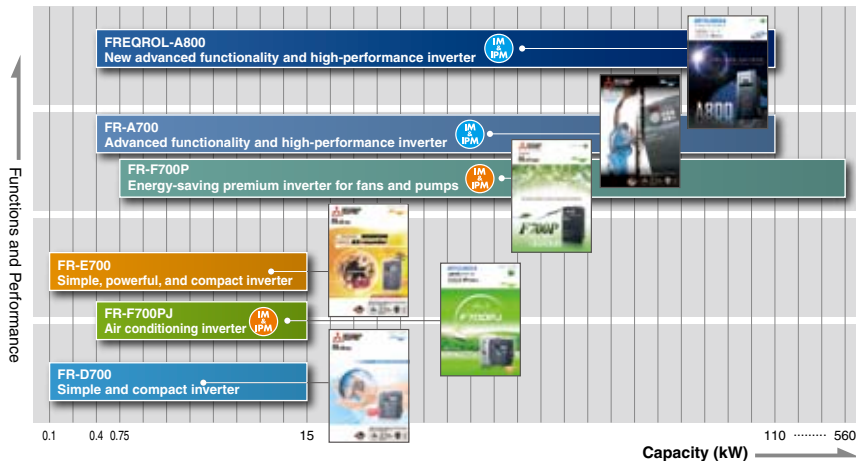


Control inverter with CC-Link communication

The inverter can be controlled to a programmable controller with CC-Link.^{*1}

This function is supported with CC-Link Ver. 1.1 and Ver. 2.0.

The inverter can be operated and monitored, and the parameters set from the programmable controller.

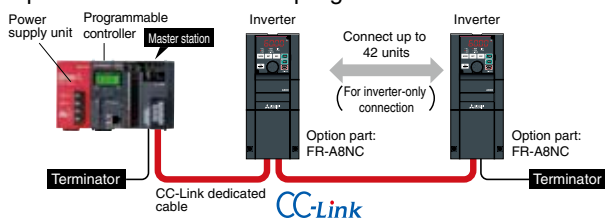


*1: The inverter operation part (FR-A8NC) is required.
Please refer to the relevant catalog for additional information.

Easy synchronous operation with SSCNET III connection

Connect to a motion controller with SSCNET III^{*2}. SSCNET III uses the high-speed synchronous serial communication method (high-speed, high-accuracy, high-reliability optical communication), and is perfect for synchronous operation.

(SSCNET: Servo System Controller Network)

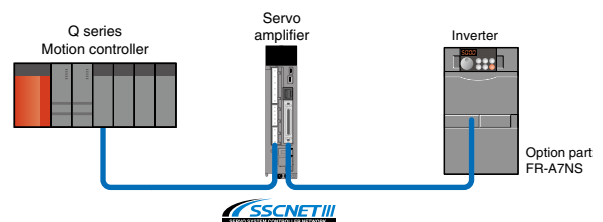

*2: Supported only with MELSEC-Q series.
The inverter operation part (FR-A7NS) is required.
Please refer to the relevant catalog for additional information.



Contactors and Motor Starters


Diverse variations to respond to all situations

The Mitsubishi Electric Contactors and Motor Starters MS-T and MS-N series and DC interface contactor SD-Q series products are equipped with an environment and global compliance, compact size, ease-of-use and safety. Certification to various international standards, this highly reliable magnetic contactor is suitable for a variety of applications from panels to systems.

For details, refer to the "Contactors and Motor Starters MS-N series" catalog.



L(NA)74109218

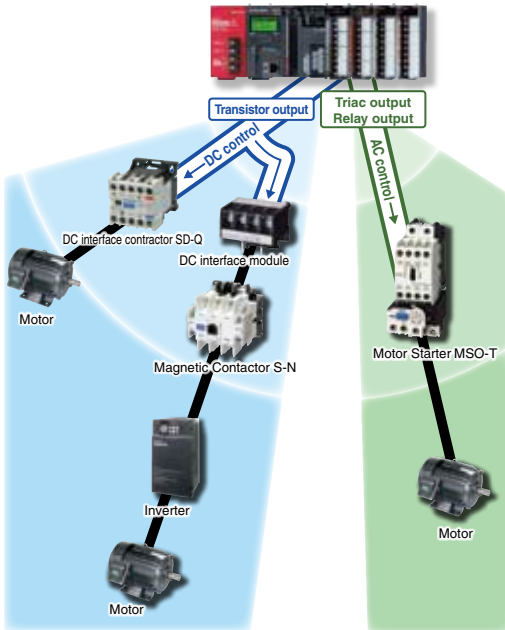

Direct drive with Programmable Controller

The SD-Q series has a small coil VA and can be driven by the programmable controller without adding an amplifying relay. By adding the DC interface module, the MS-N series can be used with a wide range of motor capacities.

| | | Programmable controller output module type | | |
|------------------------------------|--|--|----------------|--------------|
| | | Transistor output | Contact output | Triac output |
| DC interface contactor SD-Q series | DC operation | ○ | ○ | — |
| | AC operation (Using DC interface module) | ○ | ○ | ○ |
| Magnetic contactor MS-N series | DC operation | ○ | × | — |

*: This table shows the relation of the programmable controller output module type and operation interface. There may be restrictions according to the type of frame size, etc., that can be used. Refer to the MS-N Series catalog, or contact a Mitsubishi dealer or Sales Office for details on the types of magnetic switches and models that can be used.

SD-Q series

Direct drive is possible with the programmable controller's transistor output. Since a relay and interface module are not required, the number of parts can be reduced, and space can be saved.

Standard surge absorber

Prevent adverse effects onto the peripheral equipment.

Standard terminal cover

A terminal cover with finger protection function is mounted as a standard.

This cover answers to user's needs for safety.

MS-T series

Environment-friendly Mitsubishi MS-N series ensures safety and conforms to various global standards. This series greatly contributes to smaller panels, easier selection and compliance with international standards.


MS-T series(10A~32A)

Mitsubishi Electric's main series is equipped with a small size, ease-of-use, safety and international compliance. This series greatly contributes to smaller panels, easier selection and compliance with international standards.

10A frame model is just 36mm wide!!

The industry's smallest width has been realized for the general-purpose magnetic contactor. The other rated products have also been downsized to help you reduce your panel size.

*: 10A frame general-purpose magnetic contactor (Mitsubishi Electric survey as of Jan. 2014)

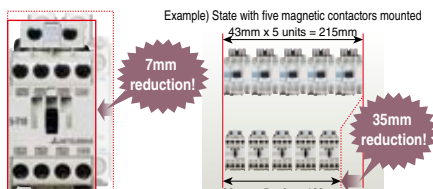

Wide range of operation coil ratings!!

The wider operation coil rating ranges allows us to consolidate the number of coil types from 14 types (N Series) to 7 types.

This helps reduce stock and makes it easier to select the required type.

Standard terminal cover!!

The standard terminal cover improves the safety in the panel, and simplifies ordering as a separate model no longer needs to be specified.



Vision Solution

COGNEX[®] machine vision system and Mitsubishi Electric FA Devices Innovating your production with this integral power.

Functioning as devices that “watch” instead of human eyes, COGNEX machine vision systems have continued to reform automation of production lines. Mitsubishi Electric FA devices, such as programmable controllers, lead the tomorrow of FA control.

The possibilities of vision system solutions, created in the integration of this spirit of innovation, have continued to increase. “In-Sight EZ”, developed exclusively for use with Mitsubishi Electric FA devices, enhances functions.

Affinity, including connectivity and ease of program development, has also been refined.

The key solution for enhancing efficiency of inspections and identification, etc., for improving product quality and for reducing total costs lies within the integrated power of COGNEX + MITSUBISHI.



L(NA)08230E

For details, refer to the "Vision System & Factory Automation Solution" catalog.


FA Integral Solutions

e-F@ctory + COGNEX Vision

“e-F@ctory” is an assimilation of solutions that integrate the “MES interface” enabling “visualization” with seamless information sharing and “iQ Platform” realizing flexible sharing within the production site.

Mitsubishi Electric collaborates with partners from various fields to supports general factory optimization through the “e-F@ctory” concept.

The latest achievement is the partnership of COGNEX Vision products and Mitsubishi Electric FA Devices.

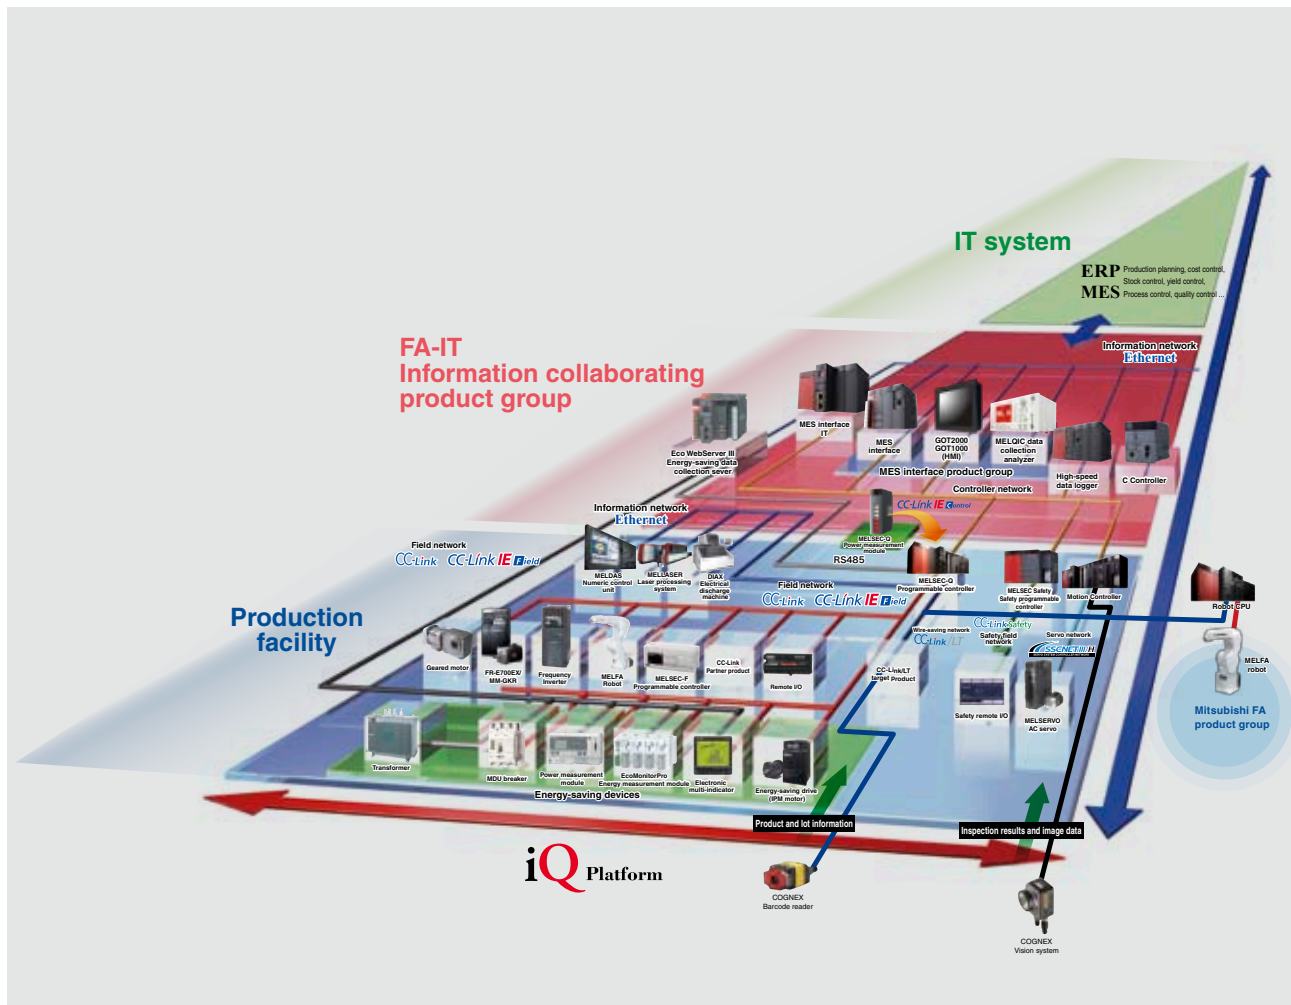

COGNEX In-Sight EZ Series

iQSS compatible


Partner Product

| | |
|------------------------------------|---------------|
| ●Entry model | EZ-700 |
| ●Standard model | EZ-720 |
| ●High-speed processing model | EZ-740 |
| ●High resolution model | EZ-742 |

Simple connection

Directly connect with Ethernet

The "In-Sight EZ" can be directly connected to the Ethernet port provided on the "MELSEC-Q series universal model" and "MELSEC-L" programmable controller, and to the Ethernet module on the MELSEC-F. By using a switching hub, a multi-unit vision system having units installed as far as 100m away can be created.



Connect with CC-Link

The expansion module option (CIO-MICRO-CC) supports the reliable open field network "CC-Link". The impressive high-speed response, reaching up to 10Mbps, high reliability and max. 1.2km long distant transmission allows a highly reliable system to be designed freely. CC-Link settings can be completed easily with EasyBuilder.



Simple communication with SLMP

Now that "In-Sight EZ" supports SLMP (Seamless Message Protocol), data can be easily written from the vision system to the programmable controller. Communication is easily configured with "EasyBuilder". Just select the connected device and SLMP, set the programmable controller device used for communication and select the communication data from the list. With the SLMP scanner mode, a trigger can be applied on the vision system via SLMP.



Simple control with control dedicated function blocks (FB)

The vision system control program can be created in a short time using the programmable controller programming tool "GX Works2" and rearranging labels by dragging and dropping the vision system control FB.

COGNEX DataMan® Barcode Reader

Partner Product

| | |
|--------------------------|----------------------------|
| ●Fixed DataMan | DataMan 100/200/300 |
| ●Hand-held DataMan | DataMan 8100/8500 |

Supporting a variety of barcode reading

Industrial Ethernet compatible barcode reader

This barcode reader with Ethernet can easily be connected to the programmable controller with SLMP, and can be used in a system with In-Sight EZ in the same Ethernet line.

With the Ethernet compatible DataMan, the read code can be adjusted with VisionView® in the same manner as In-Sight EZ.

In collaboration with e-F@ctory, the code reading results and images can be sent to the MES interface unit.

Reading various codes with simple adjustments

DataMan automatically optimizes the brightness of the image. The automatic focusing model adjusts the focal distance from the barcode reader and workpiece simultaneously, and greatly reduces the man-hours required from installation to operation.


The DataMan common setup tool is available for more detailed settings.

Amazing code reading algorithms IDMax®

2DMax+™: Provides an amazing two-dimensional code reading performance when directly marking parts with a laser or dot peen.

1DMax+™: The new **HOTBARS™** technology allows weak codes and damaged large codes to be read at a high speed. Various situations not supported with conventional laser scanning methods are not supported.

DataMan - active in various industries

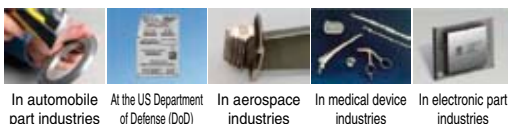


In automobile part industries At the US Department of Defense (DoD) In aerospace industries In medical device industries In electronic part industries

●Fixed DataMan 300 Series

- ▶ Equipped with latest reading algorithm 1DMax+, 2DMax+
- ▶ Powerful in reading extra small markings with a high resolution of 1,300,000 pixels
- ▶ Reduce installation and maintenance man-hours with liquid lens (option) for automatic focus adjustment and the tuning function
- ▶ Support for MC protocol scanner simplifies communication settings



DataMan 300

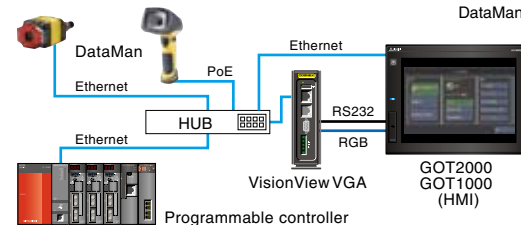

●Hand-held DataMan 8100/8500 Series


- ▶ Newly developed body enhances sturdiness
- ▶ UltraLight®: Two types of lightning enable optimum reading*1
- ▶ Standard automatic focus adjustment function
- ▶ Wireless model (communication range: max. 30m) available




DataMan 8500

CPU Modules


L02SCPU, L02SCPU-P

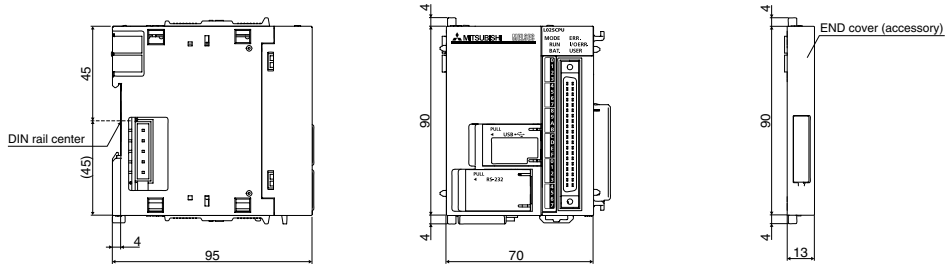

L02CPU, L02CPU-P, L06CPU, L06CPU-P, L26CPU, L26CPU-P

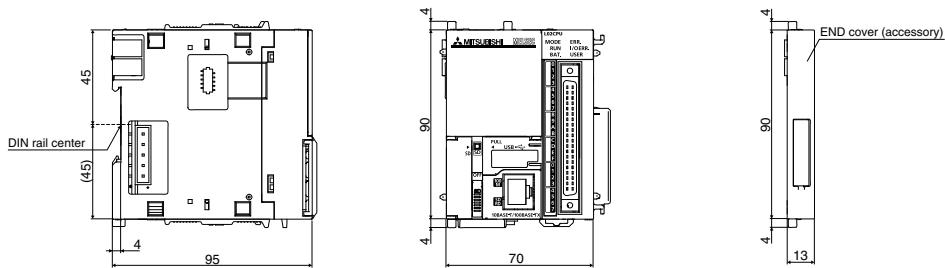


L26CPU-BT, L26CPU-PBT

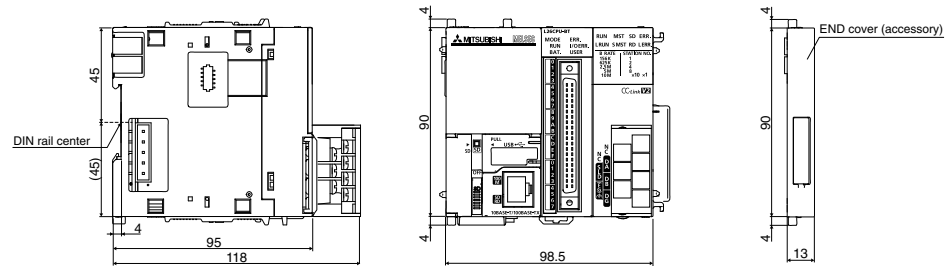


Display Unit

L6DSPU

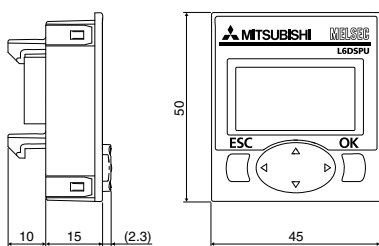

RS-232 adapter


L6ADP-R2

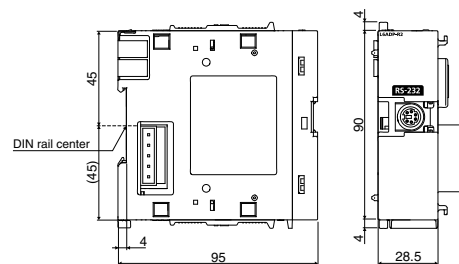

Unit: mm


RS-422/485 adapter

L6ADP-R4 **NEW**

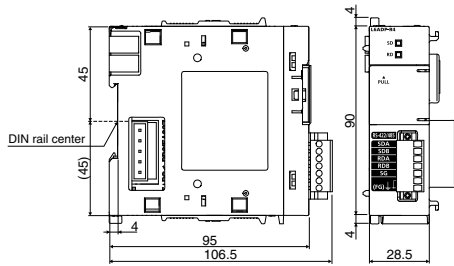


END cover with error terminal

L6EC-ET

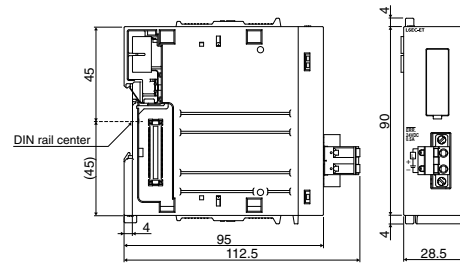


Power Supply Modules

L61P, L63P

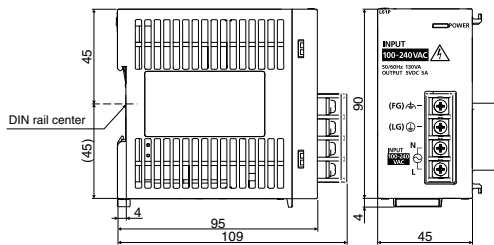


L63SP

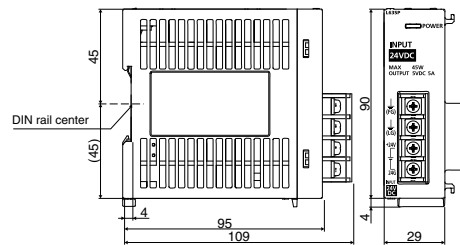


Branch Module

L6EXB

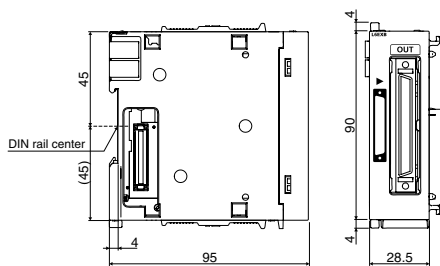


Extension Module

L6EXE

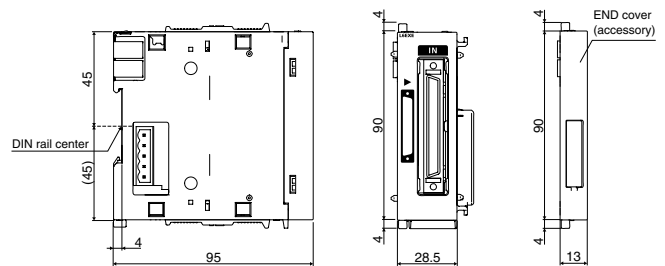

Extension Cable

LC06E, LC10E, LC30E


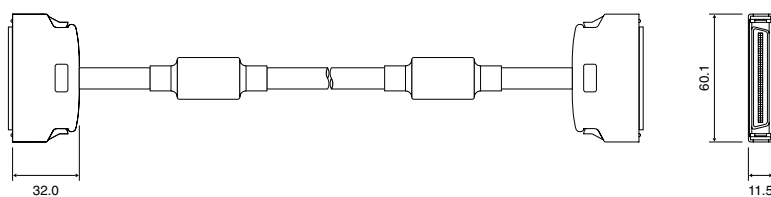


Unit: mm


Input/Output/I/O combined module

LX10, LX28, LX40C6,
LY10R2, LY20S6, LY40NT5P, LY40PT5P

LX41C4, LY41NT1P, LY41PT1P

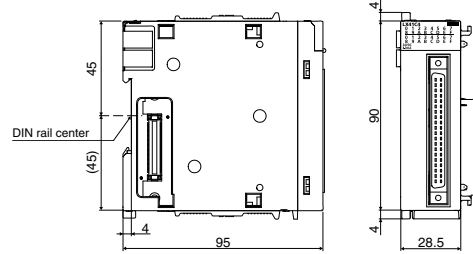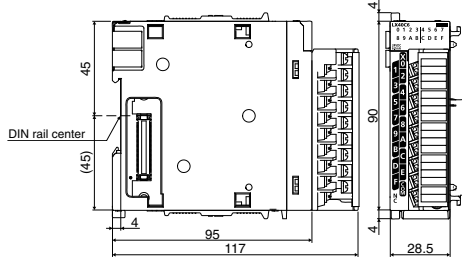


LX42C4, LY42NT1P, LY42PT1P
LH42C4NT1P, LH42C4PT1P

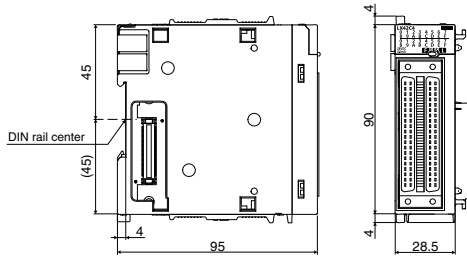

Analog Input/Output/I/O module



L60AD4, L60DA4, L60AD4-2GH, L60AD2DA2

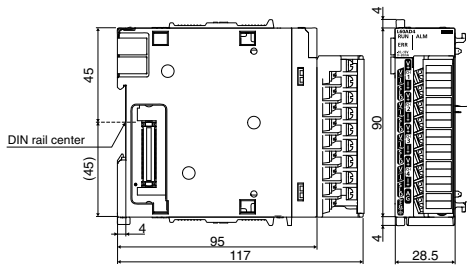

Temperature Control Modules

L60TCTT4, L60TCRT4


L60TCTT4BW, L60TCRT4BW

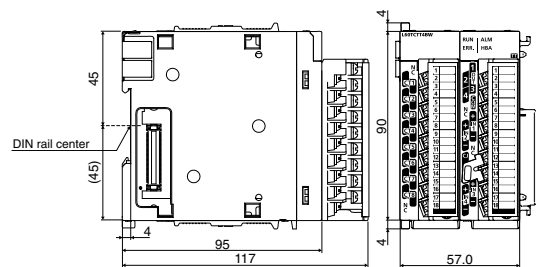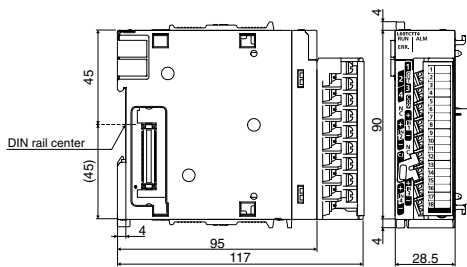

Unit: mm


Simple Motion Module

LD77MS2, LD77MS4, LD77MS16,
LD77MH4, LD77MH16

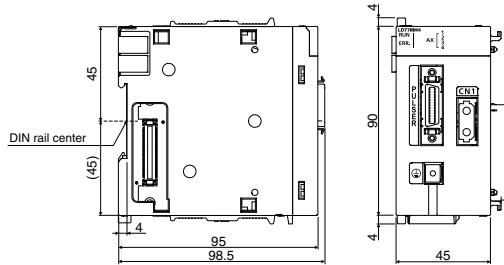


Positioning Modules


LD75P1, LD75P2

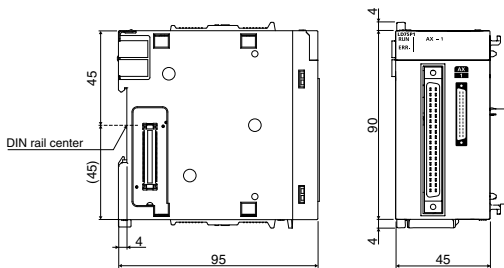


LD75D1, LD75D2

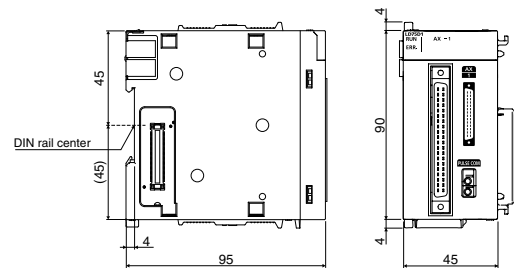

LD75P4

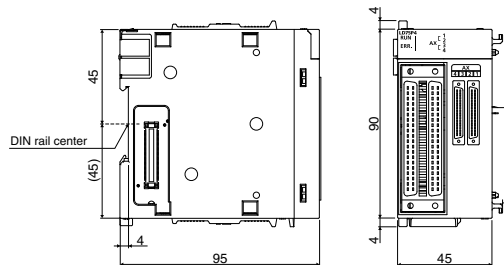


LD75D4

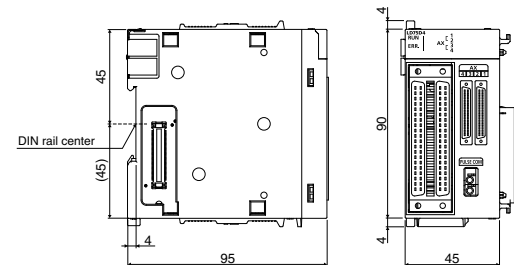

High-Speed Counter Module


LD62, LD62D

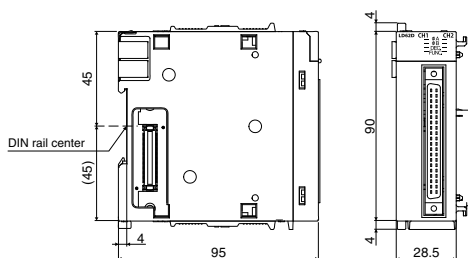

Unit: mm


CC-Link IE Field Network Master/Local Module

LJ71GF11-T2

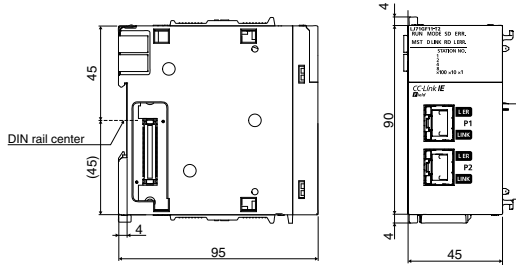


CC-Link IE Field Network Head Module

LJ72GF15-T2

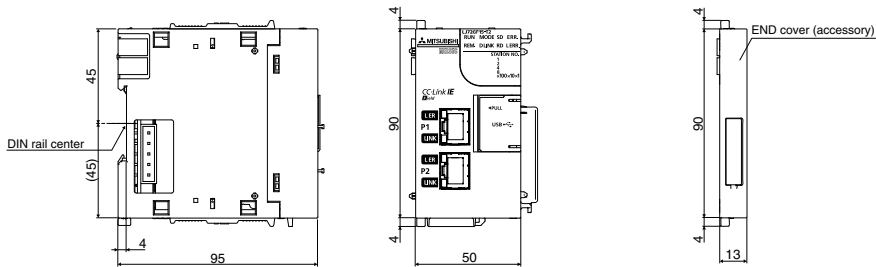


CC-Link Master/Local Module

LJ61BT11

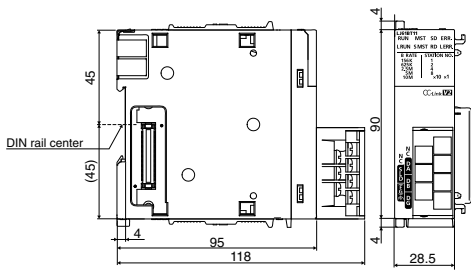


CC-Link/LT Master Module

LJ61CL12

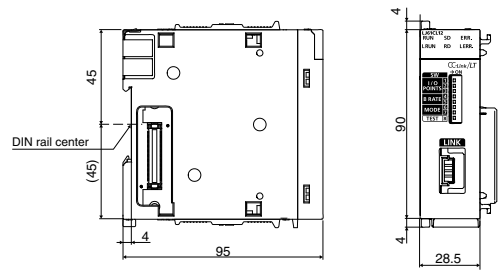

SSCNET III/H Head Module


LJ72MS15

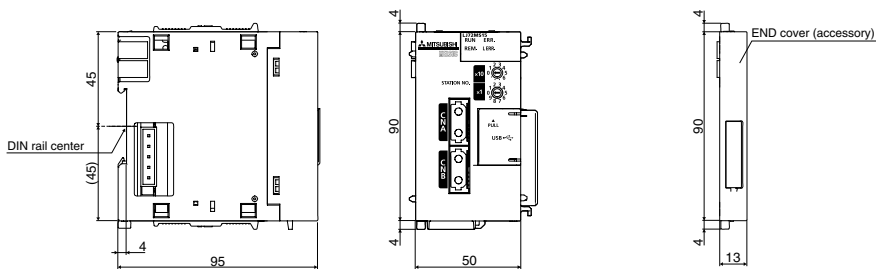

Unit: mm

Ethernet interface module



LJ71E71-100

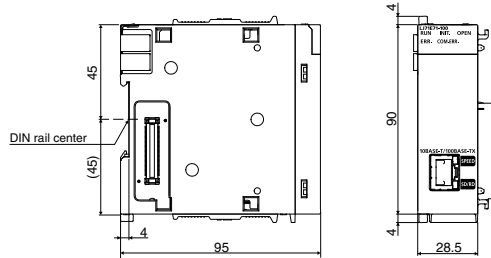

Serial Communication Modules

LJ71C24

LJ71C24-R2

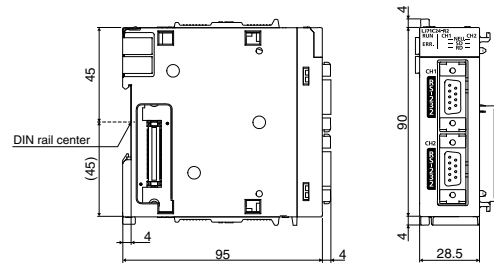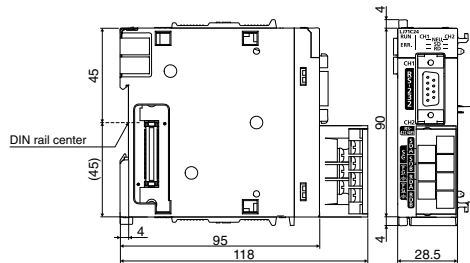

Unit: mm

Extensive global support coverage providing expert

Global FA centers

"Mitsubishi Electric Global FA centers" have been established in various countries around the world to cover the Americas, Europe, and Asia. FA centers help to ensure compliance with the certifications and regulations of different regions, initiate product development in response to local demands, and provide full-time, professional customer service.

German FA Center
Mitsubishi Electric Europe B.V. German Branch
 Gothaer Strasse 8, D-40880 Ratingen, Germany
 Tel: +49-2102-486-0 / Fax: +49-2102-486-1120
 Area covered: Mainly Western Europe

Russian FA Center
Mitsubishi Electric Europe B.V. Russian Branch St.Petersburg office
 Piskarevsky pr. 2, bld.2, lit "Sch", BC "Benua", office 720, 195027, St. Petersburg, Russia
 Tel: +7-812-633-3497 / Fax: +7-812-633-3499
 Area covered: Russia

Taiwan FA Center
L : Setsuyo Enterprise Co., Ltd.
 6F., No.105, Wugong 3rd Road, Wugu District, New Taipei City 24869, Taiwan, R.O.C.
 Tel: +886-2-22299-2499 / Fax: +886-2-2299-2509
R : Mitsubishi Electric Taiwan Co.,Ltd.
 No.8-1, Industrial 16th Road, Taichung Industrial Park, Taichung, Taiwan 407, R.O.C.
 Tel: +886-(0)4-2359-0688 / Fax: +886-(0)4-2359-0689
 Area covered: Taiwan

UK FA Center
Mitsubishi Electric Europe B.V. UK Branch
 Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, UK.
 Tel: +44-1707-28-8780 / Fax: +44-1707-27-8695
 Area covered: UK, Ireland

Czech republic FA Center
Mitsubishi Electric Europe B.V. Czech Branch
 Avenir Business Park, Radicka 751/113a, 158 00 Praha5, Czech Republic
 Tel: +420-251-551-470 / Fax: +420-251-551-471
 Area covered: Czech, Slovakia

European FA Center
Mitsubishi Electric Europe B.V. Polish Branch
 32-083 Balice ul. Krakowska 50, Poland
 Tel: +48-12-630-47-00 / Fax: +48-12-630-47-01
 Area covered: Central and Eastern Europe

Turkey FA Center
Mitsubishi Electric Turkey A.Ş Ümraniye Branch
 Serifali Mahallesi Nutuk Sokak No:5 TR-34775 Ümraniye, Istanbul, Turkey
 Tel: +90-216-526-3990 / Fax: +90-216-526-3995
 Area covered: Turkey

India FA Center
Mitsubishi Electric India Pvt. Ltd. India Factory Automation Centre
 Emerald House, EL-3, J Block, M.I.D.C., Bhosari, Pune, 411026, Maharashtra State, India
 Tel: +91-20-2710-2000 / Fax: +91-20-2710-2100
 Area covered: India

Thailand FA Center
Mitsubishi Electric Automation (Thailand) Co., Ltd.
 12th Floor, SV City Building, Office Tower 1, No. 896/19 and 20 Rama 3 Road, Kwaeng Bangongpang, Khet Yannawa, Bangkok 10120, Thailand
 Tel: +66-2682-6522 / Fax: +66-2682-6020
 Area covered: Thailand

ASEAN FA Center
Mitsubishi Electric Asia Pte. Ltd. ASEAN Factory Automation Centre
 307 Alexandra Road #05-01/02, Mitsubishi Electric Building, Singapore
 Tel: +65-6470-2480 / Fax: +65-6476-7439
 Area covered: Southeast Asia

Nagoya, Japan

Beijing FA Center
Mitsubishi Electric Automation (CHINA) Ltd. Beijing Office
 Unit 908, Office Tower 1, Henderson Centre, 18 Jianguomennei Avenue, Dongcheng District, Beijing, China
 Tel: +86-10-6518-8830 / Fax: +86-10-6518-3907
 Area covered: China

Tianjin FA Center
Mitsubishi Electric Automation (CHINA) Ltd. Tianjin Office
 Unit 2003, Tianjin City Tower, No.35, You Yi Road, Hexi District, Tianjin, China
 Tel: +86-22-2813-1015 / Fax: +86-22-2813-1017
 Area covered: China

Guangzhou FA Center
Mitsubishi Electric Automation (CHINA) Ltd. Guangzhou Office
 Fm.1609, North Tower, The Hub Center, No.1068, Xin Gang East Road, Haizhu District, Guangzhou, China
 Tel: +86-20-8923-6730 / Fax: +86-20-8923-6715
 Area covered: China


Local factory in China
Mitsubishi Electric Dalian Industrial Products Co., Ltd.

Local factory in China
Mitsubishi Electric Automation Manufacturing (Changshu) Co., Ltd.
 No.706 Southeast Building, Chengahu Southeast Economic Development Zone of Jiangsu, 215500 China
 Tel: 86-512-5213-3077 / Fax: 86-512-5213-3088

Shanghai FA Center
Mitsubishi Electric Automation (China) Ltd.
 10F, Mitsubishi Electric Automation Center, No.1386 Hongqiao Road, Changning District, Shanghai, China
 Tel: 86-21-2322-3030 / Fax: 86-21-2322-3000
 Area covered: China

help whenever needed.

- FA center
- FA center satellite (China)
- Mechatronics service center (China)
- Sales and Service office
- Factory location
- ◆ Development center

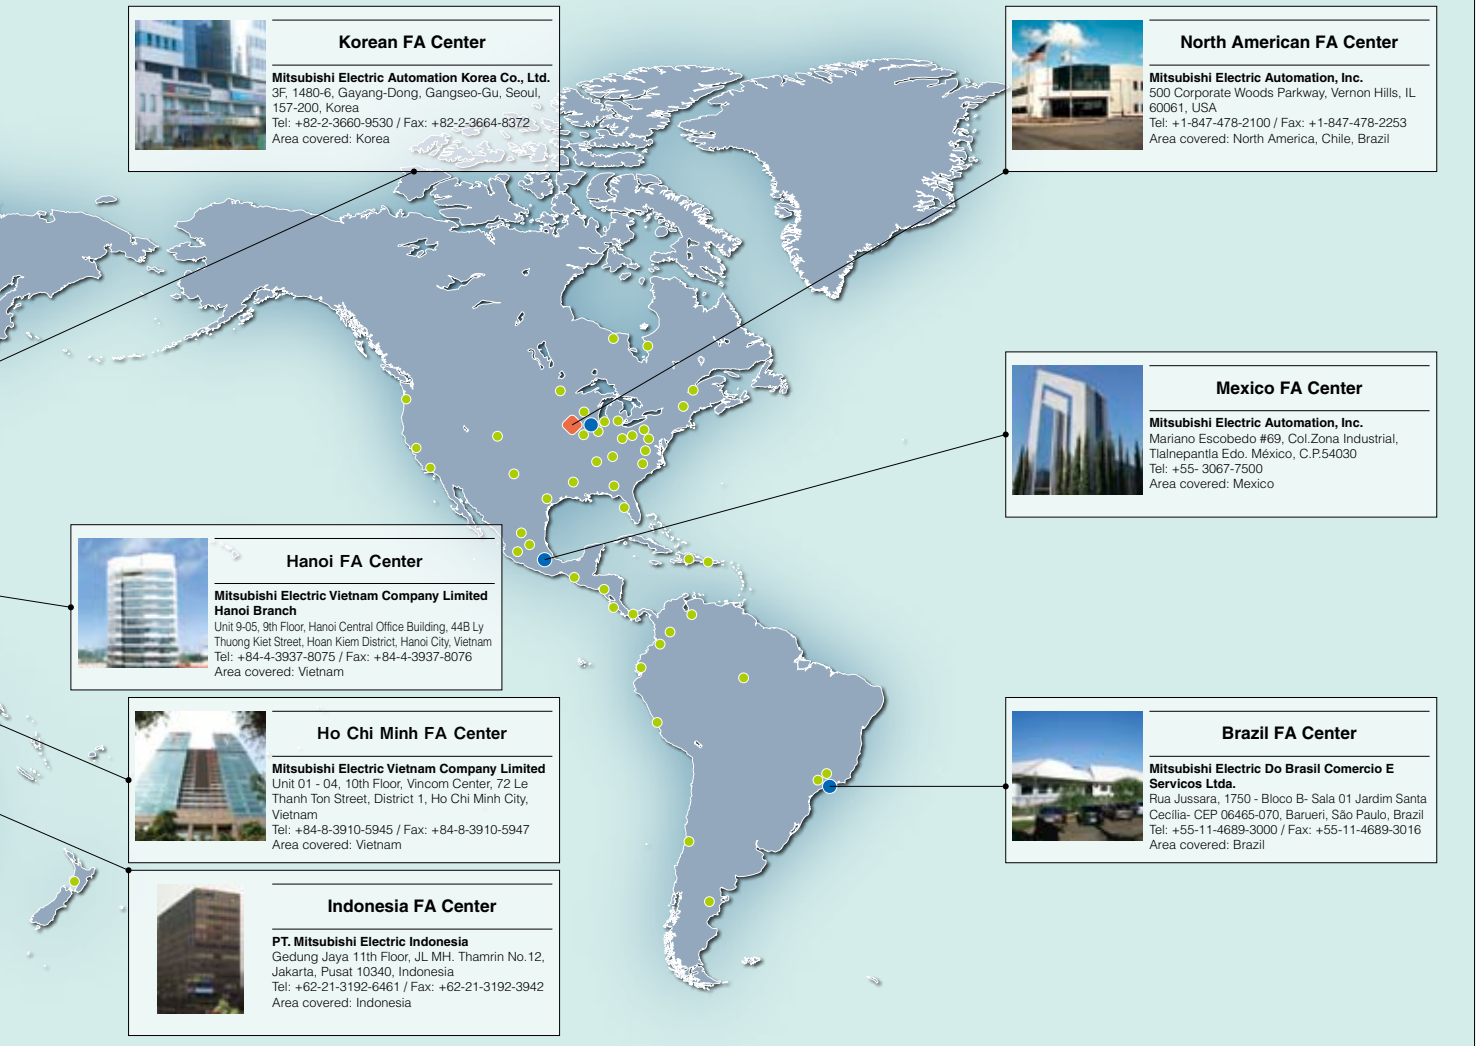

Product List

Refer to the product user manuals for information about compatible modules, restrictions, etc., before using the products.
Visit the Mitsubishi Electric FA site or contact your nearest branch for the latest information on the MELSOFT versions and compatible OS.

MELSEC-L series

[Legend] **DB** : Double brand product ^(Note) **NEW** : Recently released product **SOON** : Product available soon

| Type | Model | Outline | |
|-------------------------------|--|--|---|
| CPU | L02SCPU | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 60ns, Program memory capacity: 80KB, Peripheral connection ports: USB and RS-232 (Predefined protocol support function), Memory card I/F: None, Built-in I/O functions (General-purpose input:16 points, General purpose output (Sink type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L02SCPU-P | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 60ns, Program memory capacity: 80KB, Peripheral connection ports: USB and RS-232 (Predefined protocol support function), Memory card I/F: None, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Source type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L02CPU | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 40ns, Program memory capacity: 80KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Sink type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L02CPU-P | Number of I/O points: 1024 points, Number of I/O device points: 8192 points, Program capacity: 20K steps, Basic operation processing speed (LD instruction): 40ns, Program memory capacity: 80KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Source type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L06CPU | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 60K steps, Basic operation processing speed (LD instruction): 9.5ns, Program memory capacity: 240KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Sink type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L06CPU-P | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 60K steps, Basic operation processing speed (LD instruction): 9.5ns, Program memory capacity: 240KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Source type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L26CPU | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5ns, Program memory capacity: 1040KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Sink type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L26CPU-P | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5ns, Program memory capacity: 1040KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Source type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), END cover included | |
| | L26CPU-BT | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5ns, Program memory capacity: 1040KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Sink type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), CC-Link master/local station function, END cover included | |
| L26CPU-PBT | Number of I/O points: 4096 points, Number of I/O device points: 8192 points, Program capacity: 260K steps, Basic operation processing speed (LD instruction): 9.5ns, Program memory capacity: 1040KB, Peripheral connection ports: USB and Ethernet (Predefined protocol support function), Memory card I/F: SD Memory Card, Built-in I/O functions (General-purpose input:16 points, General-purpose output (Source type):8 points, Interrupt input, Pulse catch, Positioning, High-speed counter), CC-Link master/local station function, END cover included | | |
| CPU packages | L02CPU-SET | CPU module (L02CPU), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L02CPU-P-SET | CPU module (L02CPU-P), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L06CPU-SET | CPU module (L06CPU), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L06CPU-P-SET | CPU module (L06CPU-P), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L26CPU-SET | CPU module (L26CPU), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L26CPU-P-SET | CPU module (L26CPU-P), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L26CPU-BT-SET | CPU module (L26CPU-BT), Display unit (L6DSPU), and Power supply module (L61P) set | |
| | L26CPU-PBT-SET | CPU module (L26CPU-PBT), Display unit (L6DSPU), and Power supply module (L61P) set | |
| CPU options | Display unit | L6DSPU STN black-and-white LCD, 16 characters x4 lines | |
| | Battery | Q6BAT | Replacement battery |
| | | Q7BAT-SET | High capacity battery with a battery holder for CPU installation |
| | | Q7BAT | High capacity replacement battery |
| | SD Memory Card | L1MEM-2GBSD** | 2GB SD Memory Card |
| | | L1MEM-4GBSD** | 4GB SD Memory Card |
| | RS-232 adapter | L6ADP-R2 | For GOT connection, 1 x RS-232 channel, maximum transmission speed: 115.2Kbps, MELSOFT connectable MODBUS® RTU master function (using predefined protocol support function) |
| RS-422/485 adapter | L6ADP-R4 NEW | For GOT connection, 1 x RS-422/485 channel, maximum transmission speed: 115.2Kbps MODBUS® RTU master function (using predefined protocol support function) | |
| END cover with error terminal | L6EC-ET | END cover with error terminal | |

*1: Mitsubishi Electric does not guarantee the operation of non-Mitsubishi Electric products.

Note: General specifications and product guarantee conditions of jointly developed products are different from those of MELSEC products.
For more information, please refer to the product manuals or contact your local Mitsubishi representative for details.

MELSEC-L series

[Legend] **DB** : Double brand product **NEW** : Recently released product **SOON** : Product available soon

| Type | | Model | Outline | |
|---------------------------|-------------------------------------|---------------------|--|---|
| Power supply | | L61P | Input voltage: 100 to 240V AC, Output voltage: 5V DC, Output current: 5A | |
| | | L63P | Input voltage: 24V DC, Output voltage: 5V DC, Output current: 5A | |
| | Slim type Power supply | L63SP | Input voltage: 24V DC, Output voltage: 5V DC, Output current: 5A, No isolation | |
| Branch / Extension module | | L6EXB | Branch module | |
| | | L6EXE | Extension module with END cover | |
| | Extension cable | LC06E | 0.6-m cable for connecting branch and extension modules | |
| | | LC10E | 1.0-m cable for connecting branch and extension modules | |
| | | LC30E | 3.0-m cable for connecting branch and extension modules | |
| I/O module | Input | AC input | LX10 | 16 points, 100 to 120V AC, Response time:20ms or less, 16 points/common, 18-point terminal block |
| | | | LX28 | 8 points, 100 to 240V AC, Response time:20ms or less, 8 points/common, 18-point terminal block |
| | | DC input | LX40C6 | 16 points, 24V DC, Response time: 1/5/10/20/70ms or less, 16 points/common, Positive/Negative common, 18-point terminal block |
| | | | LX41C4 | 32 points, 24V DC, Response time: 1/5/10/20/70ms or less, 32 points/common, Positive/Negative common, 40-pin connector |
| | | | LX42C4 | 64 points, 24V DC, Response time: 1/5/10/20/70ms or less, 32 points/common, Positive/Negative common, 40-pin connector x2 |
| | Output | Relay | LY10R2 | 16 points, 24V DC/240V AC, 2A/point, 8A/common, Response time: 12ms or less, 16 points/common, 18-point terminal block |
| | | Triac | LY20S6 | 16 points, 100 to 240V AC, 0.6A/point, 4.8A/common, Response time:1ms + 0.5 cycles or less, 16 points/common, 18-point terminal block |
| | | Transistor (Sink) | LY40NT5P | 16 points, 12 to 24V DC, 0.5A/point, 5A/common, Response time: 1ms or less, 16 points/common, 18-point terminal block, overload protection function, overheat protection function, surge suppression |
| | | | LY41NT1P | 32 points, 12 to 24V DC, 0.1A/point, 2A/common, Response time: 1ms or less, 32 points/common, Sink type, 40-pin connector, overload protection function, overheat protection function, surge suppression |
| | | | LY42NT1P | 64 points, 12 to 24V DC, 0.1A/point, 2A/common, Response time: 1ms or less, 32 points/common, Sink type, 40-pin connector x2, overload protection function, overheat protection function, surge suppression |
| | | Transistor (Source) | LY40PT5P | 16 points, 12 to 24V DC, 0.5A/point, 5A/common, Response time: 1ms or less, 16 points/common, 18-point terminal block, overload protection function, overheat protection function, surge suppression |
| | | | LY41PT1P | 32 points, 12 to 24V DC, 0.1A/point, 2A/common, Response time: 1ms or less, 32 points/common, 40-pin connector, overload protection function, overheat protection function, surge suppression |
| | | | LY42PT1P | 64 points, 12 to 24V DC, 0.1A/point, 2A/common, Response time: 1ms or less, 32 points/common, 40-pin connector x2, overload protection function, overheat protection function, surge suppression |
| | | I/O combined | DC input/transistor output (sink) | LH42C4NT1P |
| | DC input/transistor output (source) | | LH42C4PT1P | Input specifications : 32 points, 24V DC, Response time: 1/5/10/20/70ms or less, 32 points/common, Positive/Negative common Output specifications : 32 points, 12 to 24V DC, 0.1A/point, 2A/common, Response time: 1ms or less, 32 points/common, overload protection function, overheat protection function, surge suppression 40-pin connector x2 |

MELSEC-L series

[Legend] **DB** : Double brand product **NEW** : Recently released product **SOON** : Product available soon

| Type | Model | Outline |
|---|--|--|
| Analog I/O module | Analog input | L60AD4 4 channels, Input: -10 to 10V DC, 0 to 20mA DC, Output (resolution): 0 to 20000, -20000 to 20000, Conversion speed: 20µs, 80µs, 1ms/channel, 18-point terminal block |
| | | L60AD4-2GH 4 channels, Input: -10 to 10V DC, 0 to 20mA DC, Output (resolution): 0 to 32000, -32000 to 32000, Conversion speed: 40µs/2 channels, 18-point terminal block, Dual channel isolation |
| | Analog output | L60DA4 4 channels, Input (resolution): 0 to 20000, -20000 to 20000, Output: -10 to 10V DC, 0 to 20mA DC, Conversion speed: 20µs/channel, 18-point terminal block |
| | Analog I/O | L60AD2DA2 Input specifications : 2 channels, Input: -10 to 10V DC, 0 to 20mA DC, Output (resolution): 0 to 12000, -16000 to 16000, Conversion speed: 80µs/channel, Output specifications : 2 channels, Input (resolution): 0 to 12000, -16000 to 16000, Output: -10 to 10V DC, 0 to 20mA DC, Conversion speed: 80µs/channel, 18-point terminal block |
| Temperature Control module | Thermocouple | L60TCTT4 4 channels (normal mode) /2 channels (heating-cooling control), Thermocouple (K,J,T,B,S,E,R,N,U,L,PL II ,W5Re/W26Re), No Heater disconnection detection function, sampling cycle: 250ms/4 channels, 500ms/4 channels, Channel isolated, 18 point terminal block |
| | | L60TCTT4BW 4 channels (normal mode) /2 channels (heating-cooling control), Thermocouple (K,J,T,B,S,E,R,N,U,L,PL II ,W5Re/W26Re), Heater disconnection detection function, sampling cycle: 250ms/4 channels, 500ms/4 channels, Channel isolated, 18 point terminal block x2 |
| | RTD | L60TCRT4 4 channels (normal mode) /2 channels (heating-cooling control), Platinum type resistive temperature device(Pt100, JPt100), No Heater disconnection detection function, Sampling cycle: 250ms/4 channels, 500ms/4 channels, Channel isolated, 18 point terminal block |
| | | L60TCRT4BW 4 channels (normal mode) /2 channels (heating-cooling control), Platinum type resistive temperature device(Pt100, JPt100), Heater disconnection detection function, Sampling cycle: 250ms/4 channels, 500ms/4 channels, Channel isolated, 18 point terminal block x2 |
| Simple motion module | SSCNET III/H | LD77MS2 2 axes, 2-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET III/H connectivity |
| | | LD77MS4 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET III/H connectivity |
| | | LD77MS16 16 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET III/H connectivity |
| | SSCNET III | LD77MH4 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET III connectivity |
| | | LD77MH16 16 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, synchronous control, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, SSCNET III connectivity |
| | | |
| Positioning module | Open collector | LD75P1 1 axis, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 200kpps, 40-pin connector |
| | | LD75P2 2 axes, 2-axis linear interpolation, 2-axis circular interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 200kpps, 40-pin connector |
| | | LD75P4 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 200kpps, 40-pin connector x2 |
| | Differential driver | LD75D1 1 axis, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 4Mpps, 40-pin connector |
| | | LD75D2 2 axes, 2-axis linear interpolation, 2-axis circular interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 4Mpps, 40-pin connector |
| | | LD75D4 4 axes, 2-/3-/4-axis linear interpolation, 2-axis circular interpolation, Control unit: mm, inch, degree, pulse, Number of positioning data: 600 data/axis, Maximum output pulse: 4Mpps, 40-pin connector x2 |
| High-speed counter module | LD62 2 channels, 200/100/10kpps, Count input signal: 5/12/24V DC, External input: 5/12/24V DC, Coincidence output: transistor (sink), 12/24V DC, 0.5A/point, 2A/common, 40-pin connector | |
| | LD62D 2 channels, 500/200/100/10kpps, Count input signal: EIA standards RS-422-A (Differential line driver level), External input: 5/12/24V DC, Coincidence output: transistor (sink), 12/24V DC, 0.5A/point, 2A/common, 40-pin connector | |
| Network module | CC-Link IE Field Network | LJ71GF11-T2 Master/Local station |
| | | LJ72GF15-T2*1 Remote station (Head module with END cover) |
| | CC-Link | LJ61BT11 Master/Local station, CC-Link Ver.2.0 compatible |
| | CC-Link/LT | LJ61CL12 Master station, CC-Link/LT system compatible |
| | SSCNET III/H | LJ72MS15*2 Remote station (Head module with END cover) |
| | Ethernet interface | LJ71E71-100 10BASE-T/100BASE-TX BACnet™ client function, MODBUS® TCP master function (using predefined protocol support function) |
| | Serial communication | LJ71C24 RS-232: 1 channel, RS-422/485: 1 channel, Total transmission speed of 2 channels: 230.4kbps MODBUS® RTU master function (using predefined protocol support function) |
| LJ71C24-R2 RS-232: 2 channels, Total transmission speed of 2 channels: 230.4kbps MODBUS® RTU master function (using predefined protocol support function) | | |

*1: The CPU module, branch and extension module, display unit, RS-232 adaptor, CC-Link IE Field Network master/local module and Ethernet interface module cannot be mounted on a system using LJ72GF-T2.
*2: The CPU module, branch and extension module, display unit, RS-232 adaptor, temperature control module, simple motion module, positioning module, CC-Link IE Field Network master/local module, CC-Link IE Field network head module, CC-Link master/local module, CC-Link/LT master module, Ethernet interface module and serial communication module cannot be mounted on a system using LJ72MS15.

Compatible module for each protocol

| Compatible protocol | Compatible module | Model | Outline |
|-----------------------|------------------------------|--|---|
| SLMP (MC protocol) | CPU (Built-in Ethernet) | L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT | SLMP server function (only MC protocol QnA compatible 3E frame) SLMP client function (using predefined protocol support function) |
| | Ethernet interface module | LJ71E71-100 | SLMP server function (including MC protocol) SLMP client function (using predefined protocol support function) |
| BACnet™ | CPU (Built-in Ethernet) | L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT | Compatible BACnet™ object: Analog Input (AI), Binary Input (BI), Binary Output (BO), Accumulator (AC) (using predefined protocol support function) |
| | Ethernet interface module | LJ71E71-100 | |
| MODBUS®/TCP | CPU (Built-in Ethernet) | L02CPU(-P) L06CPU(-P) L26CPU(-P) L26CPU(-P)BT | MODBUS®/TCP communication master function (using predefined protocol support function) |
| | Ethernet interface module | LJ71E71-100 | |
| MODBUS® | CPU (Built-in RS-232) | L02SCPU(-P) | MODBUS®RTU communication master function (using predefined protocol support function) |
| | RS-232 adapter | L6ADP-R2 | |
| | RS-422/485 adapter | L6ADP-R4 | |
| | Serial Communication Modules | LJ71C24(-R2) | |

Options

[Legend] **DB** : Double brand product **NEW** : Recently released product **SOON** : Product available soon

| Type | Model | Outline |
|---|----------------|--|
| Connector | A6CON1*1*2 | Soldering type 32-point connector (40-pin connector) |
| | A6CON2*1*2 | Crimp contact type 32-point connector (40-pin connector) |
| | A6CON3*1*3 | Flat cable pressure welding type 32-point connector (40-pin connector) |
| | A6CON4*1*2 | Soldering type 32-point connector (40-pin connector, cable connectable in bidirection) |
| Connector/terminal block converter module | A6TBXY36*4*5*6 | For positive common type input module and sink type output module (Standard type) |
| | A6TBXY54*4*5*6 | For positive common type input module and sink type output module (2-wire type) |
| | A6TBX70*4*7 | For positive common type input module (3-wire type) |

*1: Available for L02CPU, L02CPU-P, L06CPU, L06CPU-P, L26CPU, L26CPU-P, L26CPU-BT, L26CPU-PBT, LX41C4, LX42C4, LY41NT1P, LY42NT1P, LY41PT1P, LY42PT1P, LH42C4NT1P and LH42C4PT1P.

*2: Available for LD75P1, LD75P2, LD75P4, LD75D1, LD75D2, LD75D4, LD62 and LD62D.

*3: When used with L02CPU, L02CPU-P, L06CPU, L06CPU-P, L26CPU, L26CPU-P, L26CPU-BT, L26CPU-PBT, only when all points are general-purpose I/O.

*4: Available for LX41C4 and LX42C4. (Positive common only)

*5: Available for LY41NT1P, LY42NT1P, LY41PT1P and LY42PT1P.

*6: Available for LH42C4NT1P and LH42C4PT1P. (Input side only when using plus common.)

*7: Available for LH42C4NT1P and LH42C4PT1P. (Input side only when using plus common. Output side is not usable.)

Ethernet related products

[Legend] **DB** : Double brand product **NEW** : Recently released product **SOON** : Product available soon

| Type | Model | Outline |
|---|-------------------------------|--|
| Wireless LAN Adapter | U.S.A. NZ2WL-US*8*9 DB | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards |
| | Europe NZ2WL-EU*8*9 DB | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards |
| | China NZ2WL-CN*8*9 DB | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards |
| | Korea NZ2WL-KR*8*9 DB | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards |
| | Taiwan NZ2WL-TW*8*9 DB | Conforms to IEEE 802.11a, IEEE 802.11b, IEEE 802.11g standards |
| Industrial switching HUB | NZ2EHG-T8 DB | 10Mbps/100Mbps/1Gbps AUTO-MDIX, DIN rail mountable, 8 ports |
| | NZ2EHF-T8 DB | 10Mbps/100Mbps AUTO-MDIX, DIN rail mountable, 8 ports |
| CC-Link IE Field Network Ethernet Adapter | NZ2GF-ETB | 100Mbps/1Gbps compatible station for expanding CC-Link IE Field Networks |

*8: Each product is usable only in the respective country.

*9: Both access points and stations are supported, and can be switched with the settings.

MELSOFT*1 — Programming Tool

[Legend] **DB** : Double brand product **NEW** : Recently released product **SOON** : Product available soon

| Type | Model | Outline |
|------------------|---|---|
| GX Works2 | SW1DNC-GXW2-E | Programmable controller engineering software (Functions integrated software: Programming, simulation, module settings, and monitoring) |
| MELSOFT iQ Works | SW1DNC-IQWK-E (CD-ROM edition) SW1DND-IQWK-E (DVD-ROM edition) | FA engineering software*2 <ul style="list-style-type: none"> • System Management Software: MELSOFT Navigator MELSOFT Navigator is a comprehensive system configuration solution that serves as a launching pad for the other software packages. • Controller Programming Software: MELSOFT GX Works2 The next generation configuration, programming, and simulation software for FX, L, and Q series controllers. • Motion Programming Software: MELSOFT MT Works2 Design and maintenance tool for motion controllers. • HMI Programming Software: MELSOFT GT Works3 GOT configuration, screen design, and maintenance tool. • Robot Programming Software: MELSOFT RT ToolBox2 mini Programming and total engineering tool for robots |
| MX Component | SW4DNC-ACT-E | ActiveX® library for communication |
| MX Sheet *3 | SW2DNC-SHEET-E | Excel® communication support tool |

*1: For details on the software versions compatible with each module, refer to the manual for each product.

Please contact your local Mitsubishi Electric sales office or representative for the latest information about MELSOFT software versions and compatible operating systems.

*2: For detailed information about supported modules, refer to the manuals of the relevant software package.

*3: MX Component is required to use MX Sheet.

FA Products

HMI

Graphic Operation Terminal GOT2000 Series GT27 Model



To the top of HMIs with further user-friendly, satisfactory standard features.

- ◎ Comfortable screen operation even if high-load processing (e.g. logging, device data transfer) is running. (Monitoring performance is twice faster than GT16)
- ◎ Actual usable space without using an SD card is expanded to 128MB for more flexible screen design.
- ◎ Multi-touch features, two-point press, and scroll operations for more user-friendliness.
- ◎ Outline font and PNG images for clear, beautiful screen display.

Product Specifications

| | |
|----------------------------|--|
| Screen size | 12.1", 10.4", 8.4" (15" coming soon) |
| Resolution | SVGA, VGA (XGA coming soon) |
| Intensity adjustment | 32-step adjustment |
| Touch panel type | Analog resistive film |
| Built-in interface | RS-232, RS-422/485, Ethernet, USB, SD card |
| Applicable software | GT Works3 |
| Input power supply voltage | 100 to 240VAC (+10%, -15%), 24VDC (+25%, -20%) |

Inverter

FR-A800 Series



High-functionality, high-performance inverter

- ◎ Realize even higher responsiveness during real sensor-less vector control or vector control, and achieve faster operating frequencies.
- ◎ The latest automatic tuning function supports various induction motors and also sensor-less PM motors.
- ◎ The standard model is compatible with EU Safety Standards STO (PLd, SIL2). Add options to support higher level safety standards.
- ◎ A variety of useful functions provide USB memory support and customization with a PLC function.

Product Specifications

| | |
|--|--|
| Inverter capacity | 200V class: 0.4kW to 90kW, 400V class: 0.4kW to 500kW |
| Control method | High-carrier frequency PWM control (Select from V/F, advanced flux vector, real sensor-less vector or PM sensor-less vector control), vector control (when using options) |
| Output frequency range | 0.2 to 590Hz (when using V/F control or advanced flux vector control) |
| Regenerative braking torque (Maximum tolerable usage rate) | 200V class: 0.4K to 1.5K (150% at 3%ED) 2.2K/3.7K (100% at 3%ED) 5.5K/7.5K (100% at 2%ED) 11K to 55K (20% continuous) 75K or more (10% continuous), 400V class: 0.4K to 7.5K (100% at 2%ED) 11K to 55K (20% continuous) 75K or more (10% continuous) |
| Starting torque | 200% 0.3Hz (3.7K or less), 150% 0.3Hz (5.5K or more) (when using real sensor-less vector, vector control) |

AC Servo

Mitsubishi General-Purpose AC Servo MELSERVO-J4 Series



Industry-leading level of high performance servo

- ◎ Industry-leading level of basic performance: Speed frequency response (2.5kHz), 4,000,000 (4,194,304p/rev) encoder
- ◎ Advanced one-touch tuning function achieves the one-touch adjustment of advanced vibration suppression control II, etc.
- ◎ Equipped with large capacity drive recorder and machine diagnosis function for easy maintenance.
- ◎ 2-axis and 3-axis servo amplifiers are available for energy-conservative, space-saving, and low-cost machines.

Product Specifications

| | |
|-----------------------------|---|
| Power supply specifications | 1-phase/3-phase 200V AC, 3-phase 400V AC |
| Command interface | SSCNET III/H, SSCNET III (compatible in J3 compatibility mode), CC-Link IE Field Network interface with Motion, pulse train, analog |
| Control mode | Position/Speed/Torque/Fully closed loop |
| Speed frequency response | 2.5kHz |
| Tuning function | Advanced one-touch tuning, advanced vibration suppression control II, robust filter, etc. |
| Safety function | STO, SS1 |
| | SS2, SOS, SLS, SBC, SSM (compatible when combined with motion controller) |
| Compatible servo motor | Rotary servo motor (rated output: 0.05 to 22kW), linear servo motor (continuous thrust 50 to 3000N), direct drive motor (rated torque: 2 to 240N·m) |

Magnetic Starter

MS-T Series



Exceed your expectations.

- ◎10A frame model is over 16% smaller with a width of just 36mm!!
- ◎New integrated terminal covers.
- ◎Reduce your coil inventory by up to 50%.
- ◎Be certified to the highest international levels while work is ongoing to gain other country.

Product specifications

| | |
|-----------------------|---|
| Frame | 10 A to 32 A |
| Applicable standards | Certification to various standards including IEC, JIS, CE, UL, TÜV, CCC. |
| Terminal cover | Standard terminal cover improves safety, simplifies ordering, and reduces inventory, etc. |
| Improved wiring | Wiring and operability are improved with streamlining wiring terminal BC specifications. |
| Operation coil rating | Wide range of operation coil ratings reduces number of coil types from 14 (N Series) to 7 types and simplifies selection. |
| Option units | Diverse lineup includes Auxiliary Contact Block, Operation Coil Surge Absorber Unit, Mechanical Interlock Unit. |

Low Voltage Circuit Breakers

Mitsubishi WS-V Series Molded Case Circuit Breakers, Earth Leakage Circuit Breakers



Technologies based on long year experience realize more improved performance.

- ◎The new electronic circuit breakers can display various measurement items.
- ◎Improvement of breaking performance with new breaking technology “Expanded ISTAC”.
- ◎Compliance with global standard for panel and machine export.
- ◎Commoditization of internal accessories for shorter delivery time and stock reduction.

Product Specifications.

| | |
|---|--|
| Frame | 32-250A Frame |
| Applicable standard | Applicable to IEC, GB, UL, CSA, JIS and etc. |
| Expansion of UL listed product line-up | New line-up of 480VAC type with high breaking performance for SCCR requirement |
| Commoditization of internal accessories | Reduction of internal accessory types from 3 to 1 |
| Commoditization for AC and DC circuit use | Common use of 32/63A frame in both AC and DC circuit |
| Compact size for easy to use | Thermal adjustable and electronic circuit breakers are same size as 250AF fixed type |
| Measuring Display Unit (MDU) breakers | MDU breakers measure, display and transmit energy date to realize energy management. |

Robot

MELFA F Series



High speed, high precision and high reliability industrial robot

- ◎Compact body and slim arm design, allowing operating area to be expanded and load capacity increased.
- ◎The fastest in its class using high performance motors and unique driver control technology.
- ◎Improved flexibility for robot layout design considerations.
- ◎Optimal motor control tuning set automatically based on operating position, posture, and load conditions.

Product Specifications

| | |
|-----------------------|---|
| Degrees of freedom | Vertical:6 Horizontal:4 |
| Installation | Vertical:Floor-mount, ceiling mount, wall mount (Range of motion for J1 is limited) Horizontal:Floor-mount |
| Maximum load capacity | Vertical:2-20kg Horizontal:3-20kg |
| Maximum reach radius | Vertical:504-1503mm Horizontal:350-1,000mm |

A global standard model that offers both high speed and accuracy.

- ◎Permits commands in 0.1 μ m increments and internal interpolation control in 1nm increments for smooth, high-accuracy machining.
- ◎Intuitive operation and display of hierarchical screens, with an Ethernet I/F (standard feature) for easy program management.
- ◎Offers a more compact control panel by integrating the display and control.
- ◎A lineup that includes Type A for compound lathes, and Type B for tapping centers.



Product specifications

| | |
|--|--|
| Maximum number of control axes (NC axes + spindles + PLC axes) | Type A: 11 axes Type B: 9 axes |
| Maximum number of part systems | Type A: 2 systems Type B: 1 system |
| Least command increment | 0.1 μ m |
| Least control increment | 1nm |
| Maximum program capacity | Type A: 2,000 KB (5,120 m) Type B: 500 KB (1,280 m) |
| Maximum PLC program capacity | Type A: 32,000 steps Type B: 20,000 steps |
| Main functions (for machining center) | OMR-DD control (high-speed synchronous tapping), High-speed & high-accuracy control, Tool center point control, Inclined surface machining, etc. |
| Main functions (for lathes) | Milling interpolation, 2-system simultaneous thread cutting, Control axis synchronization across part systems, Control axis superimposition, Mixed control, etc. |


MEMO

A series of horizontal dashed lines for writing, spanning the width of the page.

Microsoft, Windows, Windows Vista are registered trademarks of Microsoft Corporation in the United States and other countries.
Ethernet is a trademark of Xerox Corporation.
SD/SDHC logo are trademarks.
Modbus is a registered trademark of Schneider Electric USA, Inc.
BACnet is a trademark of ASHRAE Standards Committee.
Cognex, In-Sight, DataMan, VisionView and UltraLight are registered trademarks of the Cognex corporation.
1DMax+, 2DMax+ and HOTBARS are trademarks of the Cognex corporation.
All other company names and product names used in this document are trademarks or registered trademarks of their respective companies.

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO14001 (standards for environmental management systems) and ISO9001 (standards for quality assurance management systems)

CC-Link **CC-Link IE**

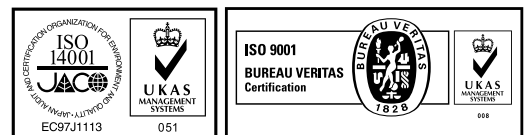

Mitsubishi Electric Programmable Controllers

Precautions before use

This publication explains the typical features and functions of the products herein and does not provide restrictions and other information related to usage and module combinations. Before using the products, always read the product user manuals. Mitsubishi Electric will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric; opportunity loss or lost profits caused by faults in Mitsubishi Electric products; damage, secondary damage, or accident compensation, whether foreseeable or not, caused by special factors; damage to products other than Mitsubishi Electric products; and to other duties.

For safe use

- To use the products given in this publication properly, always read the relevant manuals before use.
- The products have been manufactured as general-purpose parts for general industries, and have not been designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger movement vehicles, consult with Mitsubishi.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

| Country/Region | Sales office | Tel/Fax |
|----------------|---|---|
| USA | Mitsubishi Electric Automation Inc. 500 Corporate Woods Parkway, Vernon Hills, IL 60061, USA | Tel : +1-847-478-2100 Fax : +1-847-478-2253 |
| Mexico | Mitsubishi Electric Automation Inc. Mexico Branch Mariano Escobedo #69, Col.Zona Industrial, Tlalnepantla Edo, C.P.54030, México | Tel : +52-55-9171-7600 Fax : +52-55-9171-7649 |
| Brazil | Mitsubishi Electric do Brasil Comércio e Serviços Ltda. Rua Jussara, 1750- Bloco B Anexo, Jardim Santa Cecilia, CEP 06465-070, Barueri, San Paulo, Brazil | Tel : +55-11-4689-3000 Fax : +55-11-4689-3016 |
| Germany | Mitsubishi Electric Europe B.V. German Branch Gothaer Strasse 8, D-40880 Ratingen, Germany | Tel : +49-2102-486-0 Fax : +49-2102-486-1120 |
| UK | Mitsubishi Electric Europe B.V. UK Branch Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, U.K. | Tel : +44-1707-28-8780 Fax : +44-1707-27-8695 |
| Italy | Mitsubishi Electric Europe B.V. Italian Branch Centro Direzionale Colleoni - Palazzo Sirio Viale Colleoni 7, 20864 Agrate Brianza(Milano) Italy | Tel : +39-039-60531 Fax : +39-039-6053-312 |
| Spain | Mitsubishi Electric Europe B.V. Spanish Branch Carretera de Rubí 76-80-AC.420, E-08190 Sant Cugat del Vallés (Barcelona), Spain | Tel : +34-93-565-3131 Fax : +34-93-589-1579 |
| France | Mitsubishi Electric Europe B.V. French Branch 25, Boulevard des Bouvets, F-92741 Nanterre Cedex, France | Tel : +33-1-5568-5568 Fax : +33-1-5568-5757 |
| Czech Republic | Mitsubishi Electric Europe B.V. Czech Branch Avenir Business Park, Radicka 751/113e, 158 00 Praha5, Czech Republic | Tel : +420-251-551-470 Fax : +420-251-551-471 |
| Poland | Mitsubishi Electric Europe B.V. Polish Branch 32-083 Balice ul. Krakowska 50, Poland | Tel : +48-12-630-47-00 Fax : +48-12-630-47-01 |
| Russia | Mitsubishi Electric Europe B.V. Russian Branch St. Petersburg office Piskarevsky pr. 2, bld 2, lit "Sch", BC "Benua", office 720; 195027, St. Petersburg, Russia | Tel : +7-812-633-3497 Fax : +7-812-633-3499 |
| Turkey | Mitsubishi Electric Turkey A.Ş Ümraniye Branch Serifali Mahallesi Nutuk Sokak No:5 TR-34775 Umraniye, Istanbul, Turkey | Tel : +90-216-526-3990 Fax : +90 -216-526-3995 |
| South Africa | CBI-Electric. Private Bag 2016, ZA-1600 Isando, South Africa | Tel : +27-11-977-0770 Fax : +27-11-977-0761 |
| China | Mitsubishi Electric Automation (China) Ltd. No.1386 Hongqiao Road, Mitsubishi Electric Automation Center, Changning District, Shanghai, China | Tel : +86-21-2322-3030 Fax : +86-21-2322-3000 |
| Taiwan | Setsuyo Enterprise Co., Ltd. 6F., No.105, Wugong 3rd Road, Wugu District, New Taipei City 24889, Taiwan, R.O.C. | Tel : +886-2-2299-2499 Fax : +886-2-2299-2509 |
| Korea | Mitsubishi Electric Automation Korea Co., Ltd. 1480-6, Gayang-Dong, Gangseo-Gu, Seoul, 157-200, Korea | Tel : +82-2-3660-9530 Fax : +82-2-3664-8372 |
| Singapore | Mitsubishi Electric Asia Pte. Ltd. 307, Alexandra Road, Mitsubishi Electric Building, Singapore, 159943 | Tel : +65-6470-2308 Fax : +65-6476-7439 |
| Thailand | Mitsubishi Electric Factory Automation (Thailand) Co., Ltd. 12th Floor, SV.City Building, Office Tower 1, No. 896/19 and 20 Rama 3 Road, Kwaeng Bangpongpan, Khet Yannawa, Bangkok 10120, Thailand | Tel : +66-2682-6522 Fax : +66-2682-6020 |
| Vietnam | Mitsubishi Electric Vietnam Company Limited Hanoi Branch Suite 9-05, 9th Floor, Hanoi Central Office Building 44B Ly Thuong Kiet District, Hanoi City, Vietnam | Tel : +84-4-3937-8075 Fax : +84-4-3937-8076 |
| Indonesia | PT. Mitsubishi Electric Indonesia Gedung Jaya 11th Floor, JL. MH. Thamrin No.12, Jakarta Pusat 10340, Indonesia | Tel : +62-21-3192-6461 Fax : +62-21-3192-3942 |
| India | Mitsubishi Electric India Pvt. Ltd. Emerald House, EL-3, J Block, M.I.D.C., Bhosari, Pune, 411026, Maharashtra State, India | Tel : +91-20-2710-2000 Fax : +91-20-2710-2100 |
| Australia | Mitsubishi Electric Australia Pty. Ltd. 348 Victoria Road, P.O. Box 11, Rydalmere, N.S.W 2116, Australia | Tel : +61-2-9684-7777 Fax : +61-2-9684-7245 |

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BUILDING, 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
NAGOYA WORKS: 1-14, YADA-MINAMI 5, HIGASHI-KU, NAGOYA, JAPAN