

# 2CH with encoder



<b>TYPICAL APPLICATIONS</b>	Electronic and electrical function selector
<b>WIRING DIAGRAMS</b>	■ On demand
<b>CYCLE No.</b>	30.000
<b>AMBIENT TEMPERATURE</b>	85 °C
<b>ADDITIONAL FEATURES</b>	■ Solution combining selector and encoder functions, that allows to improve flexibility and compactness


Solution combining selector and encoder functions, that allows to improve flexibility and compactness.

## Rating

16 (6) A / 250 VAC  
 10 (2) A / 400 VAC  
 18 A / 250 VAC  
 6 (4) A / 250 VAC  
 T 150 °C

3/4 HP / 125 VAC  
 16 A / 250 VAC  
 13.8 A / 250 VAC  
 T 85 °C

According to EN61058-1 standard

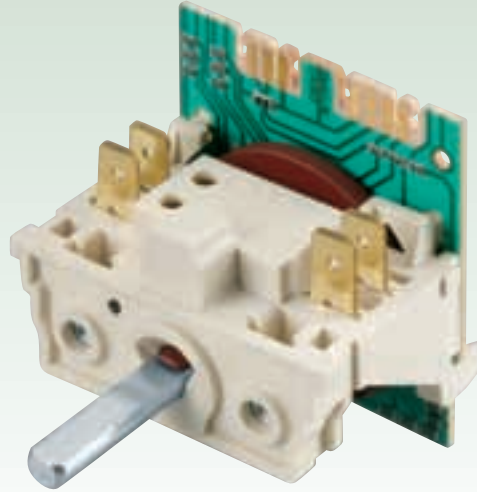

## DIMENSIONS

