DOOR AND FRAME SCHEDULE

NO.	ROOM	Style	SIZE-PR WxH	DOOR MAT.	DOOR FIN.	HARDWARE	Fire Rating	NOTES
101A	SHOW FLOOR	Hinged - Double - Full Lite	PR 3'-0" x 6'-8"	ALUM	CA	01	-	2, 3
101B	SHOW FLOOR	Hinged - Single - Full Lite	3'-0" x 6'-8"	ALUM	CA	17	-	3
110A	CONFERENCE ROOM	Hinged - Single	3'-0" x 6'-8"	-	PL-1	04	-	-
111A	OFFICE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	06	-	-
112A	OFFICE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	06	-	-
113A	STORAGE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	02	-	-
114A	MEN RR	Hinged - Single	3'-0" x 6'-8"	-	PL-1	03	-	4
115A	WOMEN RR	Hinged - Single	3'-0" x 6'-8"	-	PL-1	03	-	4
116A	BREAK ROOM	Hinged - Single	3'-0" x 6'-8"	-	PL-1	04	-	-
118A	RR	Hinged - Single	3'-0" x 6'-8"	-	PL-1	03	-	-
120A	HALLWAY	Hinged - Double - Vision Lite	PR 4'-0" x 7'-10"	HM	PNT	05	3-HOUR	-
121A	PARTS OFFICE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	06	-	-
122A	OFFICE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	06	-	-
123A	OFFICE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	06	-	-
123B	OFFICE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	06	-	-
130A	SALES	Cased Opening	3'-0" x 4'-0"	-	-	-	-	-
131A	SALES	Cased Opening	3'-0" x 4'-0"	-	-	-	-	-
140A	PARTS STORAGE	Hinged - Single - Vision Lite	4'-0" x 7'-0"	HM	PNT	08	3-HOUR	5
140B	PARTS STORAGE	Hinged - Single - Vision Lite	3'-0" x 6'-8"	HM	PNT	09	-	-
140C	PARTS STORAGE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	10	-	-
140D	PARTS STORAGE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	10	-	-
160A	RETAIL STORAGE	Hinged - Single	3'-0" x 6'-8"	-	PL-1	11	-	-
191F	MEZZANINE	Hinged - Double	PR 3'-0" x 7'-0"	HM	PNT	13	3-HOUR	5
191G	MEZZANINE	Hinged - Single	2'-10" x 7'-0"	HM	PNT	15	3-HOUR	5
192B	MECHANICAL	Hinged - Single	3'-0" x 6'-8"	HM	PNT	12	-	-
200A	REPAIR SHOP	Hinged - Single - Vision Lite	3'-0" x 6'-8"	HM	PNT	14	-	-
200B	REPAIR SHOP	Hinged - Single - Vision Lite	3'-0" x 6'-8"	HM	PNT	14	-	-
200C	REPAIR SHOP	Overhead - Sectional	16'-0" x 14'-0"	STL	PNT	-	-	1
200D	REPAIR SHOP	Overhead - Sectional	16'-0" x 14'-0"	STL	PNT	-	-	1
200E	REPAIR SHOP	Hinged - Single - Vision Lite	3'-0" x 7'-0"	HM	PNT	15	3-HOUR	5
202A	TOOL SHARPENING	Cased Opening	3'-0" x 6'-8"	HM	PNT	-	-	-
300A	OUTDOOR STORAGE	Pocket - Single (2)	PR 9'-0" x 8'-0"	STL	PNT	-	-	-
400A	WAREHOUSE	Hinged - Single - Vision Lite	3'-0" x 6'-8"	HM	PNT	14	-	-
400B	WAREHOUSE	Overhead - Sectional	16'-0" x 14'-0"	STL	PNT	-	-	1

NOTES AND REMARKS

1. PROVIDE 3 VISION LITES
2. REFER TO EXTERIOR ELEVATION SHEET A-201 FOR STOREFRONT ASSEMBLY LAYOUT
3. PROVIDE READILY VISIBLE DURABLE SIGN ON THE EGRESS SIDE OF THE DOOR STATING "THIS DOOR ITO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED."
4. PROVIDE RESTROOM SIGNAGE IN ACCORDANCE WITH ANSI A117.1 SECTION 604.3.
5. PROVIDE 4" HIGH HOLLOW METAL FRAME HEAD - MATCH BLOCK COURSING

ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLR	Base	WALL FINISH AND TYPE NORTH	SOUTH	EAST	WEST	MATL	Height	NOTES
101	SHOW FLOOR	CONC #1	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	ACT #1	14'-0"	--
110	CONFERENCE ROOM	CARPET #1	VINYL #1	WC	WC	WC	WC	ACT #1	8'-6"	--
111	OFFICE	CARPET #1	VINYL #1	WC	WC	WC	WC	ACT #1	8'-6"	--
112	OFFICE	CARPET #1	VINYL #1	WC	WC	WC	WC	ACT #1	8'-6"	--
113	STORAGE	CARPET #1	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	ACT #1	8'-6"	--
114	MEN RR	VCT	TILE	TILE	TILE	TILE	TILE	ACT #1	8'-0"	--
115	WOMEN RR	VCT	TILE	TILE	TILE	TILE	TILE	ACT #1	8'-0"	--
116	BREAK ROOM	VCT	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT CMU #1	ACT #1	8'-6"	--
117	LOCKER ROOM	VCT	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT CMU #1	ACT #1	8'-6"	--
118	RR	VCT	TILE	TILE	TILE	TILE	TILE	ACT #1	8'-0"	--
120	HALLWAY	CONC #1	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	ACT #1	8'-6"	--
121	PARTS OFFICE	CARPET #1	VINYL #1	WC	WC	WC	WC	ACT #1	8'-6"	--
122	OFFICE	CARPET #1	VINYL #1	WC	WC	WC	WC	ACT #1	8'-6"	--
123	OFFICE	CARPET #1	VINYL #1	WC	WC	WC	WC	ACT #1	8'-6"	--
130	SALES	CONC #1	VINYL #1	WC	WC	WC	WC	ACT #1	14'-0"	--
131	SALES	CONC #1	VINYL #1	WC	WC	WC	WC	ACT #1	14'-0"	--
135	SALES COUNTER	CONC #1	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	9'-0"	--
140	PARTS STORAGE	CONC #2	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT EXP	17'-0"	--
160	RETAIL STORAGE	CONC #2	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT EXP	17'-0"	--
190	STAIRS UP	PNT WD #1	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	ACT #1	17'-0"	--
191	MEZZANINE	VCT	VINYL #1	VINYL #1	VINYL #1	VINYL #1	VINYL #1	PNT EXP	8'-6"	--
192	MECHANICAL	VCT	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT EXP	8'-6"	--
193	STORAGE	VCT	VINYL #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	PNT GYP #1	ACT #1	8'-6"	--
200	REPAIR SHOP	CONC #2	LNR PNL	LNR PNL	LNR PNL	LNR PNL	LNR PNL	PNT EXP	15'-0"	--
202	TOOL SHARPENING	CONC #2	LNR PNL	LNR PNL	LNR PNL	LNR PNL	LNR PNL	PNT EXP	8'-6"	--
300	OUTDOOR STORAGE	CONC #3	--	--	--	--	--	--	0"	--
400	WAREHOUSE	CONC #2	LNR PNL	LNR PNL	LNR PNL	LNR PNL	LNR PNL	PNT EXP	16'-0"	--

Hardware Sets

SET #01 - Alum Dr

Doors: 101A

2 Continuous Hinge	MCK-12HD 79	CLEAR	MC
1 Exit Device	10 16 8410 F	32D	SA
1 Exit Device	10 16 8410 F 106 LESS PULL	32D	SA
2 Pull	OP9016 3/8" N FASTENER	US32D	MCKI
2 Closer	1431 OZ	EN	SA
2 Mounting Plate	1431-B	EN	SA
2 Overhead Holder	598H	26D	SA
2 Door Sweep	18061 CNB 36" TEK SCREWS		PE
1 Threshold	252 X 3 AFG 76"		PE

NOTE: Perimeter weatherstrip furnished by alum. frame supplier.

SET #02

Doors: 113A

3 Hinges	TA2714 4 1/2 X 4 1/2 NRP	26D	MC
1 Strm Lock	10 8204 LNJ	26D	SA
1 Closer	1431 P9	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Wall Stop	WS01	US32D	MC

SET #03

Doors: 114A, 115A, 118A

3 Hinges	TA2714 4 1/2 X 4 1/2	26D	MC
1 Privacy Set w/Occu. Ind.	49 8265 LNJ 26D		SA
1 Overhead Stop	598S	26D	SA

SET #04

Doors: 110A, 116A

3 Hinges	TA2714 4 1/2 X 4 1/2	26D	MC
1 Passage Set	8215 LNJ	26D	SA
1 Wall Stop	WS01	US32D	MC

SET #05

Doors: 120A

2 Continuous Hinge	FM-3500 8'0"	630	MA
2 Exit Device	12 NB MD 8615 G ETJ	32D	SA
1 Closer	1431 P10	EN	SA
1 Closer	1431 CPS	EN	SA
2 Kickplate	KP50 34" x 47" CSK HB4E	US32D	MC
2 Protector Bar	HD2230	US32D	RO
1 Wall Stop	WS01	US32D	MC
1 Gasketing	S88 W 25'		PE
2 Door Sweep	18061 CNB 36" TEK SCREWS		PE
	NOTE: Attach to barely touch floor but not inhibit swing of door.		
2 Astragal	18041 CNB 96" TEK SCREWS		PE

SET #06

Doors: 111A, 112A, 121A, 122A, 123A, 123B

3 Hinges	TA2714 4 1/2 X 4 1/2	26D	MC
1 Office Lock	10 8205 LNJ	26D	SA
1 Wall Stop	WS01	US32D	MC

SET #07

Doors: 130A, 131A

3 Hinges	TA2714 4 1/2 X 4 1/2	26D	MC
1 Passage Set	8215 LNJ	26D	SA
1 Wall Stop	WS01	US32D	MC

SET #08

Doors: 140A

4 Hinges	T4A3786 4 1/2 X 4 1/2	26D	MC
1 Passage Set	8215 LNJ	26D	SA
1 Closer	1431 O	EN	SA
1 Overhead Stop	599S	26D	SA
1 Armor Plates	KP50 34" x 46" CSK HB4E	US32D	MC
1 Gasketing	S88 W 20'		PE
1 Door Sweep	18061 CNB 48" TEK SCREWS		PE
	NOTE: Attach to barely touch floor but not inhibit swing of door.		

SET #09

Doors: 140B

3 Hinges	T4A3386 4 1/2 x 4 1/2 NRP	32D	SA
1 Strm Lock w/Ddbt	10 8251 LNJ	26D	SA
1 Closer w/HO	1431 CPSH	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Gasketing	S88 W 17'		PE
1 Door Sweep	18041 CSB 36" TEK SCREWS		PE
1 Raindrip	346 C 40" TEK SCREWS		PE
1 Weatherstrip	303 CS 1 x 36" 2 x 84" TEK SCREWS		PE
1 Door Sweep w/Raindrip			345 ANB 36"
TEK SCREWS	PE		
1 Threshold	252 X 3 AFG 40"		PE

SET #10

Doors: 140C, 140D

3 Hinges	T4A3786 4 1/2 X 4 1/2	26D	MC
1 Door Pull	DP803	US32D	MC
1 Closer	1431 O	EN	SA
1 Overhead Holder	598H	26D	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Push Plate	P056	US32D	MC

SET #11

Doors: 160A

3 Hinges	TA2714 4 1/2 X 4 1/2	26D	MC
1 Office Lock	10 8205 LNJ	26D	SA
1 Closer	1431 O	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Wall Stop	WS01	US32D	MC

SET #12

Doors: 192A

3 Hinges	TA2714 4 1/2 X 4 1/2 NRP	26D	MC
1 Strm Lock	10 8204 LNJ	26D	SA
1 Closer	1431 P9	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Wall Stop	WS01	US32D	MC

SET #13

Doors: 192F

6 Hinges	TA2714 4 1/2 X 4 1/2 NRP	26D	MC
1 Self Latching Flush Bolt		FB07M TOP BOLT ONLY	
26D MCKI			
1 Strm Lock less LS. Trim		10 8231 LNJ 26D	SA
2 Door Pull	DP07	US32D	MC
	NOTE: Install on inside face of doors.		
1 Closer	1431 P9	EN	SA
2 Wall Stop	WS01	US32D	MC
2 Gasketing	PK 55 W 17'		PE

NOTE: Z type astragal to be furnished by door manf. Removable safety rail or chain to be furnished by contractor.

SET #14

Doors: 200A, 200B, 400A

3 Hinges	T4A3386 4 1/2 x 4 1/2 NRP	32D	SA
1 Entrance Lock w/ddbt	10 8243 LNJ	26D	SA
1 Closer w/HO	1431 CPSH	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Raindrip	346 C 40" TEK SCREWS		PE
1 Weatherstrip	303 CS 1 x 36" 2 x 84" TEK SCREWS		PE
1 Door Sweep w/Raindrip			345 ANB 36"
TEK SCREWS	PE		
1 Threshold	252 X 3 AFG 40"		PE

SET #15

Doors: 200C, 200D, 300A, 400B

NOTE: All hardware furnished by door supplier.

SET #16

Doors: 200E

3 Hinges	T4A3786 4 1/2 X 4 1/2	26D	MC
1 Passage Set	8215 LNJ	26D	SA
1 Closer	1431 CPS	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Gasketing	PK 55 W 17'		PE

SET #17

Doors: 101B

3 Hinges	T4A3386 4 1/2 x 4 1/2 NRP	32D	SA
1 Strm Lock w/Ddbt	10 49-185C 8230 LNJ	26D	SA
1 Closer w/HO	1431 CPSH	EN	SA
1 Kickplate	KP50 10" x 34" CSK HB4E	US32D	MC
1 Gasketing	S88 W 17'		PE
1 Door Sweep	18041 CSB 36" TEK SCREWS		PE
1 Raindrip	346 C 40" TEK SCREWS		PE
1 Weatherstrip	303 CS 1 x 36" 2 x 84" TEK SCREWS		PE
1 Door Sweep w/Raindrip			345 ANB 36"
TEK SCREWS	PE		
1 Threshold	252 X 3 AFG 40"		PE

LEGEND

NA	NOT APPLICABLE
WD	WOOD
STN	STAINED
HM	HOLLOW METAL
PNT	PAINTED
CA	CLEAR ANODIZED
ALUM	ALUMINUM
-	NOT APPLICABLE UNLESS INDICATED ELSEWHERE
VCT	VINYL COMPOSITION TILE MANUFACTURED BY: ARMSTRONG SERIES: "STANDARD EXCELON" IMPERIAL TEXTURE, COLOR: 51804 "EARTHSTONE GREIGE"
PL-1	PLASTIC LAMINATE MANUFACTURED BY: PIONITE COLOR: #W0581-S WISCONSIN OAK TEXTURE: SUEDE
PL-3	PLASTIC LAMINATE MANUFACTURED BY: NEVAMAR COLOR: #PR2002T PAPIER AU LAIT TEXTURE: TEXTURED
PL-4	PLASTIC LAMINATE MANUFACTURED BY: WILSONART COLOR: #4987-07 SMOKY TOPAZ
PNT GYP #1	PAINTED GYPSUM WALL BOARD PAINT MANUFACTURER: BENJAMIN MOORE WALLS UP TO 12'-0": #HC-31 WATERBURY CREAM RESTROOM WALLS: #2018-60 LIGHTHOUSE SOFFIT - SERVICE COUNTER: CUSTOM COLOR - JOHN DEERE GREEN
SG	TEMPERED GLASS , 1/4"
ISG	INSULATED 1" TEMPERED GLASS
GWB	GYPSUM WALL BOARD ASSEMBLY
CB	CEMENTITIOUS WALL BOARD
AL GLAZ	ALUMINUM STOREFRONT OR CURTAIN WALL ASSEMBLY
CRPT	CARPET MANUFACTURED BY: ATLAS SERIES: CORTONA 28 COLOR: CX15 "EARTH TONE"
CONC #1	CONCRETE , POLISHED WITH COLOR
CONC #2	CONCRETE , POLISHED WITH COLOR
CONC #3	CONCRETE , EXTERIOR
LNR PNL	SHEET METAL LINER PANEL
WT	WALL TILE
WC	VINYL WALL COVERING MANUFACTURED BY: MAHARAM SERIES: "TIRAZ" 394502 COLOR: #025 MAIZE"
ACT#1	2' x 2' ACOUSTICAL CEILING TILE AND GRID ASSEMBLY - MANUFACTURED BY: TECTUM SERIES: DESIGNER PLUS 3-D PANELS COLOR: NATURAL
ACT#2	2' x 2' x 5/8" ACOUSTICAL CEILING TILE AND GRID ASSEMBLY - MANUFACTURED BY: USG SERIES: OLYMPIA MICRO, CLIMAPLUS #4230 COLOR: WHITE
ACT#3	2' x 2' x 5/8" ACOUSTICAL CEILING TILE AND GRID ASSEMBLY - MANUFACTURED BY: USG SERIES: OLYMPIA MICRO, CLIMAPLUS #4430 COLOR: WHITE

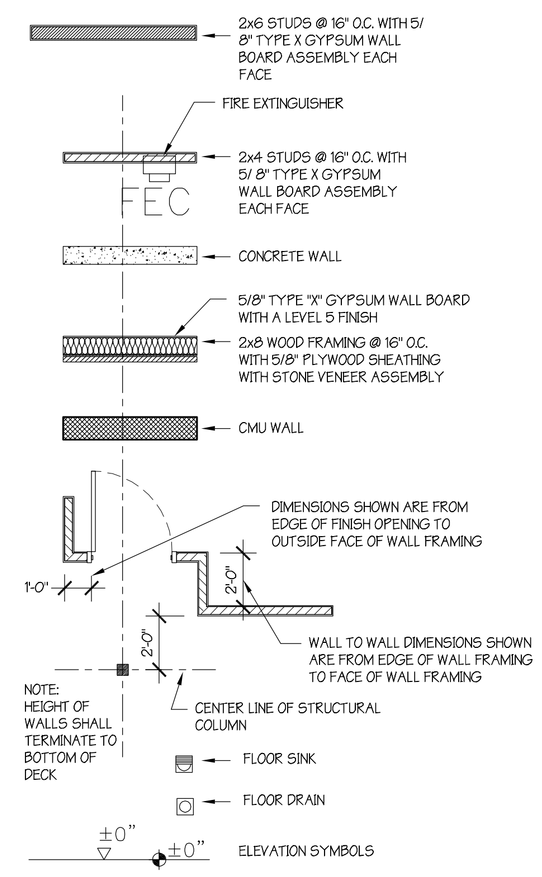

WINDOW SCHEDULE

Quantity	MARK	SIZE WIDTH	SIZE HEIGHT	MATERIAL	Sill Height	TOP OF WINDOW	TYPE	NOTES
3	24	2'-0"	5'-0"	ALUM	3'-0"	8'-0"	Casement	--
2	45	3'-0"	3'-4"	ALUM	3'-4"	6'-8"	Glider	--
3	48	4'-0"	3'-4"	ALUM	3'-4"	6'-8"	Picture	--
1	49	2'-8"	4'-0"	ALUM	3'-4"	7'-4"	Picture	3-HOUR FIRE RATING
1	52	3'-4"	3'-4"	ALUM	3'-4"	6'-8"	Glider	--
4	62	6'-0"	5'-0"	ALUM	3'-0"	8'-0"	Picture	--
1	63	6'-0"	6'-8"	ALUM	2'-4"	9'-0"	3-lite Storefront	--
1	64	6'-0"	6'-8"	ALUM	2'-4"	9'-0"	3-lite Storefront	--
1	65	6'-0"	6'-8"	ALUM	2'-4"	9'-0"	3-lite Storefront	--
1	66	6'-0"	6'-8"	ALUM	2'-4"	9'-0"	3-lite Storefront	--
1	67	6'-8"	9'-0"	ALUM	0"	9'-0"	Hinged Double 6-8 + Transom	--

Architect:

AIA CSI CCS CCCA NCARB LEED AP
Thomas McInerney
MACARCHITECT@MSN.COM
ARCHITECT
1208 MARCY STREET
IOWA CITY, IOWA 52240
319-331-0365

Applicant:

C T PARTNERS LLC
1000 25TH AVE
CORALVILLE, IA 52241

Project :

City Tractor Co.

645 Penn Court
North Liberty, IA

Note: © COPYRIGHT
UNAUTHORIZED COPYING, DISCLOSURE OR CONSTRUCTION WITHOUT WRITTEN PERMISSION BY THOMAS MCINERNEY, ARCHITECT, IS PROHIBITED.

ANY ELECTRICAL AND MECHANICAL ITEMS SHOWN ARE DIAGRAMMATIC AND ARE SHOWN FOR THE LIMITED PURPOSE OF INDICATING LOCATIONS OF REQUIRED FIXTURES. MECHANICAL AND ELECTRICAL CONTRACTORS SHALL PROVIDE DESIGNS IN ACCORDANCE WITH ALL APPLICABLE CODES AND REGULATIONS REQUIRED BY THE AUTHORITY HAVING JURISDICTION. CONTRACTOR SHALL COORDINATE THE INSTALLATION OF NEW SYSTEMS WITH EXISTING SYSTEMS.

Project number: 08.038

Date	Description
2009.07.28	APPLICATION FOR PERMIT
2009.08.14	RESPONSE TO CITY #1
2009.08.17	RESPONSE TO CITY #2

Sheet Title:

openings and finish schedules

Sheet Number:

a-001

PDF created with pdfFactory trial version www.pdffactory.com