

S X ? ?

?

SERIES

CUT OUT

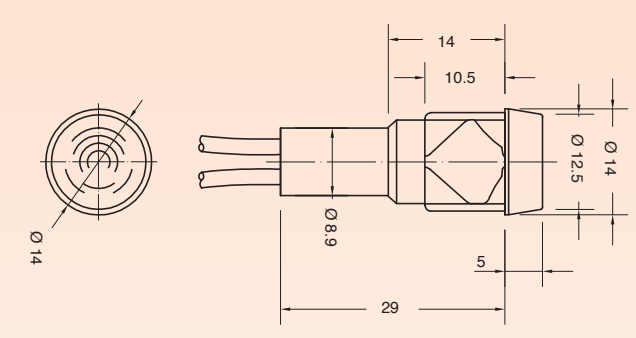
DRAWING

41

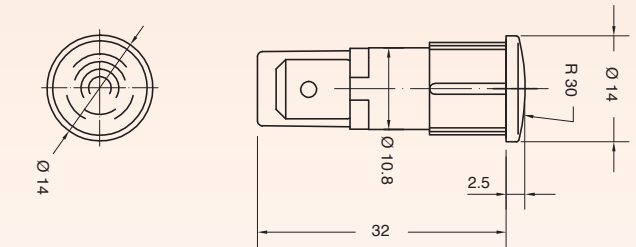



ø 12 mm
th 0.8 ... 2 mm

1


ø 14
14
10.5
Ø 12.5
Ø 14
5
29
Ø 8.9

2

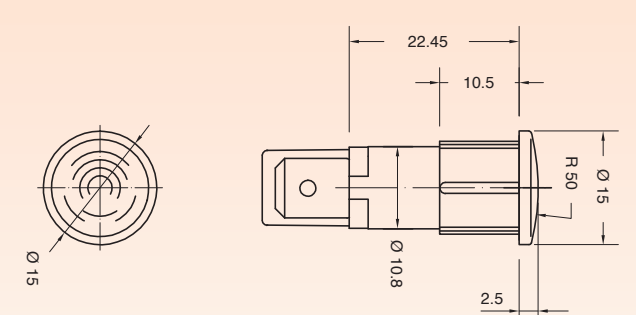

ø 14
R 30
Ø 10.8
2.5
32
Ø 14

43




ø 13 mm
th 0.8 ... 2 mm

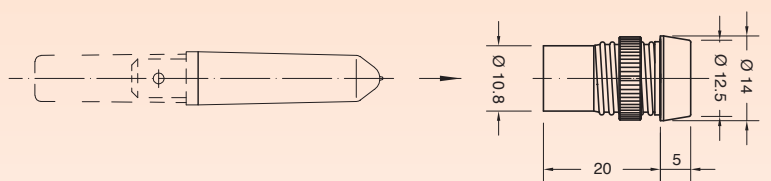
2


ø 15
22.45
10.5
R 50
Ø 10.8
2.5
Ø 15

ACCESSORY LENSES FOR SERIES SX213...

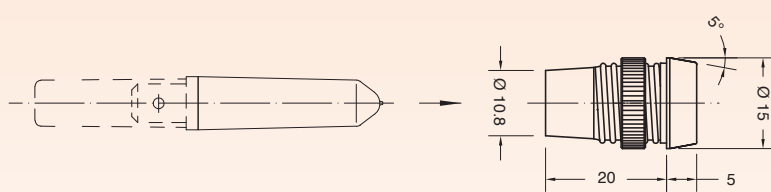
SX21T511...


ø 12 mm
th 0.8 ... 6.5 mm





ø 10.8
Ø 14
Ø 12.5
20
5

SX21T531...


ø 13 mm
th 0.8 ... 6.5 mm


ø 10.8
Ø 15
20
5
5°

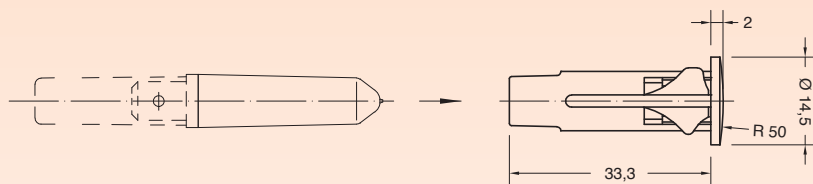
S	X	SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES	0	0

?	?	?	?	?	?	?	?	?	?	0	0
TERMINAL	FUNCTION	VOLTAGE	TEMPERATURE	COLOUR	WIRES	Indicator Lights					
1 Series 41 - 43 Tabs 6.3 x 0.8  R Series 41 Wires sealed 	1  2  3  5  6 Terminal 1  7 Terminal R 	1 Function 5 2 V 2 Function 3 - 5 12 V 3 Function 3 - 5 24 V 4 Function 1 - 2 - 6 - 7 110 V 5 Function 1 - 2 - 6 - 7 125 V 6 Function 1 - 2 - 6 - 7 230 V 7 Function 1 - 2 - 6 - 7 250 V 8 Function 1 - 2 400 V ? VDE or UL certified Available on demand X Custom	A T 75 °C 1 Function 1 - 2 - 3 T 90 °C 2 Function 1 - 2 T 120 °C 3 Function 1 - 2 T 150 °C	ILLUMINATED ✨ G red H orange E green L white X custom ?	000 Terminal 1 - C Indicator light without wires ??? Terminal K - R Indicator light with wires Wires Material: ■ PVC (up to T90 °C) ■ SILICONE (up to T200 °C) Wires Length: ■ from 60 mm to 600 mm (special version available up to 1.450 mm) Wires Ends: ■ pre-stripped (from 5.5 to 18 mm) ■ stripped (from 5.5 to 18 mm) ■ not stripped ■ crimp terminals						

SX21T572...
with antirotation rib

SX21T572...
without antirotation rib


 ø 10.2 mm
 th 0.8 ... 2 mm



SX21T592...


 ø 13 mm
 th 0.5 ... 2.5 mm

