




1-855-358-7825
www.atp4you.net



ATP NA12

- Three grooves provide excellent comfort
- Excellent control performance
- Wide ground contact area improves longer mileage

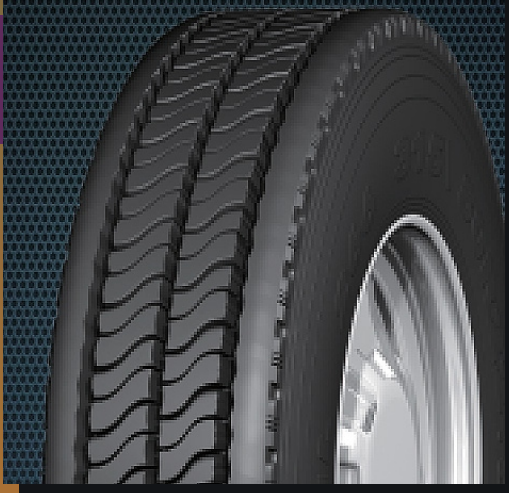

SIZE	RIM	PLY RATING	SPEED SYMBOL	TIRE DIMENSION (mm)		LOAD INDEX		INFLATION PRESSURE SINGLE/DUAL		LOAD CAPACITY SINGLE/DUAL	
				SECTION WIDTH	OVERALL DIAMETER	SINGLE	DUAL	KPA	PSI	KG	LBS
315/80R22.5	9.0	18	L	312	1082	154	151	830	120	3750 / 3450	8270 / 7610
		20	L			156	153	850	125	4000 / 3650	8820 / 8045
12R22.5	9.0	16	L	300	1096	150	147	830	120	3350 / 3075	7390 / 6780
		18	L			152	149	930	135	3550 / 3250	7830 / 7170

Warehouse locations: Los Angeles, Phoenix, Tucson, Grand Prairie, Seattle, Boise



1-855-358-7825
www.atp4you.net



ATP ND06

- Deep tread to resist stone drilling
- Designed for excellent durability and traction
- Improved design for outstanding wear for over-the-road service
- Premium closed shoulder steel radial drive position




SIZE	RIM	PLY RATING	SPEED SYMBOL	TIRE DIMENSION (mm)		LOAD INDEX		INFLATION PRESSURE SINGLE/DUAL		LOAD CAPACITY SINGLE/DUAL	
				SECTION WIDTH	OVERALL DIAMETER	SINGLE	DUAL	KPA	PSI	KG	LBS
11R22.5	8.25	14	M	1065	279	144	142	720	105	2800 / 2575	6175 / 5675
		16	M			146	143	830	120	3000 / 2725	6610 / 6005
11R24.5	8.25	14	M	1116	279	146	143	720	105	3000 / 2725	6610 / 6005
		16	M			149	146	830	120	3250 / 3000	7160 / 6610
285/75R24.5	8.25	14	L/M	1056	283	144	141	760	110	2800 / 2575	6175 / 5675
		16	L/M			146	143	830	120	3000 / 2725	6610 / 6005
295/75R22.5	9.00	14	L/M	1020	298	144	141	760	110	2800 / 2575	6175 / 5675
		16	L/M			146	143	830	120	3000 / 2725	6610 / 6005

Warehouse locations: Los Angeles, Phoenix, Tucson, Grand Prairie, Seattle, Boise



1-855-358-7825
www.atp4you.net

ATP ND20

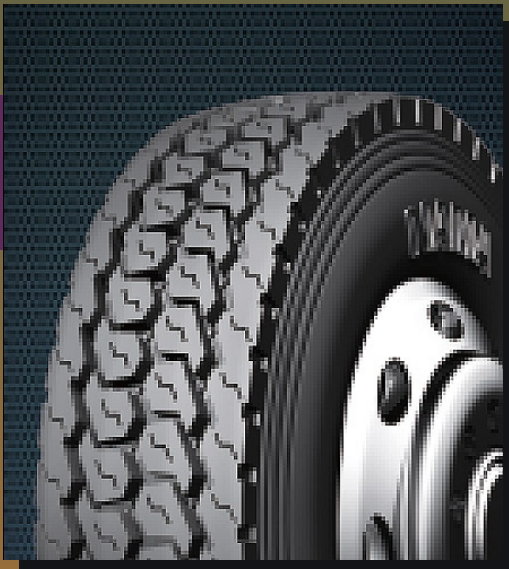

- Mixed pattern with excellent ground grasping and braking performance
- Low-heating, excellent abrasion resistance and energy-efficient
- Applicable to the driving wheels of the truck



SIZE	RIM	PLY RATING	SPEED SYMBOL	TIRE DIMENSION (mm)		LOAD INDEX		INFLATION PRESSURE SINGLE/DUAL		LOAD CAPACITY SINGLE/DUAL	
				SECTION WIDTH	OVERALL DIAMETER	SINGLE	DUAL	KPA	PSI	KG	LBS
11R22.5	8.25	14	M	1065	279	144	142	720	105	2800 / 2575	6175 / 5675
		16	M			146	143	830	120	3000 / 2725	6610 / 6005
11R24.5	8.25	14	M	1116	279	146	143	720	105	3000 / 2725	6610 / 6005
		16	M			149	146	830	120	3250 / 3000	7160 / 6610
285/75R24.5	8.25	14	L	1056	283	144	141	760	110	2800 / 2575	6175 / 5675
		16	L			146	143	830	120	3000 / 2725	6610 / 6005
295/75R22.5	9.00	14	L	1020	298	144	141	760	110	2800 / 2575	6175 / 5675
		16	L			146	143	830	120	3000 / 2725	6610 / 6005

Warehouse locations: Los Angeles, Phoenix, Tucson, Grand Prairie, Seattle, Boise