

# 5HE 7TAKT DUO




<b>TYPICAL APPLICATIONS</b>	Hobs control
<b>WIRING DIAGRAMAS</b>	7 positions
<b>GWFI</b>	850 °C
<b>GWFI</b>	750 °C

This series is composed of two 5HE 7TAKT rotary selectors, 3 different distances of axis available (55, 60 and 65 mm). Each selector has 7 positions, electric rating up to 12A and different mounting solutions. Duo block permits to make the wiring easier.

- Standard connecting with single terminals 6,3 mm
- Different mounting solutions available: snap-in, nuts or central mounting
- Metal or plastic shafts with different lengths
- Rast 6,5 multiple connection available
- Metal or plastic shafts with different lengths:  
(16 - 31 mm)

## EXAMPLE OF 5HE 7TAKT DUO WITH NUTS

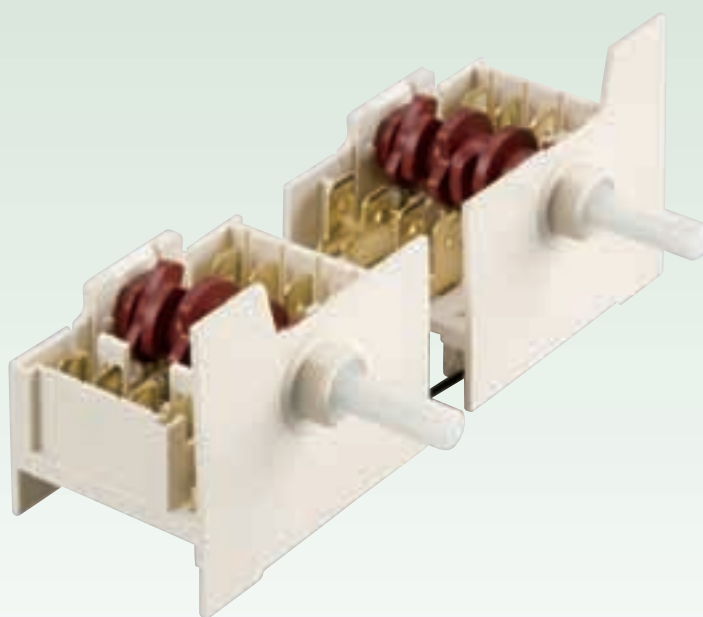


**Rating**  
12 A / 400 VAC 30E3  
T150 °C

16 A / 250 VAC  
T120 °C

According to EN61058-1  
standard


## TECHNICAL FEATURES

Various distances of axis available:  
55, 60 and 65 mm.

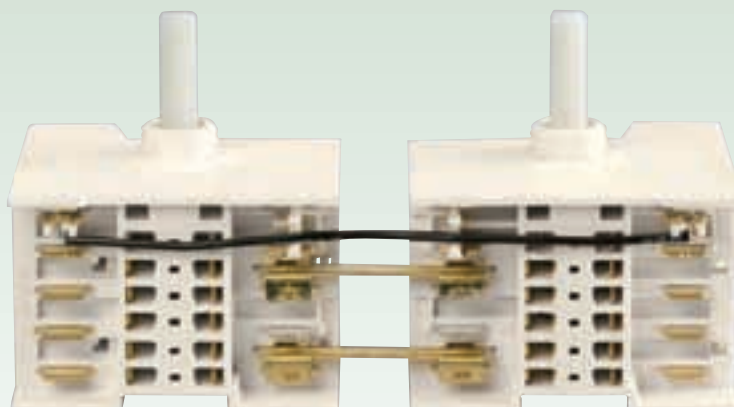


## DIMENSIONS

Screw fixing version

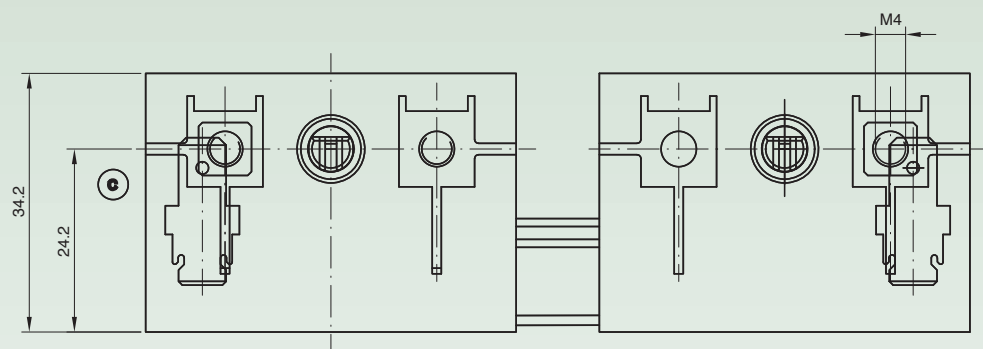

60 mm interaxis version  
(55 and 65 mm available)

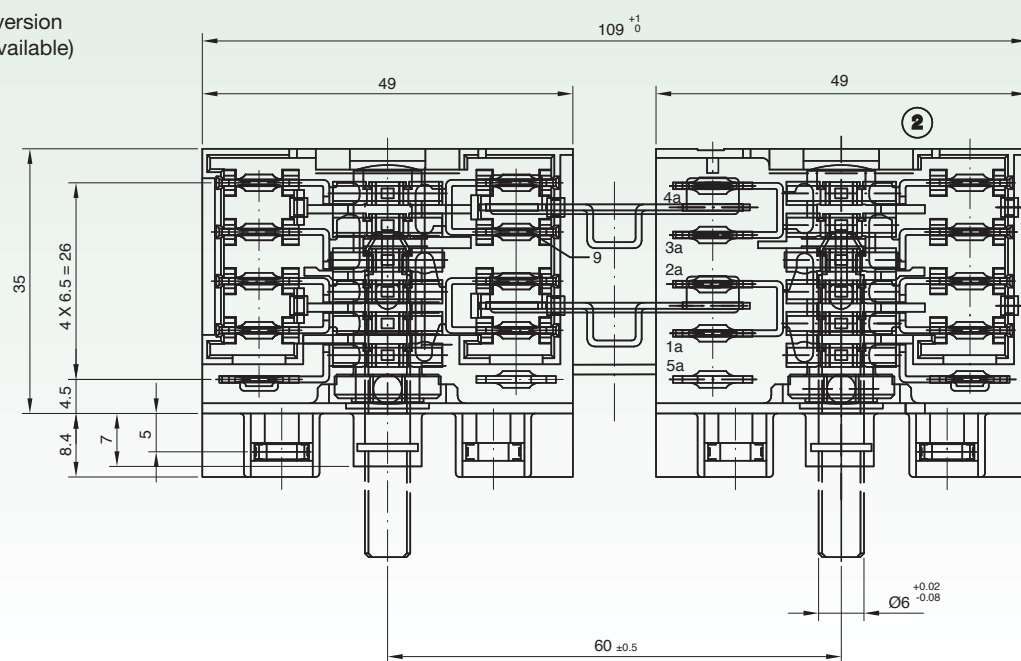

## CONTACT SEQUENCE

		P3	P1		P2	
	Ang.	5a	1a-2a	3a-4a		
Pos.		S	1	2	3-3	4
0	0°					
1	51,4°	■	■	■	■	■
2	102,8°	■		■	■	■
3	154,2°	■		■	■	
4	205,6°	■		■		■
5	257,0°	■			■	■
6	308,4°	■	■		■	

Pos.	Ang.	5a	1a-2a		3a-4a	
		S	1	2	3-3	4
0	0°					
1	51,4°	■	■	■	■	■
2	102,8°	■		■	■	■
3	154,2°	■		■	■	
4	205,6°	■		■		■
5	257,0°	■			■	■
6	308,4°	■	■		■	