

INDICATOR LIGHTS

FUNCTIONS

- Neon or fluorescent lamp, with or without anti-luminescence resistor
- Incandescent lamp
- LED in AC or DC version

VOLTAGE

From 2V to 400V

TEMPERATURE

From 75 °C to 150 °C

GWT

850 °C

GWT NO FLAME (<2sec)

650 °C



S

X

?

?

SERIES

CUT OUT


DRAWING

17



Custom

1

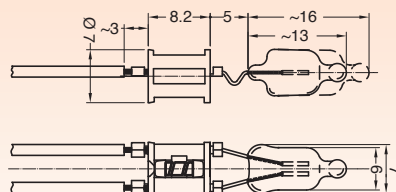


21




Custom



5.4 x 9 mm
th 1.5 mm




3

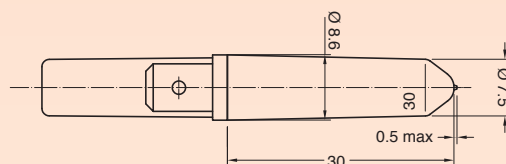


Accessory lenses available separately (pages 160-161)


4

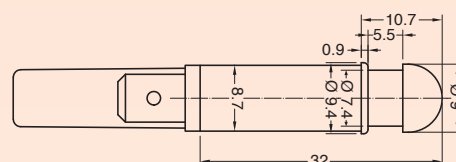

P Drawing 4 + round lens




Q Drawing 4 + square lens










Lens available also separately SX21T542...

Lens available also separately SX21T544...

8

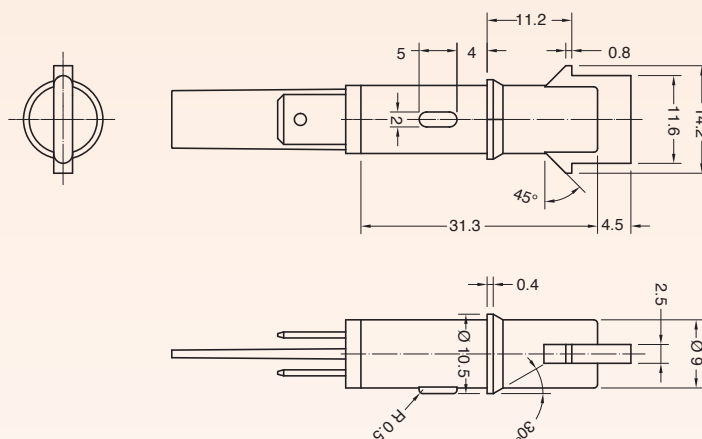

S	X	SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES	0	0
---	---	--------	---------	----------	----------	---------	-------	--------	-------	---	---

?	?	?	?	?	?	?	?	?	0	0
TERMINAL	FUNCTION	VOLTAGE	TEMPERATURE	COLOUR	WIRES					
1 Series 21 Tabs 6.3 x 0.8 	1 Series 17 - 21  Neon or Fluorescent lamp	1 Function 5 2 V	A T 75 °C	SERIES 17 NO LENS ✖ 0 red light 1 green light	000 Terminal 1 - 7 - C Indicator light without wires ??? Terminal A - K - R Indicator light with wires Wires Materials: ■ PVC (up to T90 °C) ■ SILICONE (up to T200 °C) Wires Lengths: from 60 mm to 600 mm (special version available up to 1.450 mm) Wires Ends: ■ pre-stripped (from 5.5 to 18 mm) ■ stripped (from 5.5 to 18 mm) ■ not stripped ■ crimp terminals					
7 Series 17 PCB terminal 	2 Series 21  Neon or Fluorescent lamp with anti-luminescence	3 Function 3 - 5 24 V	2 Function 1 - 2 T 120 °C	SERIES 21 ILLUMINATED ✖ Drawing 3 - 4 L white Drawing P - Q - 8 G red H orange E green L white X ? custom						
A Series 17 Wires 	3 Series 21  Incandescent lamp	4 Function 1 - 2 - 6 - 7 110 V	3 Function 1 - 2 T 150 °C							
C Series 21 Signal Click 	5 Series 21  LED DC or AC current 2 ÷ 24 V	6 Function 1 - 2 - 6 - 7 230 V	8 Function 1 - 2 400 V							
K Series 21 Wires crimped 	6 Series 21 Terminal 1  LED AC current 110 ÷ 250 V	VDE or UL certified	? Available on demand							
R Series 21 Wires sealed 	7 Series 21 Terminal C - K - R  LED AC current 110 ÷ 250 V	X Custom								