



5HE 7TAKT



TYPICAL APPLICATIONS	Hobs control
WIRING DIAGRAMAS	7 positions
GWFI	850 °C
GWIT	750 °C

Rotary switches with different mounting solution available, 7 positions, with electric rating up to 12A. Ideal for hobs control, with a terminal housing conjuncted to the body.


- Standard connecting with single terminals 6,3 mm
- Different mounting solutions available:
snap-in, nuts or screw fixing
- 30.000 cycles
- Pastic shafts with different lengths (16 - 31 mm)

Rating

12 A / 400 VAC 30E3
T150 °C


16 A / 250 VAC
T120 °C

According to EN61058-1
standard

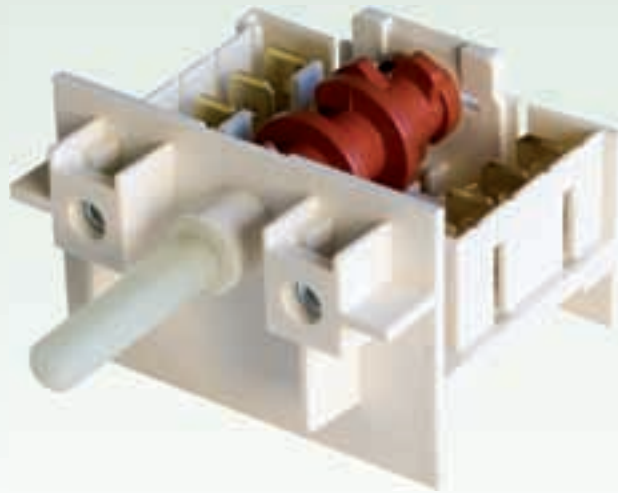


TECHNICAL FEATURES

Rast 6,5 multiple connection.

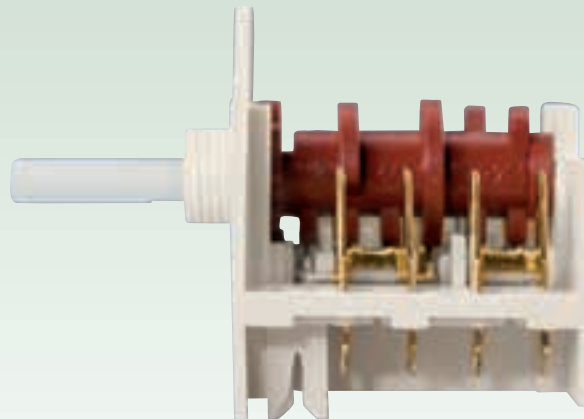

DIMENSIONS

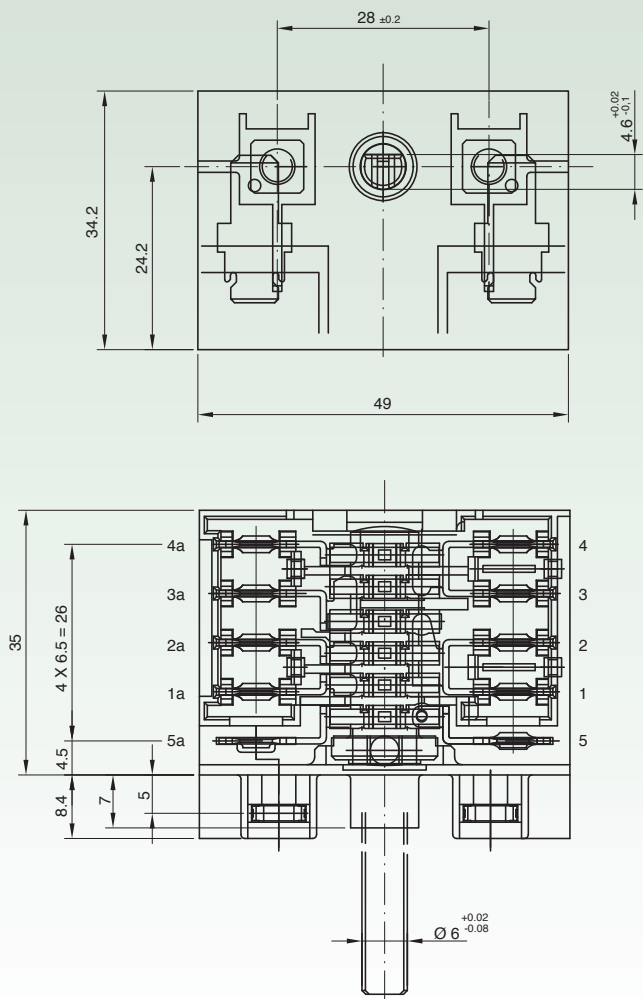

CONTACT SEQUENCE

Pos.	Ang.	P3		P1		P2	
		5a	1a-2a	1a-2a	3a-4a	3a-4a	4a
		5	1	1	3-3	4	
		5	2	2	3-3	4	
0	0°						
1	51,4°	■	■	■		■	■
2	102,8°	■		■		■	■
3	154,2°	■		■		■	
4	205,6°	■		■			■
5	257,0°	■			■		■
6	308,4°	■	■			■	

SOLUTIONS

Nut Fixing



Screw fixing



Snap-in fixing



CUT OUT

