



GP

TYPICAL APPLICATIONS Vacuum and steam cleaners

FUNCTIONS ■ DPST, illuminated or not

CYCLE No. 50.000

CUT OUT 19x13 mm

AMBIENT TEMPERATURE 125 °C

GWT 850 °C

GWT NO FLAME (<2sec) 750 °C on demand



G

P


?

DRAWING


TERMINAL




WATERPROOF CAP

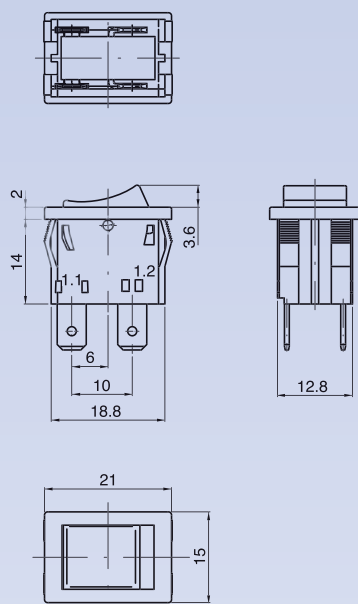


1





3




A



7

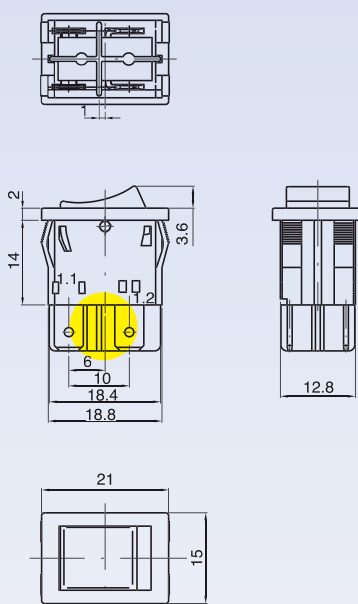




Z	Y	X
0,70 ... 1,25	13,0 ±0,1	19,1 ±0,1
1,25 ... 2,0	13,0 ±0,1	19,4 ±0,1
2,0 ... 3,0	13,0 ±0,1	19,7 ±0,1

G	P	TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING	M	0	0
---	---	----------	----------	--------	-------------	---------------	----------------	---------	---	---	---


?	?	?	?	?	?	M	0	0
---	---	---	---	---	---	---	---	---

FUNCTION

2



8



RATING

H

12 A / 250 VAC
 6 (6) A / 250 VAC
 2 / 120 A - 250 VAC
 5 (5) A / 250 VAC - 5E4
 T125/55 °C
 EN 61058

15 A / 125 VAC
 12 A / 250 VAC
 T65 °C
 UL 1054

BODY COLOUR

1

black

2

white

X

custom

?

ROCKER COLOUR

1

black

2

white

9

red

ILLUMINATED ✨

G

red

E

green

X

custom

?

MARKING COLOUR

0

none

1

black

2

white

8

red

X

custom

?

MARKING

0



1



4



6



R



X

