

KOKKOLA

PELLET STOVE




Kokkola® satisfies the natural need to feel loved and protected; the dancing flames are the perfect balance of warmth and comfort. For houses in cities or in the countryside, near the sea or in the mountains, Kokkola® is the air-ducting pellet stove that furnishes your home with elegance, having delicate flowers decorations and high quality manufacturing.

Some precious details like materials used, from cast iron to precious ceramics handmade by master craftsmen, make the design of Kokkola® very refined and elegant. The predisposition for the top central smoke outlet, together with the innovative cast iron sliding top access to the pellet tank bring a touch of contemporary to the traditional style.



Heatable area

83 m².






- 1- Central flue outlet, on the rear side or on the top
- 2- Programming control panel, with remote control
- 3- One rear hot air ducting outlet
- 4- Precious handmade majolica by master craftsmen
- 5- Cast iron sliding top access to the pellet tank
- 6- Removable door handle Essential design and added safety
- 7- Cast iron burner
- 8- The refined raised base facilitates the cleaning operations



OPTIONAL ACCESSORIES

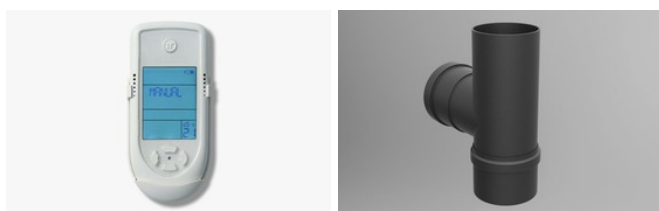

TECHNICAL DATA

DIMENSIONS (HXWXD)	1133X521X577
WEIGHT (KG)	126
HEATABLE AREA (M²)*A*C	83
EFFICIENCY UP TO MAX (%)*A	90,2%
ENERGY CLASS	A+
POWER TO THE HEART (KW)*A	3 - 10,2
RATED POWER (KW)*A	2,5 - 9,2
POWER TO THE WATER (KW)*A	-
RADIATION (KW)*A	3 - 10,2
HOURLY PELLET CONSUMPTION (KG/H)*A	0,7 - 2,3
WOOD HOURLY CONSUMPTION (KG/H)*A	-

PELLET HOPPER CAPACITY (KG)*A	16,0
WARM AIR DUCTING	SI
MAXIMUM SINGLE DUCTING OUTLET (M)	15,00
PATENTED BURNER PELLETPOWER®	-
ROOM VENTILATION	SI
PRIMARY AIR FROM OUTSIDE	SI
CO EMISSIONS (MG/M³; 13% OF O2)*A	188
CO EMISSIONS (MG/M³; 10% OF O2)*A	-
DUST EMISSIONS (MG/M³; 13% OF O2)*A	15
DUST EMISSIONS (MG/M³; 10% OF O2)*A	-
SILENCE (DB)	36
REMOTE CONTROL	SI
RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT	-
WEEKLY PROGRAMMER (3 DAILY LIGHTING)	SI
«SMART INFO» FUNCTION	SI
SYSTEM CIRCULATING PUMP	-
EXPANSION TANK	-
OVER PRESSURE VALVE	SI
FLUE GASEXHAUST DIAMETER (MM)	80
MIN. FLUE DRAUGHT PRESSURE (PA)	9
ELECTRIC CONSUMPTION (WATT)	66-271
HIGH TEMPERATURE SAFETY THERMOSTAT	SI

*A EMISSIONS AND PERFORMANCE DATA MAY CHANGE ACCORDING TO THE FUEL USED. THE VALUES OF PELLET PRODUCTS HAVE BEEN OBTAINED BY USING CERTIFIED FUEL ACCORDING TO EN 14961-2 A1-A2 NORM. WOOD LOGS PRODUCTS VALUES MAY VARY ACCORDING TO THE TYPE AND QUALITY OF THE WOOD LOGS USED.

*B PROVISIONAL DATA UNDER CERTIFICATION

*C IMPORTANT: WHEN CALCULATING THE VOLUME OF THE "HEATED AREA" SOME RELEVANT ASPECTS MUST BE CONSIDERED: INSULATION OF THE BUILDING (ENERGY CLASS), POSITION OF THE HEATER, CLIMATIC AREA AND MORE ASPECTS THAT CAN AFFECT THE VALUES OF PERFORMANCE. REPORTED DATA HAVE BEEN CALCULATED ON THE BASE OF ROOF NOT HIGHER THAN 3 MTS.

THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES WITHOUT PREVIOUS NOTICE.

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: info@thermorossi.it

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.