


5HE 4 BLOCK

TYPICAL APPLICATIONS	Hobs control
WIRING DIAGRAMAS	7 positions
GWFI	850 °C
GWFI	750 °C



This solution integrates all wirings of four 5HE 7TAKT in a single body; robustness, compactness and easy mounting are its best features.

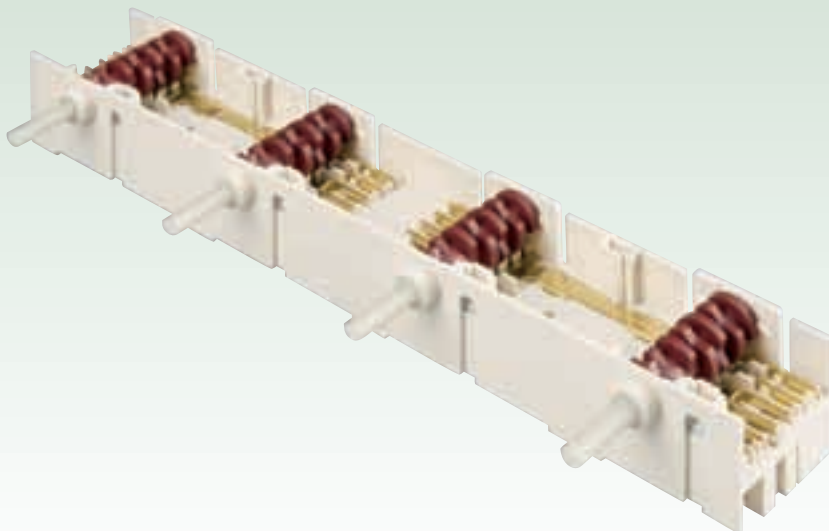

Rating
12 A / 400 VAC - 30E3
T150 °C

16 A / 250 VAC
T120 °C

According to EN61058-1
standard

DIMENSIONS

2 versions:

L = 247.35
D = 65 ±0.2

L = 230.45
D = 60 ±0.2

