

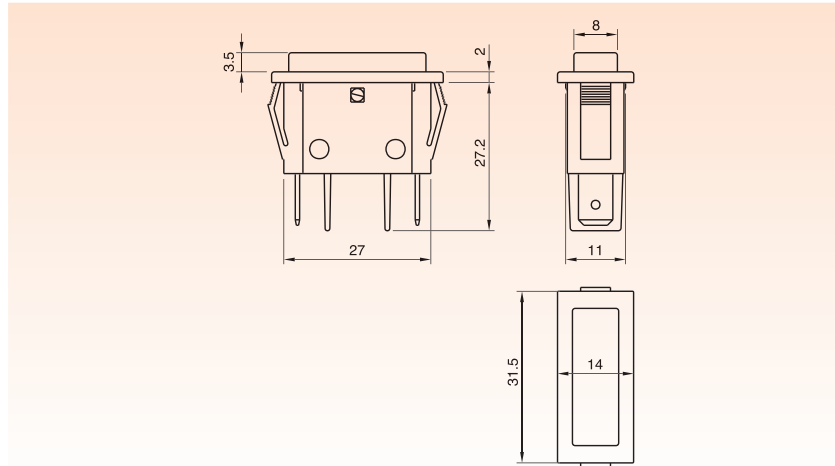


B5


FUNCTION	Indicator light SX81 series
AMBIENT TEMPERATURE	120 °C
GWT	850 °C
GWT NO FLAME (<2sec)	650 °C



B
5

DRAWING


?

TERMINAL

1





Z	Y	X
0,75 ... 1,25	11,0 $\begin{smallmatrix} \pm 0,2 \\ 0 \end{smallmatrix}$	30,0 $\begin{smallmatrix} 0 \\ -0,1 \end{smallmatrix}$
1,25 ... 2,0	11,0 $\begin{smallmatrix} \pm 0,2 \\ 0 \end{smallmatrix}$	30,2 $\begin{smallmatrix} 0 \\ -0,1 \end{smallmatrix}$
2,0 ... 3,0	11,0 $\begin{smallmatrix} \pm 0,2 \\ 0 \end{smallmatrix}$	30,6 $\begin{smallmatrix} 0 \\ -0,2 \end{smallmatrix}$
3,0 ... 4,0	11,0 $\begin{smallmatrix} \pm 0,2 \\ 0 \end{smallmatrix}$	30,8 $\begin{smallmatrix} 0 \\ -0,2 \end{smallmatrix}$

TERMINAL	FUNCTION	RATING	BODY COLOR	LENS COLOR						
B	5				0	0	0	0	0	0

?

FUNCTION

1



?

RATING

2

200 - 250 VAC
T120 °C
VDE 710

200 - 250 VAC
T65 °C
UL 496
CSA C22.2

?

BODY COLOR

1

black

X

custom

?

?

LENS COLOR

ILLUMINATED ✨

G

red

H

orange

E

green

X

custom

?

0 0 0 0 0 0