



Ordinary Glass is the starting point for window glazing, sufficient for windows in non-demanding applications not requiring improved levels of thermal performance. It is available in various forms and thicknesses to meet the basic requirements of the National Construction Code.



SmartGlass<sup>™</sup> is the benchmark for good glazing for your home. Over the years we have become more educated on the importance of insulating our home and the benefits that this can deliver. With steadily increasing energy costs, it is even more important to take steps to reduce our energy demands. Through our active insulation technology improved insulation is available even in standard windows frames.



LightBridge<sup>™</sup> double glazing creates a seamless bridge between inside and out, allowing us to bring into our daily lives the light, space and colours of nature. Because LightBridge offers a market-leading combination of insulation, security and noise reduction properties for domestic windows, we can now easily achieve the expansive glazing we desire to bathe our homes in natural light and reconnect with the world around us.

For enquires please contact your key account manager.

E: [resfab@csr.com.au](mailto:resfab@csr.com.au)  
P: 1300 RESFAB (1300 73 73 22) F: 1300 RESFAX (1300 73 73 29)




Base Level	S1	S2
Base level monolithic glass panes available in annealed and toughened safety glass	Sanctuary 1 has the inclusion of laminated Grade A safety glass. First level enhancement for security, noise control and UV reduction	Sanctuary 2 has all the benefits of Sanctuary 1 but with further enhanced noise control and security
4/*/4mm Clear 5/*/5mm Clear 4/*/4mm Grey 5/*/5mm Grey 4/*/4mm DecorSatin 5/*/6mm DecorSatin 4/*/4mm DecorSatin Grey 5/*/6mm DecorSatin Grey	4/*/6.38mm Clear 5/*/6.38mm Clear 4/*/6.38mm Grey 5/*/6.38mm Grey 4/*/6.38mm Translucent 5/*/6.38mm Translucent 4/*/7.38mm Translucent Grey 5/*/7.38mm Translucent Grey	4/*/6.5mm Clear 5/*/6.5mm Clear 4/*/7.5mm Grey 5/*/7.5mm Grey
4mm, 6mm Clear 4mm, 6mm Neutral 4mm, 6mm Grey	6.38mm Clear 6.38mm Neutral 6.38mm Grey 6.38mm Translucent 7.38mm Translucent Grey	6.5mm Clear 6.5mm Neutral 7.5mm Grey
4, 5, 6mm Clear 4, 5, 6mm Grey 4, 6mm DecorSatin 4, 6mm DecorSatin Grey	6.38mm Clear 6.38mm Grey 6.38mm Translucent 7.38mm Translucent Grey	6.5mm Clear 7.5mm Grey

LightBridge<sup>™</sup>

SmartGlass<sup>™</sup>

Ordinary Glass

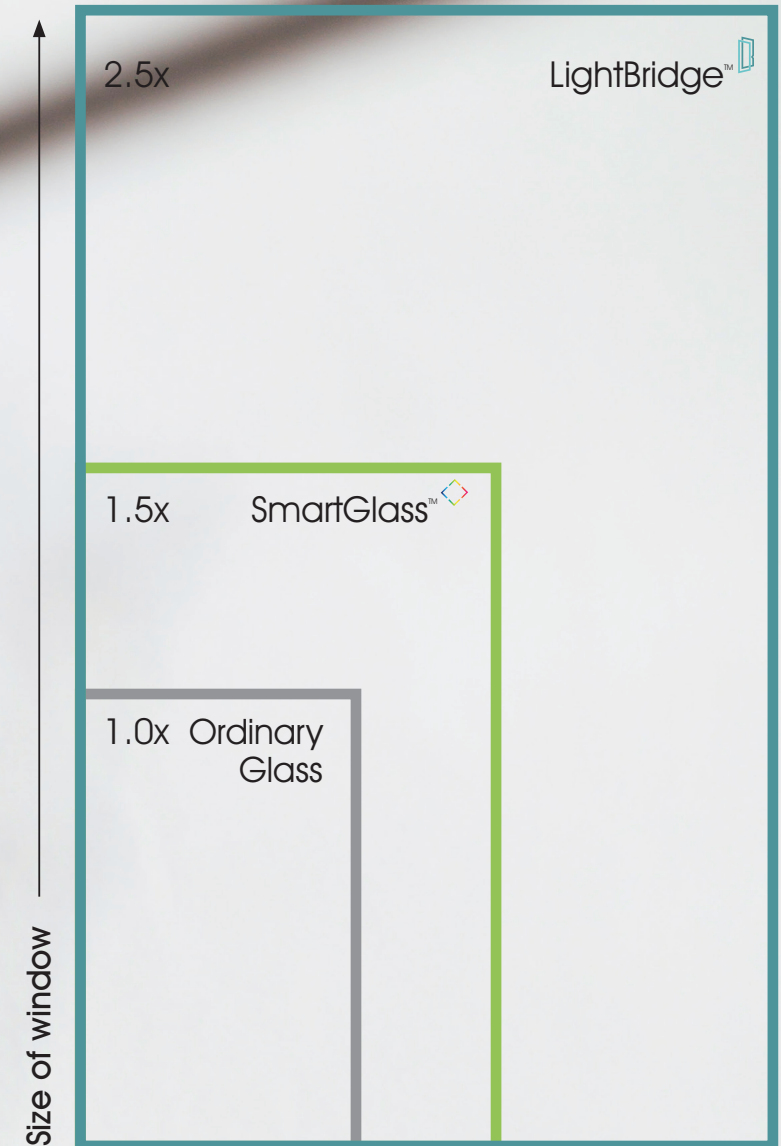

- Minimum size @ 350mm x 250mm
- Maximum size @ 2500mm x 2000mm
- 10.38mm V-lam Clear and 6mm DecorPattern Satinlite available upon request
- LightBridge spacer thicknesses from 8-20mm
- Sizes exceeding 2500mm x 2000mm will be produced manually and POA

For enquires please contact your key account manager.

E: [resfab@csr.com.au](mailto:resfab@csr.com.au)  
 P: 1300 RESFAB (1300 73 73 22) F: 1300 RESFAX (1300 73 73 29)

