RoHS



SHADED POLE **MOTOR Ø 52**

FEATURES


Motor life: from 3.000 hours (brass bearings) to 30.000 hours (ball bearings)

Heat and fire resistance version available GWIT 775 °C

2-speed version available

Class of insulation according to IEC 85: B or F Voltage: 12 - 110 - 230 - 240 VAC

Ideal for reduced space, they are available in a wide range of versions and they are featuring high electromagnetic efficiency. This allows Giem to meet several application requirements: ventilators, fan heaters, air cleaners, and humidifiers



Shaft diameter 4 mm; clock-wise and counter clock-wise

Fuse

Thermostat

OPTIONS





Shaft can be smooth, milled or with grooves with length on demand

Brass bearings or ball bearings



Stack height from 16 to 30 mm







Motors protected by motor impedance or thermal protected by fuse or thermostat (autoreset or PTC)



DIMENSIONS

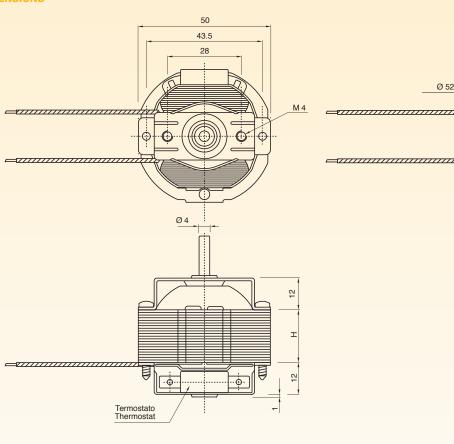





TECHNICAL FEATURES

	Power absorption W		
Stack height (H) mm	Low consumption version	Normal version	Powered version
16	8	15	25
20	10	20	25
25	15	20	30
30	20	30	40

Ċ

 $(\bigcirc$

Ô

·Ô

¢

14 16 50

Ø 52