

S X ? ?

SERIES

CUT OUT



?

DRAWING

27





Ø 8 mm
th 0.5 ... 2 mm



M No lens

P Drawing M + lens

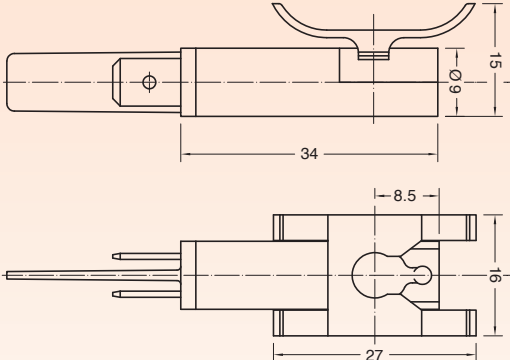

Lens available also separately SX27TP...

28



Custom



Ø 9 mm
th 0.5 ... 2 mm



Ø 9 mm
th 0.5 ... 2 mm



Custom




Ø 9 mm
th 0.5 ... 2 mm

Ø 9 mm
th 0.5 ... 2 mm

9 No lens

6 Drawing 9 + lens

F Drawing 9 + lens

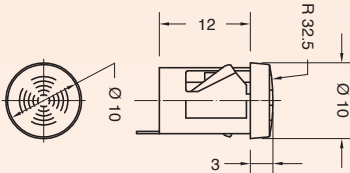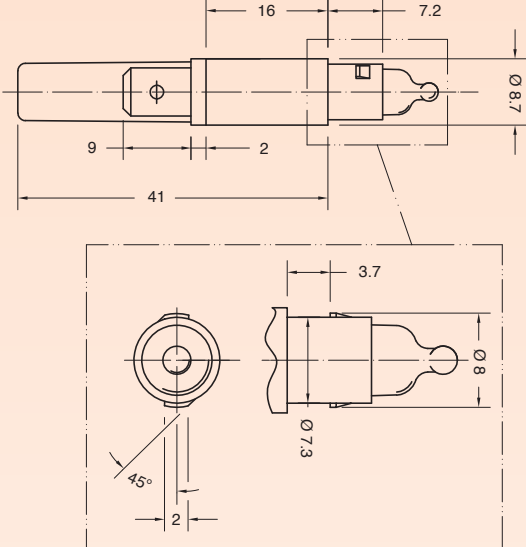


Lens available also separately SX28T6...

Lens available also separately SX28TF...

Further lens shapes available on demand

H One piece

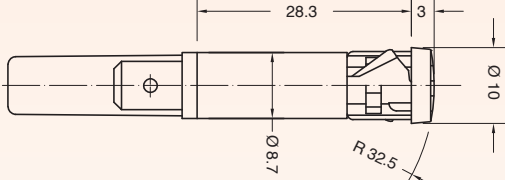


S	X	SERIES	DRAWING	TERMINAL	FUNCTION	VOLTAGE	TEMP.	COLOUR	WIRES	0	0


?	?	?	?	?	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---	---	---	---

TERMINAL


1 Series 27 - 28 Tabs 6.3 x 0.8




C Series 27 - 28 Signal Click



K Series 28 Wires crimped




R Series 27 - 28 Wires sealed




FUNCTION


1 Series 27 - 28




2 Series 27 - 28




3 Series 27 - 28




5 Series 27 - 28



6 Series 28 Terminal 1



7 Series 28 Terminal C - K - R



VOLTAGE

1 Function 5

2 V

2 Function 3 - 5

12 V

3 Function 3 - 5

24 V

4 Function 1 - 2 - 6 - 7

110 V

5 Function 1 - 2 - 6 - 7

125 V

6 Function 1 - 2 - 6 - 7

230 V

7 Function 1 - 2 - 6 - 7

250 V

8 Function 1 - 2

400 V

VDE or UL certified

?

Available on demand

X

Custom

TEMPERATURE

A

T 75 °C

1 Function 1 - 2 - 3

T 90 °C

2 Function 1 - 2

T 120 °C

3 Function 1 - 2

T 150 °C

COLOUR

NO LENS ✖



ILLUMINATED ✖



WIRES

000 Terminal 1 - C

Indicator light without wires

??? Terminal K - R

Indicator light with wires

Wires Material:

- PVC (up to T90 °C)
- SILICONE (up to T200 °C)

Wires Length:

from 60 mm to 600 mm
(special version available up to 1.450 mm)

Wires Ends:

- pre-stripped (from 5.5 to 18 mm)
- stripped (from 5.5 to 18 mm)
- not stripped
- crimp terminals