

# 5000 TCOM METALCOLOR

AIR-DUCTING PELLET STOVE



Its anthracite grey colour and its meticulous finish with bas-relief details make it the perfect unit for any room.

Heatable area

83 m<sup>2</sup>.






- 1 - Programming control panel, with remote control
- 2 - Cast iron firebox door
- 3 - Cast iron burner
- 4 - Removable spacious ash tray
- 5 - Cool touch door handle

Duct vents options: two rear



## DETAILS

---

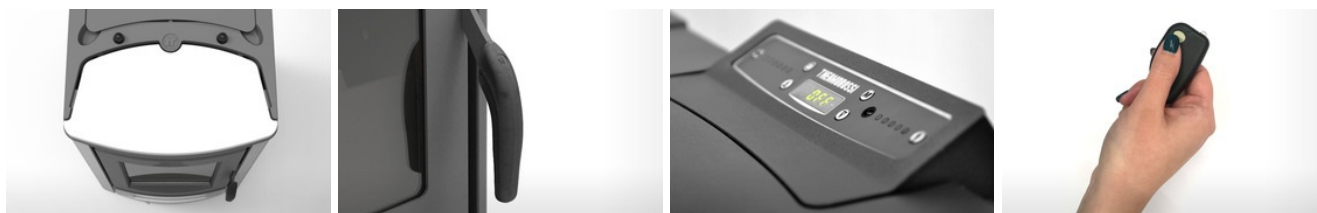


## OPTIONAL ACCESSORIES

---



## DIMENSIONS

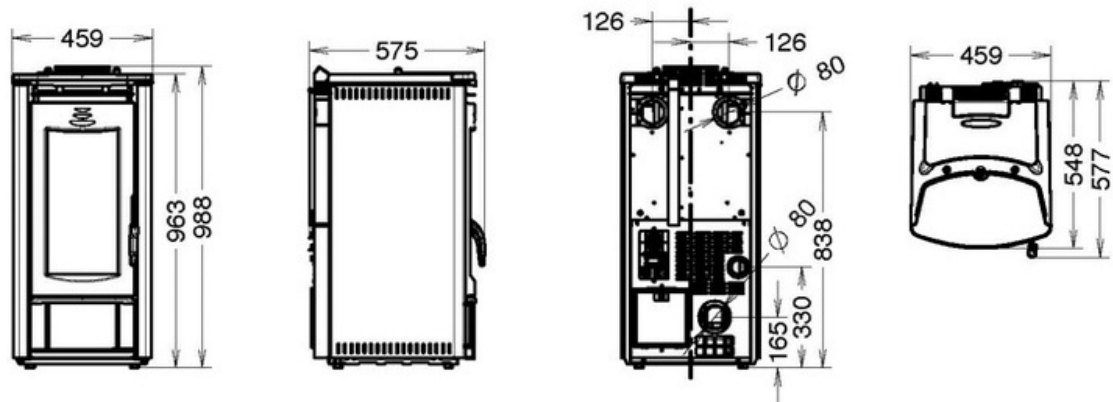

## TECHNICAL DATA

DIMENSIONS (HXWXD)	990X459X577
WEIGHT (KG)	129
HEATABLE AREA (M <sup>2</sup> )*A*C	83
EFFICIENCY UP TO MAX (%)*A	90,2%
ENERGY CLASS	A+
POWER TO THE HEART (KW)*A	3 - 10,2
RATED POWER (KW)*A	2,5 - 9,2
POWER TO THE WATER (KW)*A	-
RADIATION (KW)*A	-
HOURLY PELLET CONSUMPTION (KG/H)*A	0,7 - 2,3
WOOD HOURLY CONSUMPTION (KG/H)*A	-
PELLET HOPPER CAPACITY (KG)*A	14,5
WARM AIR DUCTING	SI
MAXIMUM SINGLE DUCTING OUTLET (M)	15
PATENTED BURNER PELLETPOWER®	-
ROOM VENTILATION	SI
PRIMARY AIR FROM OUTSIDE	SI
CO EMISSIONS (MG/M <sup>3</sup> ; 13% OF O <sub>2</sub> )*A	188
CO EMISSIONS (MG/M <sup>3</sup> ; 10% OF O <sub>2</sub> )*A	-
DUST EMISSIONS (MG/M <sup>3</sup> ; 13% OF O <sub>2</sub> )*A	15
DUST EMISSIONS (MG/M <sup>3</sup> ; 10% OF O <sub>2</sub> )*A	-
SILENCE (DB)	36
REMOTE CONTROL	SI
RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT	OPT
WEEKLY PROGRAMMER (3 DAILY LIGHTING)	SI
«SMART INFO» FUNCTION	-
SYSTEM CIRCULATING PUMP	-
EXPANSION TANK	-
OVER PRESSURE VALVE	SI
FLUE GASEXHAUST DIAMETER (MM)	80
MIN. FLUE DRAUGHT PRESSURE (PA)	9
ELECTRIC CONSUMPTION (WATT)	70-270

\*A EMISSIONS AND PERFORMANCE DATA MAY CHANGE ACCORDING TO THE FUEL USED. THE VALUES OF PELLET PRODUCTS HAVE BEEN OBTAINED BY USING CERTIFIED FUEL ACCORDING TO EN 14961-2 A1-A2 NORM. WOOD LOGS PRODUCTS VALUES MAY VARY ACCORDING TO THE TYPE AND QUALITY OF THE WOOD LOGS USED.

\*B PROVISIONAL DATA UNDER CERTIFICATION

\*C IMPORTANT: WHEN CALCULATING THE VOLUME OF THE "HEATED AREA" SOME RELEVANT ASPECTS MUST BE CONSIDERED: INSULATION OF THE BUILDING (ENERGY CLASS), POSITI  
THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES WITHOUT PREVIOUS NOTICE.

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: [info@thermorossi.it](mailto:info@thermorossi.it)

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.