

# 7000 TCOM MAIOLICA

AIR-DUCTING PELLET STOVE



Pellet heater available in a variety of finishes, will become a stunning centrepiece for your home. The innovative design of the vertical tube heat exchanger THERMOCORE® allows the appliance to achieve both a very high performance and maximum energy saving. Equipped with simplified cleaning system EASY CLEANING. A practical selector allows you to adjust the heat from the front to the back and consequently to heat more than one room.

Heatable area

112 m<sup>2</sup>.






- 1 - Programming control panel, with remote control
- 2 - Access to the pellet tank
- 3 - Precious majolica handmade by master craftsmen
- 4 - Practical food warming plate in majolica W x D (mm) 300x240
- 5 - Cast iron and glass inlaid firebox door



## OPTIONAL ACCESSORIES



## DIMENSIONS

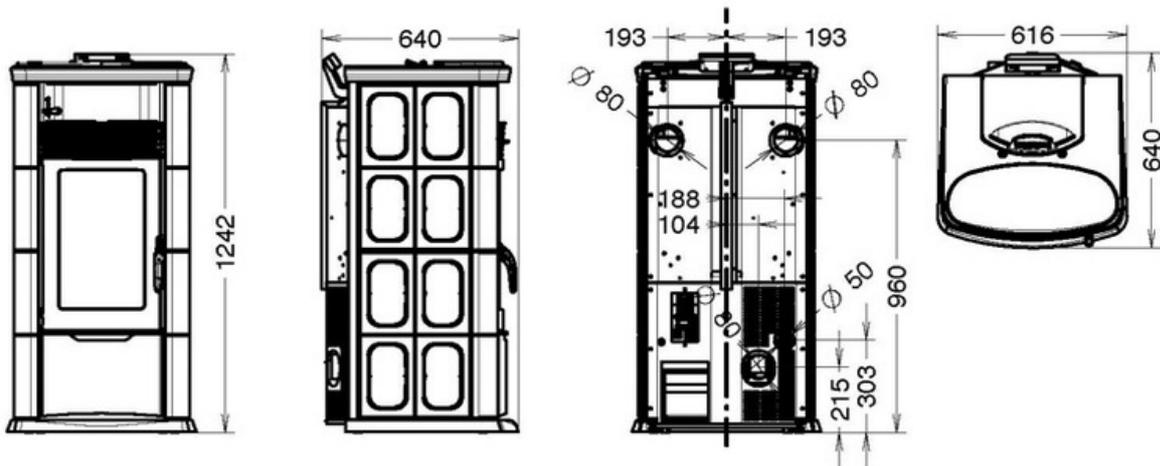

## TECHNICAL DATA

|   |              |
|---|--------------|
| DIMENSIONS (HXWXD)  | 1242X616X640 |
| WEIGHT (KG)   | 219          |
| HEATABLE AREA (M <sup>2</sup> )*A*C                           | 112          |
| EFFICIENCY UP TO MAX (%)*A                                    | 95,0%        |
| ENERGY CLASS  | A+           |
| POWER TO THE HEART (KW)*A                                     | 3,5 - 13,9   |
| RATED POWER (KW)*A  | 3,3 - 12,4   |
| POWER TO THE WATER (KW)*A                                     | -            |
| RADIATION (KW)*A  | -            |
| HOURLY PELLET CONSUMPTION (KG/H)*A                            | 0,7 - 2,8    |
| WOOD HOURLY CONSUMPTION (KG/H)*A                              | -            |
| PELLET HOPPER CAPACITY (KG)*A                                 | 30,0         |
| WARM AIR DUCTING  | SI           |
| MAXIMUM SINGLE DUCTING OUTLET (M)                             | 16           |
| PATENTED BURNER PELLETPOWER®                                  | -            |
| ROOM VENTILATION  | SI           |
| PRIMARY AIR FROM OUTSIDE                                      | SI           |
| CO EMISSIONS (MG/M <sup>3</sup> ; 13% OF O <sub>2</sub> )*A   | 233          |
| CO EMISSIONS (MG/M <sup>3</sup> ; 10% OF O <sub>2</sub> )*A   | -            |
| DUST EMISSIONS (MG/M <sup>3</sup> ; 13% OF O <sub>2</sub> )*A | 19           |
| DUST EMISSIONS (MG/M <sup>3</sup> ; 10% OF O <sub>2</sub> )*A | -            |
| SILENCE (DB)  | 36           |
| REMOTE CONTROL  | SI           |
| RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT                | OPT          |
| WEEKLY PROGRAMMER (3 DAILY LIGHTING)                          | SI           |
| «SMART INFO» FUNCTION   | SI           |
| SYSTEM CIRCULATING PUMP                                       | -            |
| EXPANSION TANK  | -            |
| OVER PRESSURE VALVE   | -            |
| FLUE GASEXHAUST DIAMETER (MM)                                 | 80           |
| MIN. FLUE DRAUGHT PRESSURE (PA)                               | 10           |
| ELECTRIC CONSUMPTION (WATT)                                   | 70-270       |
| HIGH TEMPERATURE SAFETY THERMOSTAT                            | SI           |

\*A EMISSIONS AND PERFORMANCE DATA MAY CHANGE ACCORDING TO THE FUEL USED. THE VALUES OF PELLET PRODUCTS HAVE BEEN OBTAINED BY USING CERTIFIED FUEL ACCORDING TO EN 14961-2 A1-A2 NORM. WOOD LOGS PRODUCTS VALUES MAY VARY ACCORDING TO THE TYPE AND QUALITY OF THE WOOD LOGS USED.

\*B PROVISIONAL DATA UNDER CERTIFICATION

\*C IMPORTANT: WHEN CALCULATING THE VOLUME OF THE "HEATED AREA" SOME RELEVANT ASPECTS MUST BE CONSIDERED: INSULATION OF THE BUILDING (ENERGY CLASS), POSITION OF THE HEATER, CLIMATIC AREA AND MORE ASPECTS THAT CAN AFFECT THE VALUES OF PERFORMANCE. REPORTED DATA HAVE BEEN CALCULATED ON THE BASE OF ROOF NOT HIGHER THAN 3 MTS.

THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES WITHOUT PREVIOUS NOTICE.

---

THERMOROSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: [info@thermorossi.it](mailto:info@thermorossi.it)

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.