


M Series Simplex | Two Stage Electric

80 & 120-Gallon Horizontal & Vertical



Loaded with standard features, the M Series air compressors are available in many motor configurations. Offered with vertical or horizontal tank options, this series comes complete to meet the most demanding industrial applications.

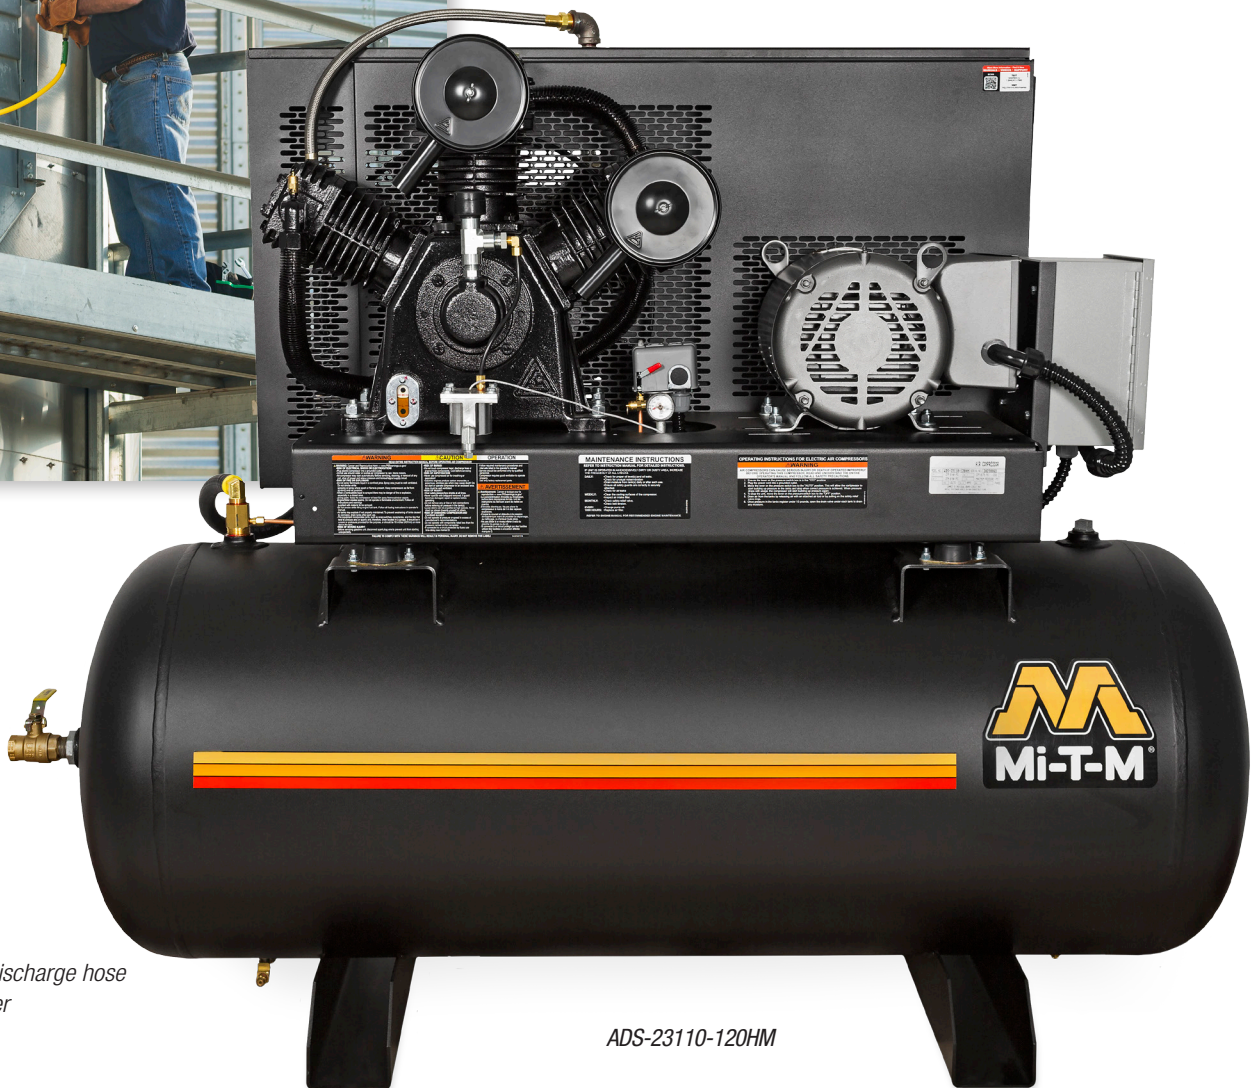

ADS-23110-120HM

Compressor Pump

- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

Motor

- Industrial low RPM motor
- Magnetic start for thermal overload protection

Frame

- Powder coated ASME coded 80 or 120-gallon receiver tank
- $\frac{3}{16}$ -inch base plate to reduce vibration
- Totally enclosed powder coated belt guard

Components

- ASME safety valves
- Tank pressure gauge
- Hour meter
- Large fly wheel
- Intake filter/silencer
- Tank shut-off valve



M Series Simplex | Two Stage Electric

80 & 120-Gallon Horizontal & Vertical



Horizontal Models									
<i>Model Number</i>	<i>CFM @ PSI</i>	<i>Horsepower/Motor</i>	<i>Pump RPM</i>	<i>Compressor</i>	<i>Tank Size</i>	<i>Dimensions (LxWxH)</i>	<i>Bolt Down Dimensions (LxW)</i>	<i>Ship Wt.</i>	<i>Net Wt.</i>
ACS-23105-80HM	18.0 @ 175	5.0 HP, 230V, 1Ø, 23.0A	860	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	615 lb.	544 lb.
ACS-20305-80HM	18.0 @ 175	5.0 HP, 200V, 3Ø, 16.1A	860	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	615 lb.	544 lb.
ACS-23305-80HM	18.0 @ 175	5.0 HP, 230V, 3Ø, 13.8A	860	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	615 lb.	544 lb.
ACS-46305-80HM	18.0 @ 175	5.0 HP, 460V, 3Ø, 6.9A	860	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	615 lb.	544 lb.
ACS-23175-80HM	23.5 @ 175	7.5 HP, 230V, 1Ø, 31.0A	1250	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	780 lb.	709 lb.
ACS-20375-80HM	23.5 @ 175	7.5 HP, 200V, 3Ø, 23.0A	1250	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	780 lb.	709 lb.
ACS-23375-80HM	23.5 @ 175	7.5 HP, 230V, 3Ø, 20.0A	1250	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	780 lb.	709 lb.
ACS-46375-80HM	23.5 @ 175	7.5 HP, 460V, 3Ø, 10.0A	1250	Two stage, cast iron	80-gallon	52x26.5x53in.	20.75x23.5in.	780 lb.	709 lb.
ADS-23110-120HM	34.2 @ 175	10.0 HP, 230V, 1Ø, 39.0A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	890 lb.	811 lb.
ADS-20310-120HM	34.2 @ 175	10.0 HP, 200V, 3Ø, 30.8A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	890 lb.	811 lb.
ADS-23310-120HM	34.2 @ 175	10.0 HP, 230V, 3Ø, 26.8A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	890 lb.	811 lb.
ADS-46310-120HM	34.2 @ 175	10.0 HP, 460V, 3Ø, 13.4A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	890 lb.	811 lb.
AES-20315-120HM	46.5 @ 175	15.0 HP, 200V, 3Ø, 44.0A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	935 lb.	856 lb.
AES-23315-120HM	46.5 @ 175	15.0 HP, 230V, 3Ø, 38.0A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	935 lb.	856 lb.
AES-46315-120HM	46.5 @ 175	15.0 HP, 460V, 3Ø, 19.0A	990	Two stage, cast iron	120-gallon	74x26.5x58in.	34.5x23.5in.	935 lb.	856 lb.

Vertical Models									
<i>Model Number</i>	<i>CFM @ PSI</i>	<i>Horsepower/Motor</i>	<i>Pump RPM</i>	<i>Compressor</i>	<i>Tank Size</i>	<i>Dimensions (LxWxH)</i>	<i>Bolt Down Dimensions (LxW)</i>	<i>Ship Wt.</i>	<i>Net Wt.</i>
ACS-23105-80VM	18.0 @ 175	5.0 HP, 230V, 1Ø, 23.0A	860	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	615 lb.	544 lb.
ACS-20305-80VM	18.0 @ 175	5.0 HP, 200V, 3Ø, 16.1A	860	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	615 lb.	544 lb.
ACS-23305-80VM	18.0 @ 175	5.0 HP, 230V, 3Ø, 13.8A	860	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	615 lb.	544 lb.
ACS-46305-80VM	18.0 @ 175	5.0 HP, 460V, 3Ø, 6.9A	860	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	615 lb.	544 lb.
ACS-23175-80VM	23.5 @ 175	7.5 HP, 230V, 1Ø, 31.0A	1250	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	780 lb.	709 lb.
ACS-20375-80VM	23.5 @ 175	7.5 HP, 200V, 3Ø, 23.0A	1250	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	780 lb.	709 lb.
ACS-23375-80VM	23.5 @ 175	7.5 HP, 230V, 3Ø, 20.0A	1250	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	780 lb.	709 lb.
ACS-46375-80VM	23.5 @ 175	7.5 HP, 460V, 3Ø, 10.0A	1250	Two stage, cast iron	80-gallon	33x25x73in.	15.63x15.63in.	780 lb.	709 lb.

Accessories:		
<i>Part Number</i>	<i>Description</i>	<i>Fits Models</i>
3-0312	Pump - Replacement pump	ACS horizontal & vertical models
3-0313	Pump - Replacement pump	ADS models
3-0314	Pump - Replacement pump	AES models


M Series | Standard Features



These standard features are what sets the M Series air compressors apart from our standard line-up.



Air-cooled after cooler removes up to 65% of moisture and drops temperature within 10°F of ambient



Low oil sensor does not allow unit to start when oil levels fall below an adequate level



Vibration isolator pads protect the tank from stress



Tank drain automatically drains liquid from the air receiver

ACS-23105-80VM

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.