



WATERPROOF CAP

A4

TYPICAL APPLICATIONS Vacuum cleaners, H VAC

FUNCTIONS

- SPST, momentary or not
- DPST, illuminated or not
- DPCO
- DPDT, momentary or not

CYCLE No. 50.000

CUT OUT 19x22 mm


AMBIENT TEMPERATURE 125 °C

GWT 850 °C


GWT NO FLAME (<2sec) 750 °C on demand



DRAWING

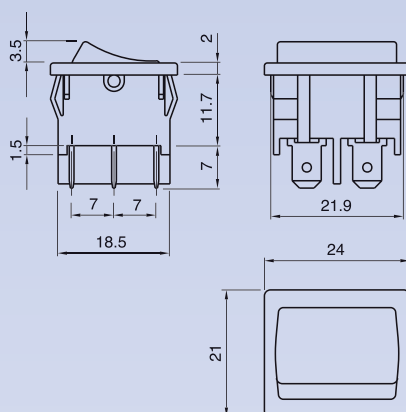


Function 9

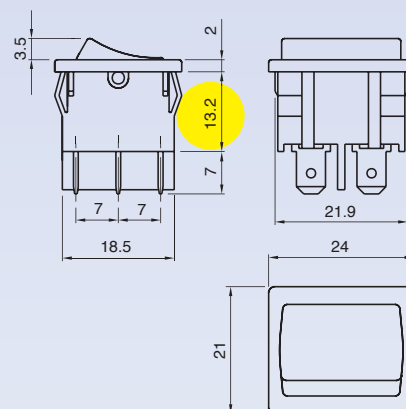


?


TERMINAL

1



2



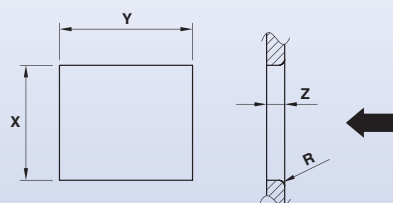

Z	Y	X
0,7 ... 1,25	22,0 ±0,1	19,0 ±0,2
1,25 ... 2,0	22,0 ±0,1	19,3 ±0,2
2,0 ... 3,0	22,0 ±0,1	19,6 ±0,2

TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING
A	4					0 0 0

?	?	?	?	?	?	0 0 0
---	---	---	---	---	---	-------

FUNCTION

RATING

BODY COLOUR

ROCKER COLOUR


MARKING COLOUR

MARKING

1




2




4




8




9



L



M



2

Function 4 - M

6 (2) A / 250 VAC
3 (1) A / 250 VAC - 5E4
T125/55 °C - T125 °C
EN 61058

6 A - 125 / 250 VAC
1/6 HP - 250 VAC
1/10 HP - 125 VAC
T105 °C
UL 1054
CSA C22.2

3

Function 1 - 2 - L - 8

10 (4) A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125/55 °C - T125 °C
EN 61058

10 A - 125 / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

6

Function 9

10 (2) A / 250 VAC
6 (1) A / 250 VAC - 5E4
T125/55 °C - T125 °C
μ disconnection
EN 61058

6 A - 125 / 250 VAC
1/8 HP - 125 VAC
1/6 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

B

Function 2

13 (4) A / 250 VAC
8 (8) A / 250 VAC - 5E4
T125/55 °C - T125 °C
EN 61058

15 A / 125 VAC
10 A / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

Function 9

13 (4) A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125/55 °C - T125 °C
μ disconnection
EN 61058

15 A / 125 VAC
10 A / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

1

black

2

white

X

custom

1

black

2

white

ILLUMINATED ✱

G

red

H

orange

E

green

L

white

X

custom

0

none

1

black

2

white

5

grey

7

light blue

8

red

9

orange

X

custom

0



1



2



3



5



9



C



K



N



Z



X





A4

TYPICAL APPLICATIONS Vacuum cleaners, H VAC

FUNCTIONS

- DPST, illuminated or not
- DPDT

CYCLE No. 50.000


CUT OUT 19x22 mm

AMBIENT TEMPERATURE 125 °C


GWT 850 °C

GWT NO FLAME (<2sec) 750 °C on demand





DRAWING

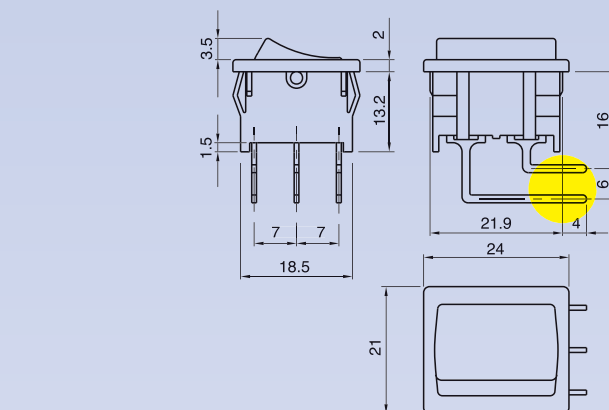


TERMINAL

C


WATERPROOF CAP

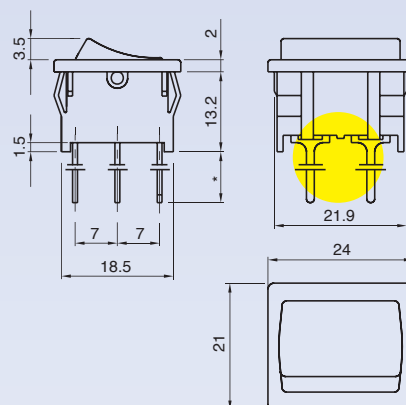5

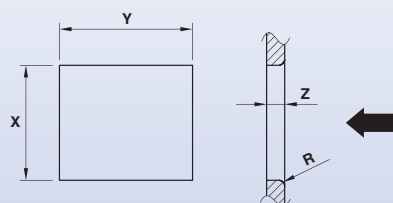6




Z	Y	X
0,7 ... 1,25	22,0 ±0,1	19,0 ±0,2
1,25 ... 2,0	22,0 ±0,1	19,3 ±0,2
2,0 ... 3,0	22,0 ±0,1	19,6 ±0,2

TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING
A	4					0 0 0

?	?	?	?	?	?	0	0	0
---	---	---	---	---	---	---	---	---

FUNCTION




RATING

BODY COLOUR

ROCKER COLOUR

MARKING COLOUR

MARKING

2 Terminal C - 6**8** Terminal C**L** Terminal 5**3**

10 (4) A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125/55 °C - T125 °C
EN 61058

10 A - 125 / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

1

black

2

white

X

custom

1

black

2

white

ILLUMINATED ✱

G

red

H

orange

E

green

L

white

X

custom

0

none

1

black

2

white

5

grey

7

light blue

8

red

9

orange

X

custom

0**1****2****3****5****C****K****Z****X**