


Slide and Rotary Switches

01



LF

122




R1

124



DS

126



DH

127



LF2



LF3



LF4

LF

TYPICAL APPLICATIONS Cooker hoods, hairdryers

- FUNCTIONS**
- 1 step, SP or DP
 - 2 steps, DP
 - 3 steps, DP

CYCLE No. 10.000

CUT OUT Rear panel

AMBIENT TEMPERATURE 125 °C

GWT 850 °C

GWT NO FLAME (<2sec) 750 °C






L

F




?

DRAWING




2




3




4






LF2



LF3



LF4

L	F	DRAWING	TERMINAL	FUNCTION	RATING	0	0	0	W
---	---	---------	----------	----------	--------	---	---	---	---

?

TERMINAL

1

2

4

?

FUNCTION

Drawing 2

A

B

E

Drawing 3

A

B

Drawing 4

A

B

?


RATING

3

8 (3) A / 250 VAC
T125 °C
EN 61058

8 A / 125 VAC
T65 °C
UL 1054

0 0 0 W



R1


TYPICAL APPLICATIONS	Fan heaters, small ovens, cleaners
FUNCTIONS	■ 30° steps (up to 6 positions), SP or DP
CYCLE No.	10.000 (50.000 on demand)
CUT OUT	28 mm interaxes screws
AMBIENT TEMPERATURE	150 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand



R


1


DRAWING

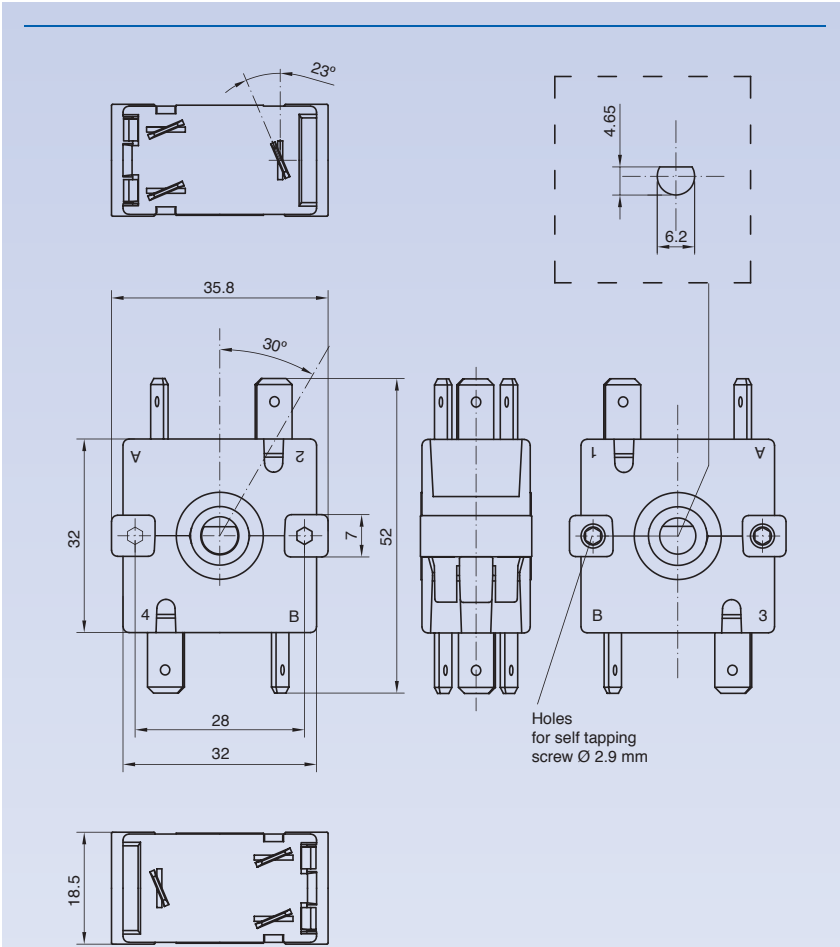

?

TERMINAL






	TERMINAL	FUNCTION	RATING	SHAFT		
R	1				0	0


?

FUNCTION


A1




D1




D2




D3




D5




D7




D8




D9




E4




FA




FU




G4




G6



GE



H2



?

RATING

1

13 (3) A / 250 VAC
6 (6) A / 250 VAC
T150 °C
EN 61058


13 A / 125 VAC
T65 °C
UL 1054
CSA C22.2

?

SHAFT


0 No shaft

1




Shaft also available separately R019000

2




Shaft also available separately R023000

3



Shaft also available separately R022000

4



Shaft also available separately R104000




DS

TYPICAL APPLICATIONS	H VAC
FUNCTIONS	■ 45° steps (with 3 or 5 rest positions), SP
CYCLE No.	50.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	85 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C on demand




DRAWING


DS37

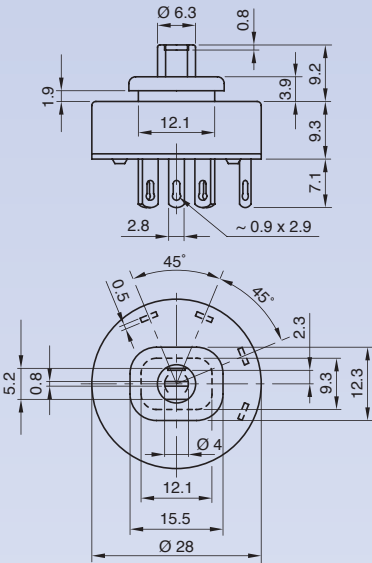

DS51

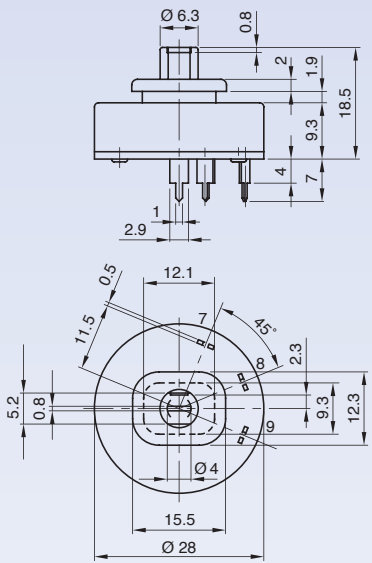


FUNCTION



RATING

2 (2) A / 250 VAC - 5E4
T85 °C
EN 61058
2A / 250 VAC
T65 °C
UL 1054






DH

TYPICAL APPLICATIONS	Circulation pumps
FUNCTIONS	■ 45° steps (with 3 positions), SP
CYCLE No.	10.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	85 °C
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C




DRAWING


DH3

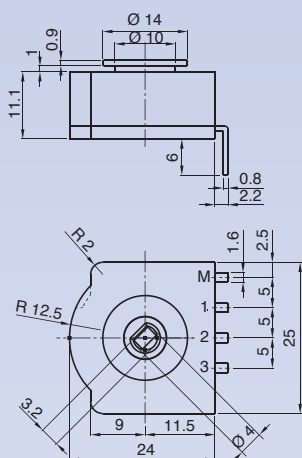

DH4

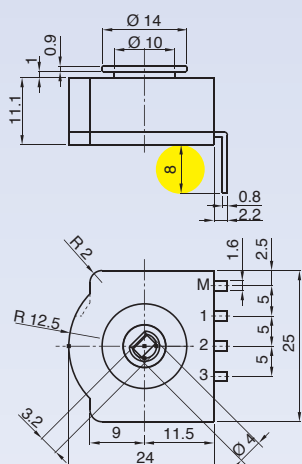

FUNCTION



RATING

2 (2) A / 250 VAC
1 (0.5) A / 250 VAC
T85 °C
EN 61058

2A / 125 VAC
T85 °C
UL 1054