
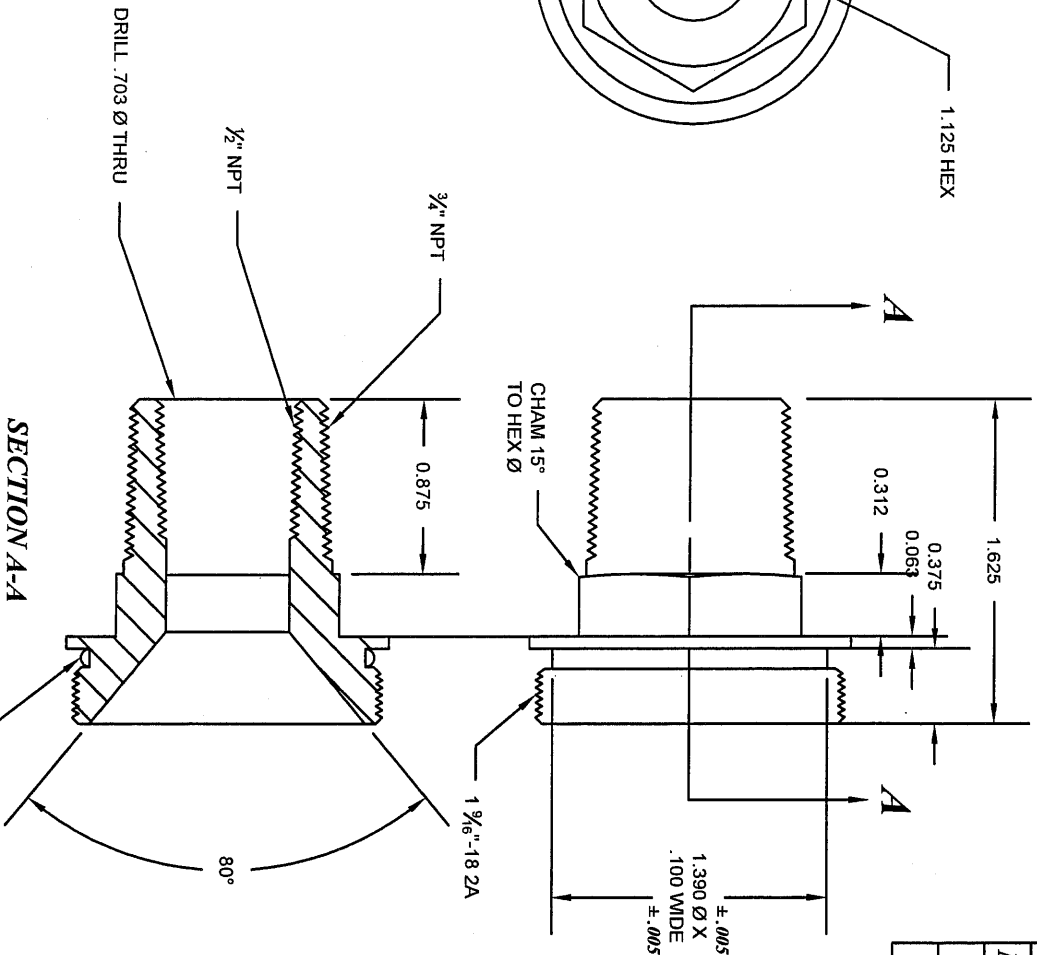


REV:	DESCRIPTION:	BY:	APPVD:	DATE:
N/C	RELEASED		P.H.	11/28/13
A	ADDED THREADS & O-RING		P.H.	2/21/14
B	TOLERANCE CHANGE, O-RING GROOVE FROM .000 TO .100		P.H.	3/13/14

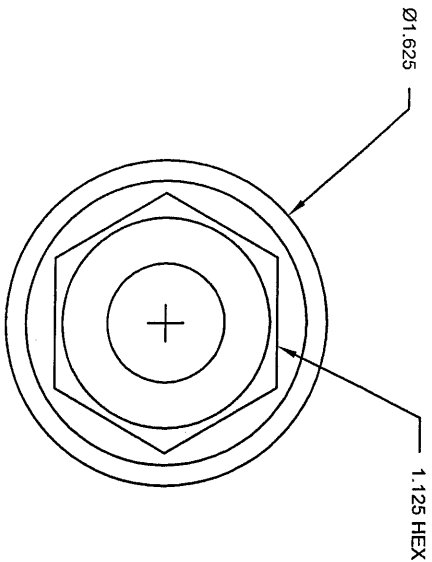

VITON O-RING (-126) MCMASTER
CARR REF #: 9464K91 OR EQUIVALENT

QUALITY ASSURED, INC

DESC
.75-6 END, FITTING

TOLERANCES UNLESS SPECIFIED
1. ACCORDING TO DECIMAL PLACES

.XXX = ±.010
.XX = ±.050

2. ANGLES: X° = ± 1 Deg.
3. SURFACE FINISH: 125 OR BETTER
4. BREAK ALL EDGES 45 Deg. x .010

DESIGNED BY:

P. Hurdley

DATE:

11/28/13

SCALE

REV. B

DRAWN BY:

Garrett Hurdley

DATE:

SHT

SIZE

CHKD BY:

DATE:

PART NO.

Q4-7066-1

MATL:

1 5/8" Ø 303 S.S.

HEAT TREAT: NONE

FILE NAME:

JOB NUMBER:

A

B

C

D

E

F

G

6

5

4

3

2

1

A

B

C

D

E

F

G

6

5


4

3

2

1

REV:	DESCRIPTION:	BY:	APPVD:	DATE:
N/C	RELEASED	N/C	P.H.	11/28/13
A	ADDED 1 1/16" -18 2B THREAD	P.H.	G.H.	2/20/14
B	ADDED CHAM & 32 FINISH	P.H.	G.H.	3/13/14

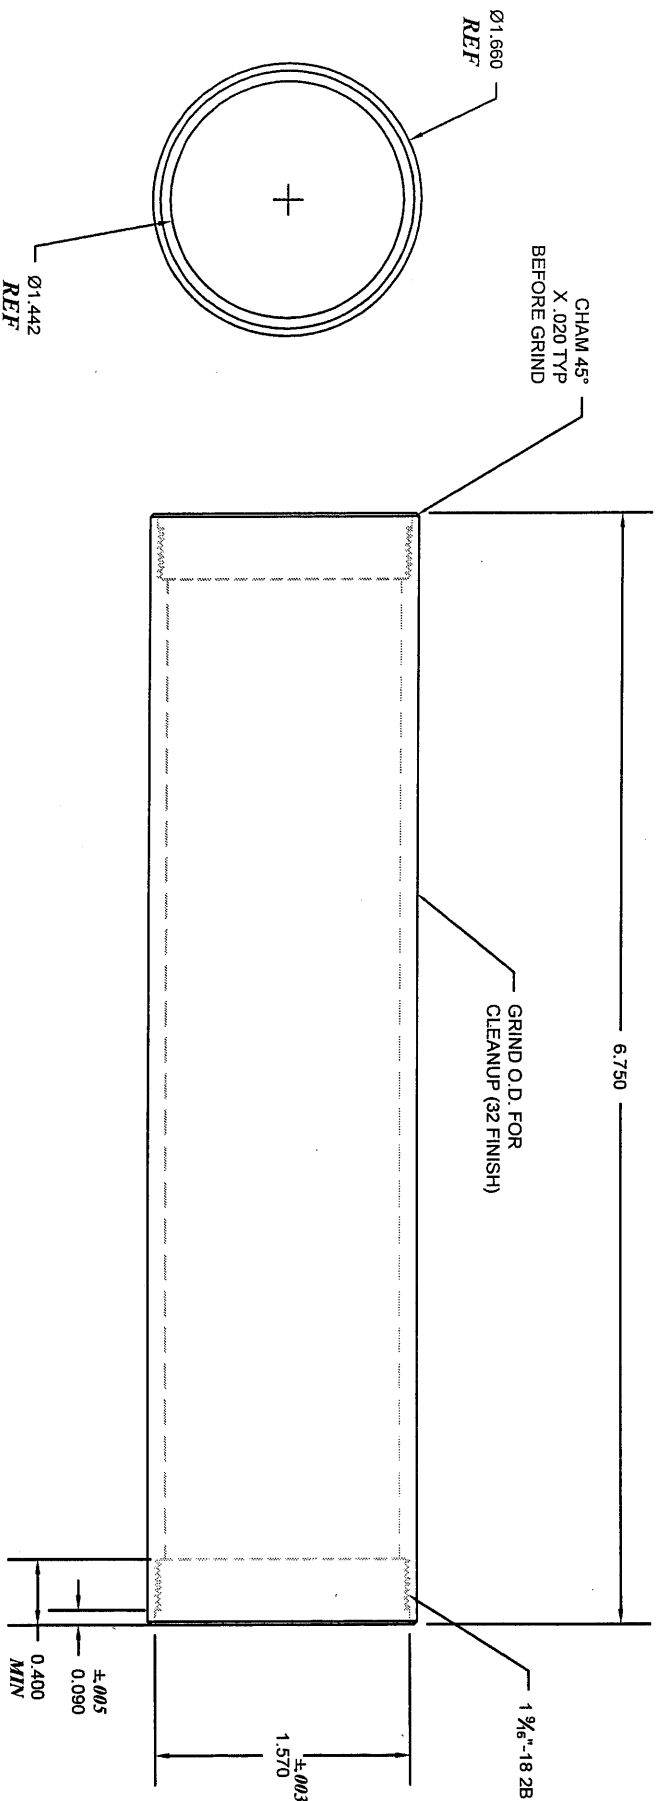

QUALITY ASSURED, INC

TOLERANCES UNLESS SPECIFIED
1. ACCORDING TO DECIMAL PLACES

XXX = ±.010
XX = ±.030

2. ANGLES: X° = ±1 Deg. 125 OR BETTER
3. SURFACE FINISH: 125 OR BETTER
4. BREAK ALL EDGES 45 Deg. x .010

DESC
.75-6 HOUSING

MATL: 1 1/2" SCH 10
304 S.S. TUBING
COMPOUND: xxxxxx
FILE NAME:

JOB NUMBER:

DESIGNED BY: P. Hundley
DRAWN BY: Garrett Hundley
CHKD BY:
APP BY:
DATE: 11/28/13
SCALE: SHT
REV: B
PART NO: Q4-7066-2