



TECNO

TYPICAL APPLICATIONS Cleaning and outdoor, small appliances, chainsaw, gardening

FUNCTIONS ■ SPST, momentary or not

CYCLE No. 50.000

CUT OUT 19x13 mm

AMBIENT TEMPERATURE 125 °C



GWT 850 °C

GWT NO FLAME (<2sec) 750 °C on demand





T E C N O ?

DRAWING

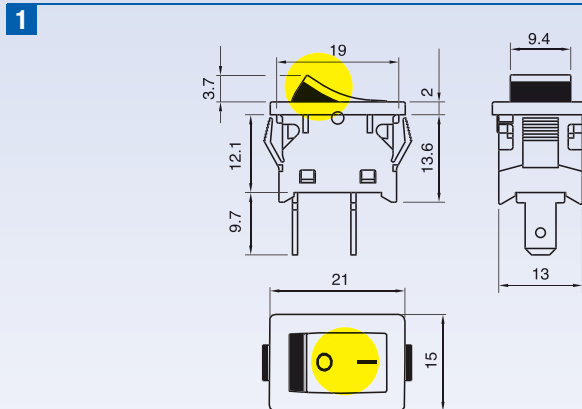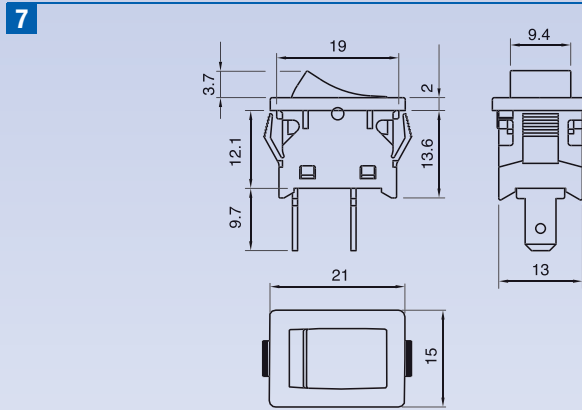

?

TERMINAL




NOTES

Water splash proof body


T E C N O 4


DRAWING

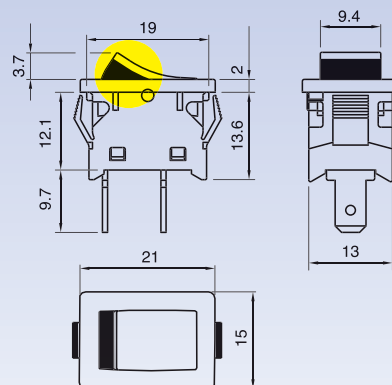

?

TERMINAL





Z	Y	X
0,75 ... 3,5	13,0	+0,2 0
		19,0
		+0,2 0

T	E	C	N	O	DRAWING	TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING
												0
												0
												0

?	?	?	?	?	?	?	0	0	0
---	---	---	---	---	---	---	---	---	---

FUNCTION RATING BODY COLOR ROCKER COLOUR MARKING COLOUR MARKING

1

1a ●
1

4 Drawing 7

1a ▲
1

A Drawing 7

1a ▲
1

3

10 (4) A / 250 VAC
10 / 100 A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125/55 °C
EN 61058

15 A / 125 VAC
T65 °C
UL 1054

1 black

X ? custom

1 black

X ? custom

Drawing 7

0 none

1 black

2 white

X ? custom

Drawing 1 Side and marking

9 red

0

1

3

X

Drawing 1 from mould

1

T	E	C	N	O	4	TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING
												0
												0

?	?	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---

FUNCTION RATING BODY COLOR ROCKER COLOUR MARKING COLOUR MARKING

1

1a ●
1

3

10 (4) A / 250 VAC
10 / 100 A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125/55 °C
EN 61058

15 A / 125 VAC
T65 °C
UL 1054

1 black

X ? custom

19 Top black Side red

XX ? ? custom

0 none

2 white

X ? custom

0

1

3

X