



DY1

TYPICAL APPLICATIONS Cooking, washing, coffee machines

FUNCTIONS

- SPST, momentary or not
- SPDT, momentary or not

CYCLE No. 50.000

CUT OUT Rear panel

AMBIENT TEMPERATURE 125 °C

GWT 850 °C

GWT NO FLAME (<2sec) 750 °C





D Y 1




?

DRAWING


TERMINAL

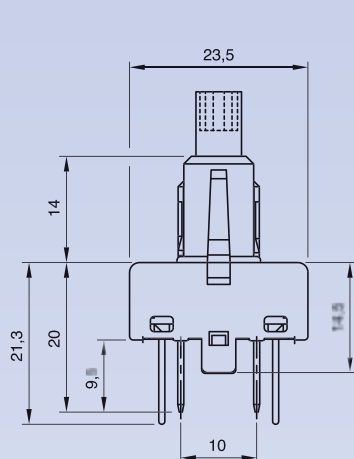


1

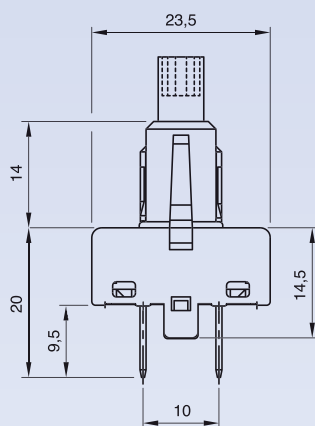

6






	TERMINAL	SHAFT	LATCHING FUNCTION	FUNCTION	RATING			
D	Y	1				0	0	0



?

SHAFT


E



G



K



?

LATCHING FUNCTION

S

Push to On - Push to Off



M


Momentary




? ?

FUNCTION


10



60



30



?

RATING

E

Function 10

16 (6) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
6 (2) A / 250 VAC
T150/55 °C
EN 61058

13 A / 250 VAC
3/4 HP - 250 VAC
1/3 HP - 125 VAC
T65 °C
UL 1054

Function 60

16 (6) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
EN 61058

13 A / 250 VAC
3/4 HP - 250 VAC
1/3 HP - 125 VAC
T65 °C
UL 1054

N

Function 30

12 (4) A / 250 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
μ disconnection
EN 61058

13 A / 250 VAC
3/4 HP - 250 VAC
1/3 HP - 125 VAC
T65 °C
UL 1054



DY2

TYPICAL APPLICATIONS Cooking, washing, coffee machines

FUNCTIONS

- DPST, momentary or not
- SPST+SPDT, momentary or not

CYCLE No. 50.000

CUT OUT Rear panel

AMBIENT TEMPERATURE 125 °C

GWT 850 °C

GWT NO FLAME (<2sec) 750 °C





D Y 2




?

DRAWING


TERMINAL

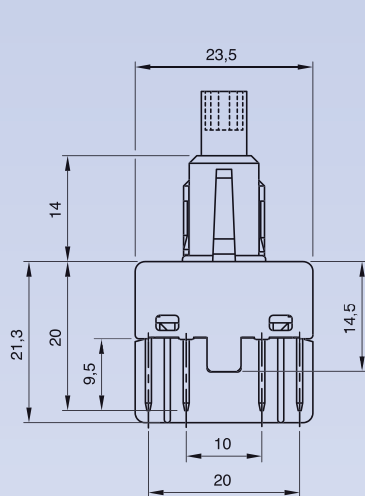

1

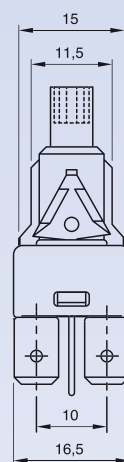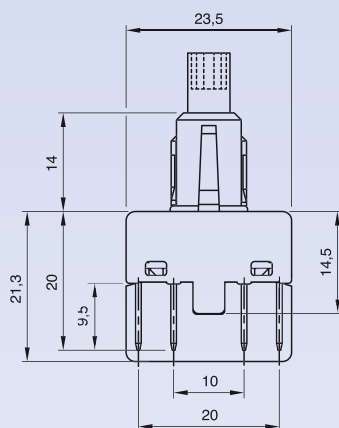

6





DYST

Accessories for DY series

TYPICAL APPLICATIONS Cooking, washing, coffee machines

CUT OUT See drawing

AMBIENT TEMPERATURE 125 °C

GWT 850 °C

				TYPE	BODY COLOUR				
D	Y	S	T			0	0	0	0

D	Y	S	T
---	---	---	---

?

?	0	0	0	0
---	---	---	---	---

CUT OUT


DRAWING

TYPE

BODY COLOUR

Oval body


5 Standard

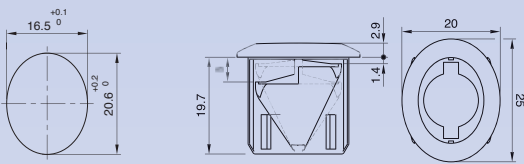

7 Painted

Round body with antirotation rib


1 Standard

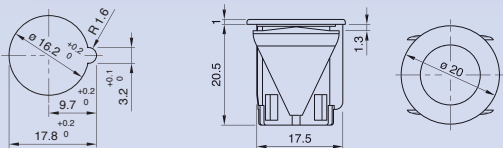

9 Painted

Round body


3 Standard

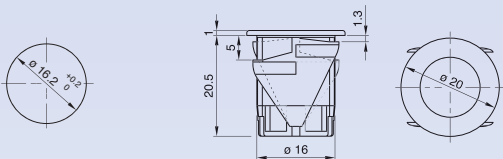

8 Painted

Soft Round body with antirotation rib


G Standard

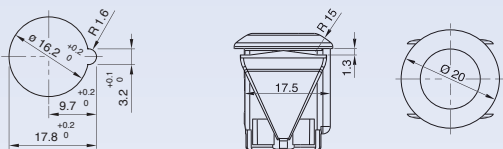

S Painted

Soft Round body

L Standard

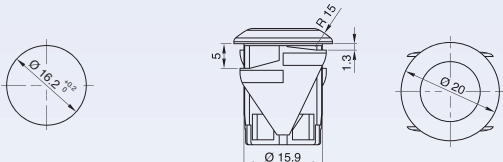

T Painted

Standard

1 black

2 white

Painted

1 chrome

X ? custom



DYT

Accessories for DY series

TYPICAL APPLICATIONS Cooking, washing, coffee machines

CUT OUT See drawing

AMBIENT TEMPERATURE 55 °C

GWT 850 °C

D	Y	T	TYPE	BUTTON COLOUR	MARKING COLOUR	MARKING	0	0

D	Y	T	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---	---

DRAWING


TYPE

BUTTON COLOUR

MARKING COLOUR

MARKING


Oval button



5K Standard

7K Painted


Round button



1K Standard

8K Painted

Soft Round button



3K Standard

9K Painted

Standard

1 black

2 white

Painted

1 chrome

X ? custom

0 none

1 black

2 white

X ? custom

0

X ?