# **Semi-Trash Pumps**



# 2-Inch

#### Frame:

- Heavy-duty powder coated wraparound frame with 1-inch steel tubing
- Rubber isolators minimize vibration


### Components:

- Silicon carbide mechanical seals
- Precision molded cast iron impeller and volute for reduced vibration and wear

## **Limited Warranties:**

- 1 year Mi-T-M engine
- 2 year pump
- 3 year Honda engine



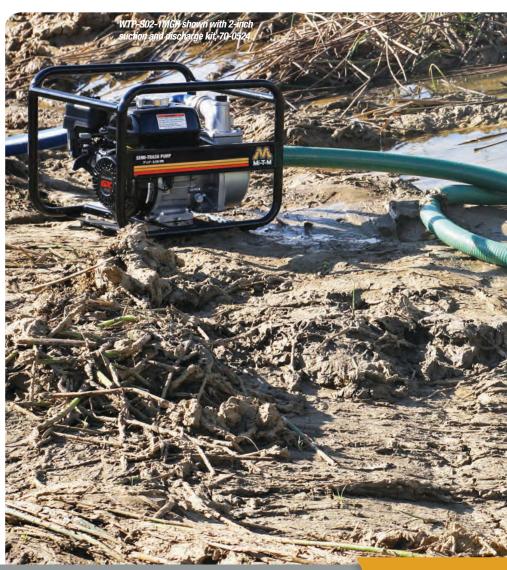

The compact, lightweight and portable Mi-T-M 2-inch semi-trash pump is an excellent choice for homeowners, hobby farmers, contractors or anyone who needs to remove water quickly and efficiently. This pump can handle solids up to ¾ inch.

	SUCTION									
MODEL NUMBER	DISCHARGE SIZE	MAX. TOTAL HEAD	SUCTION LIFT	DISPLACEMENT/ENGINE	PSI	MAX. CAPACITY	FUEL TANK CAPACITY	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
WTP-S02-1MGH	2in.x2in.	115ft.	28ft.	118cc Honda GX120 OHV	50	9,720 gph	0.53 gallon	20.5x17x16.25in.	71 lb.	62 lb.
WTP-S02-1MGM^	2in.x2in.	115ft.	28ft.	136cc Mi-T-M OHV	50	9,720 gph	0.71 gallon	20.5x17x16.25in.	72 lb.	63 lb.
WTP-S02-CMGM*	2in.x2in.	115ft.	28ft.	136cc Mi-T-M OHV	50	9,720 gph	0.71 gallon	20.5x17x16.25in.	72 lb.	63 lb.

## **Accessories:**

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
15-0293	20-ft. x 2-in. green PVC hard suction hose with fittings	All models	19-0628	2-in. steel suction strainer with round openings	All models
15-0295	50-ft. x 2-in. blue PVC soft discharge hose	All models	70-0524	2-in. suction and discharge kit	All models

<sup>^</sup>Model available in US only. \*Model available in US and Canada.



# **Semi-Trash Pumps**

# 3-Inch

#### Frame:

- Heavy-duty powder coated wraparound frame with 1-inch steel tubing
- Rubber isolators minimize vibration

### Components:

- Silicon carbide mechanical seals
- Precision molded cast iron impeller and volute for reduced vibration and wear

### **Limited Warranties:**

- 1 year Mi-T-M engine
- 2 year pump
- 3 year Honda engine





Handle unwanted water and debris on any jobsite with the powerful 3-inch semi-trash pumps. These models offer quality components like silicon carbide seals, rubber isolators to minimize vibration and a heavy-duty wraparound frame.

MODEL NUMBER	SUCTION DISCHARGE SIZE	MAX. TOTAL HEAD	SUCTION LIFT	DISPLACEMENT/ENGINE	PSI	MAX. CAPACITY	FUEL TANK CAPACITY	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
WTP-S03-1MGH	3in.x3in.	104ft.	28ft.	196cc Honda GX200 OHV	45	16,560 gph	0.83 gallon	21.25x17.25x18.25in.	82 lb.	73 lb.
WTP-S03-2MGM	3in.x3in.	104ft.	28ft.	212cc Mi-T-M OHV	45	16,560 gph	1.0 gallon	21.25x17.25x18.25in.	82 lb.	73 lb.

### Accessories:

PART NUMBER	DESCRIPTION	FITS MODELS	PART NUMBER	DESCRIPTION	FITS MODELS
15-0294	20-ft. x 3-in. green PVC hard suction hose with fittings	All models	19-0629	3-in. steel suction strainer with round openings	All models
15-0296	50-ft. x 3-in. blue PVC soft discharge hose	All models	70-0525	3-in. suction and discharge kit	All models