



CS

TYPICAL APPLICATIONS Hairdryers

FUNCTIONS ■ 2x SPST (3 positions 0-0/0-1/1-1)

CYCLE No. 50.000

CUT OUT See drawing

AMBIENT TEMPERATURE 85 °C

GWT 850 °C




C S


?

DRAWING


TERMINAL

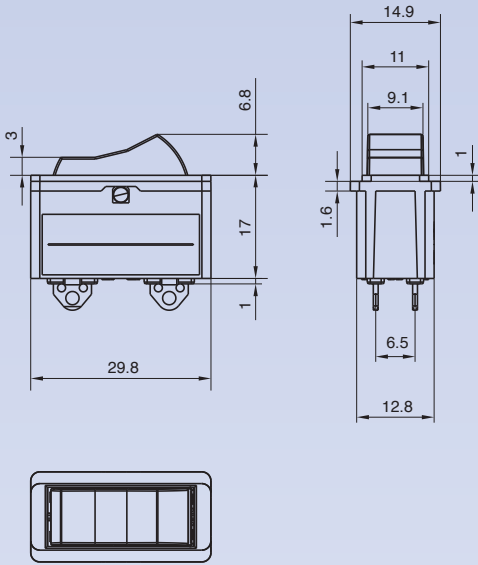


G



H





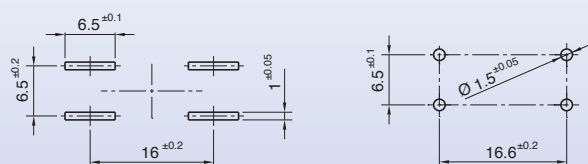


C	S	TERMINAL	FUNCTION	RATING	BODY COLOUR	BUTTON COLOUR	MARKING	MARKING COLOUR	0	0
---	---	----------	----------	--------	-------------	---------------	---------	----------------	---	---

?	?	?	?	?	?	?	?	?	0	0
---	---	---	---	---	---	---	---	---	---	---

FUNCTION RATING BODY COLOUR ROCKER COLOUR MARKING MARKING COLOUR

1



2

16 A / 250 VAC
10 A / 250 VAC - 5E4
T85/55 °C
µ disconnection
EN 61058

16 A / 125 VAC
T65 °C
UL 1054

1

black

1

black

0



A



C



X



0

none

2

white

X

custom

?