SXL5

TYPICAL APPLICATIONS	Vacuum cleaners, washing machines, dishwashers, hydrocleaners
FUNCTIONS	■ SPST, momentary or not ■ DPST, momentary or not
CYCLE No.	50.000
CUT OUT	Rear panel
AMBIENT TEMPERATURE	125 ºC
GWT	850 °C
GWT NO FLAME (<2sec)	750 °C

S	X	L	5	?

TRAVEL POSITION

OFF position



Max travel



ON position



DRAWING

1

Vertical tab terminals



Vertical PCB terminals

Single pole version

Double pole version

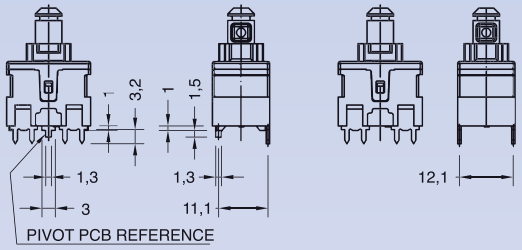

Horizontal tab terminals

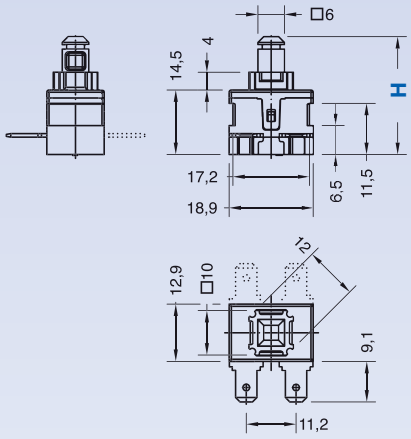

Horizontal PCB terminals

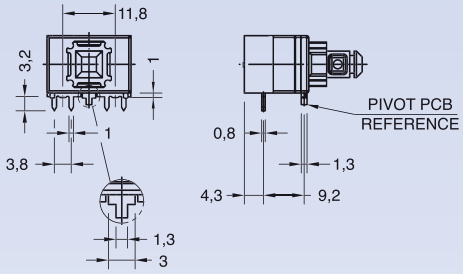

2



Wings fixing



3

Single pole version

Double pole version

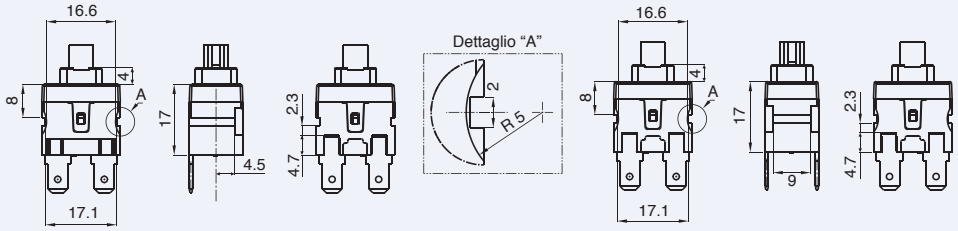







Horizontal PCB



Vertical PCB



DRAWING	TERMINAL	SHAFT	FUNCTION	RATING				
S X L 5					0	0	0	W

?	?	?	?	0	0	0	W

TERMINAL

1 Drawing 1 - 2 - 3
Vertical terminal
6.3x0.8

A Drawing 1 - 3
Horizontal terminal
6.3x0.8



2 Drawing 1 - 2 - 3
Vertical terminal
4.8x0.8

B Drawing 1 - 3
Horizontal terminal
4.8x0.8



4 Drawing 1 - 2
Vertical PCB terminal

D Drawing 1
Horizontal PCB
terminal
only function 1 - 4

SHAFT

A H = 26.5



B H = 28.5

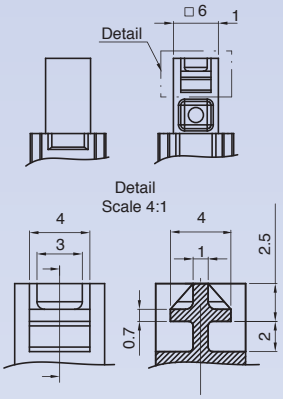

C H = 24



D H = 28.5

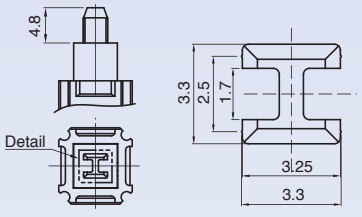

E H = 26.5



FUNCTION

1

2



4

7



RATING

H

12 (8) A / 250 VAC
16 (4) A / 250 VAC
10 (6) A / 250 - 5E4
T125/55 °C
EN 61058 / CQC

16 A - 125 / 250 VAC
3/4 HP - 125 / 250 VAC
T100 °C
UL 1054

9

12 (8) A / 250 VAC - 5E4
T85/55 °C
EN 61058

16 A - 125 / 250 VAC
3/4 HP - 125 / 250 VAC
T100 °C
UL 1054