

#whdentalwerk



video.wh.com

Now at
your dealer
or wh.com



Class B, simply profitable



lina

The essentials of sterilization

Simple and expandable.


Lina is one of the range of W&H sterilizers which offers maximum safety and an excellent price-performance ratio with its Class B cycles and a built-in USB data log.

Your advantages at a glance

- › The ECO B cycle reduces the cycle time by half
- › Low-noise operation with the patented water separation system
- › User-friendly keypad for simple navigation to all sterilization options
- › Built-in dust filter to protect internal components
- › Programmable cycle start
- › Excellent value for money
- › Integrated automatic water filling valve (optional)
- › Automatic digital cycle recording on USB stick (optional)



lina

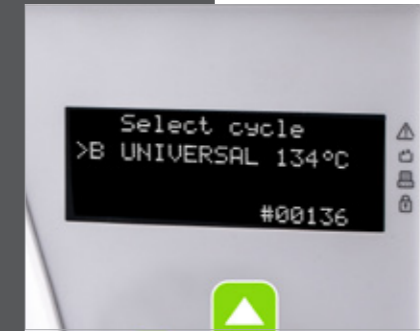

Class B cycles exclusively

The Lina sterilizer works exclusively with Class B cycles and with short ECO B cycles for smaller loads.



Simple navigation

All sterilization options are easily accessible with the easily operated keypad.



ECO B sterilization program

The cycle time can be reduced by half for small loads.



Built-in data log

The built-in data log means that sterilization cycles can be saved to a USB stick without needing cables and external boxes.



Barcode label printer

The LisaSafe label printer can be connected to the sterilizer to print barcodes. Combined with the built-in data log your traceability system is enhanced.

Technical data

Lina sterilization cycles

| | | B-Universal 134 | | | B-Prion 134 | | | B-Universal 121 |
|---|----------------|--|-----------|--------------|-------------|-----------|--------------|-----------------|
| Temperature | | 134 °C | | | 134 °C | | | 121 °C |
| Holding time | | 3.5' | | | 18' | | | 15' |
| Total cycle duration including drying | | ECO-B | Full Load | Typical Load | ECO-B | Full Load | Typical Load | Full Load |
| | Lina 17 | 29' | 54' | 49' | 44' | 69' | 64' | 75' |
| | Lina 22 | 33' | 64' | 55' | 48' | 79' | 70' | 79' |
| Max solid: ECO/full/typical loads/ Max porous load | | Lina 17: 0.5kg / 4kg / 2kg / 1.5kg Lina 22: 0.5kg / 5kg / 2kg / 1.8kg | | | | | | |
| Test cycles | | Helix/Bowie Dick/Vacuum test | | | | | | |

CE CE
0051 0497

| Type: | Lina 17 PRO13-003-17 | Lina 22 PRO13-003-22 |
|---|---|-------------------------|
| Chamber size: | 17 l | 22 l |
| Power supply: | 200 – 240 Vac 50 / 60 Hz; 10 A | |
| Power consumption | 2 kW | |
| Dimensions overall (W x H x D): | 450 x 435 x 599 mm | |
| Weight: | 39 kg | 40 kg |
| Main/Used water tanks: | 4 / 3.5 litres | |
| Working range: | 5 to 10 cycles | |
| Usable space in chamber (W x H x D): | 195 x 195 x 297 mm | 195 x 195 x 390 mm |
| Connection type: | 1 serial port, 1 USB + 1 serial (optional), integrated automatic water filling valve (optional) | |

Lina sterilizers were designed, certified and validated with the most stringent Directives and Standards:

| | |
|-----------------------|--|
| 93/42/EEC | Medical Device Directive |
| 2014/68/EU | Pressure equipment Directive |
| EN ISO 17665-1 | Validation and routine control |
| EN 13060 | Small steam sterilizer |
| EN 61326 | Electromagnetic compatibility |
| EN 61010-1 | Safety requirements |
| EN 61010-2-040 | Specific requirements for steam sterilizer |

W&H Sterilization Srl.
Via Bolgara, 2
24060 Brusaporto (BG), Italy
t +39 035-66 63 000
f +39 035-50 96 988
office.sterilization@wh.com
wh.com

Pictures are for illustrative purposes only. Additional equipment and accessories shown are not included as standard.

20409 AEN Rev. 008 / 31.01.2019
Subject to alterations