



A1

TYPICAL APPLICATIONS Small appliances

FUNCTIONS

- SPST, momentary or not
- SPDT, momentary or not

CYCLE No. 50.000

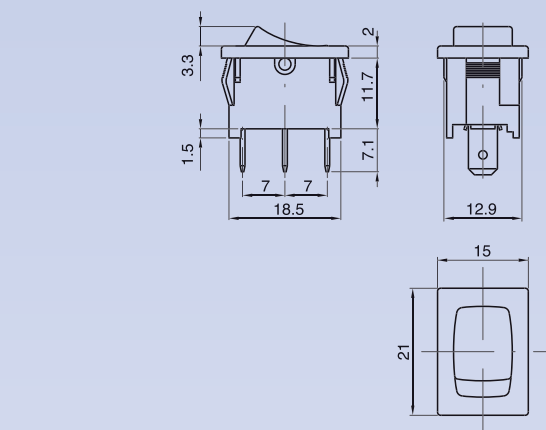







CUT OUT 19x13 mm

AMBIENT TEMPERATURE 125 °C

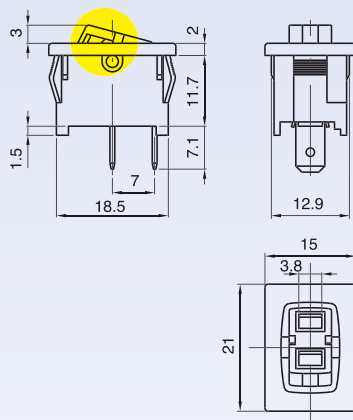
GWT 850 °C

GWT NO FLAME (<2sec) 750 °C on demand



DRAWING


1

2

A

7

8

9

E


CUSTOMIZABLE


A1PRT


WATERPROOF CAP



Z	Y	X
0,75 ... 1,25	13,0 ±0,1	19,0 ±0,1
1,25 ... 2,0	13,0 ±0,1	19,3 ±0,2
2,0 ... 3,0	13,0 ±0,1	19,6 ±0,2

TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING
A	1					
						0 0 0

?	?	?	?	?	?	0 0 0
---	---	---	---	---	---	-------

FUNCTION

RATING

BODY COLOUR

ROCKER COLOUR

MARKING COLOUR

MARKING

1



3

Terminal 1 - 2 - 9 - E



4

Terminal 1 - 2 - 7 - 8



A

Terminal 1 - 2 - 7 - 8



B

Terminal 1 - 2



2

Terminal 1 - 2

Function 4 - A - B

6 (2) A / 250 VAC
 3 (1) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 EN 61058

6 A - 125 / 250 VAC
 1/10 HP - 125 VAC
 1/6 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

3

Terminal 1 - 2 - 7 - 8 - 9 - A - E
 Function 1 - 3

10 (4) A / 250 VAC
 6 (6) A / 250 VAC
 6 (4) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 EN 61058

10 A - 125 / 250 VAC
 1/3 HP - 125 VAC
 1/2 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

7

Terminal 7 - 8

Function 4 - A

10 (2) A / 250 VAC
 6 (1) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 EN 61058

10 A - 125 / 250 VAC
 1/10 HP - 125 VAC
 1/6 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

B

Terminal 1 - 2 - 9 - E
 Function 1 - 3

13 (4) A / 250 VAC
 6 (6) A / 250 VAC - 5E4
 T125/55 °C - T125 °C
 EN 61058

15 A / 125 VAC
 10 A / 250 VAC
 1/3 HP - 125 VAC
 1/2 HP - 250 VAC
 T105 °C
 UL 1054
 CSA C22.2

1

black

2

white

9

red

X

custom

1

black

2

white

9

red

X

custom

0

none

1

black

2

white

5

grey

7

light blue

8

red

9

orange

X

custom

0



1



2



3



4



5



6



8



C



F



G



Z



R



X





A1

TYPICAL APPLICATIONS

Small appliances

FUNCTIONS

- SPST, illuminated or not
- SPDT
- SPCO

CYCLE No.

50.000

CUT OUT

19x13 mm

AMBIENT TEMPERATURE

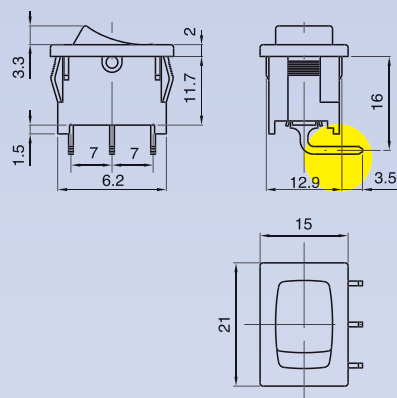

125 °C

GWT

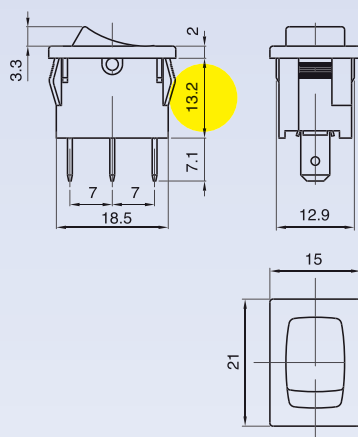


850 °C


GWT NO FLAME (<2sec)

750 °C on demand


DRAWING
TERMINAL

C

A1PRT


WATERPROOF CAP


1

2




Z	Y	X
0,75 ... 1,25	13,0 ±0,1	19,0 ±0,1
1,25 ... 2,0	13,0 ±0,1	19,3 ±0,2
2,0 ... 3,0	13,0 ±0,1	19,6 ±0,2

TERMINAL	FUNCTION	RATING	BODY COLOUR	ROCKER COLOUR	MARKING COLOUR	MARKING
A	1					0 0 0

?	?	?	?	?	?	0 0 0
---	---	---	---	---	---	-------

FUNCTION

RATING

BODY COLOUR

ROCKER COLOUR

MARKING COLOUR

MARKING

1 Terminal C



3 Terminal C



5 Terminal 1 - 2



6 Terminal 1 - 2



3

Terminal 1 - 2 - C
Function 1 - 3 - 6

10 (4) A / 250 VAC
6 (6) A / 250 VAC
6 (4) A / 250 VAC - 5E4
T125/55 °C - T125 °C
EN 61058

10 A - 125 / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

6

Terminal 1 - 2
Function 5

10 (2) A / 250 VAC
6 (1) A / 250 VAC - 5E4
T125/55 °C - T125 °C
μ disconnection
EN 61058

6 A - 125 / 250 VAC
1/8 HP - 125 VAC
1/6 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

B

Terminal 1
Function 6

13 (4) A / 250 VAC
6 (6) A / 250 VAC - 5E4
T125/55 °C - T125 °C
EN 61058

15 A / 125 VAC
10 A / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

Terminal 1 - 2
Function 5

13 (4) A / 250 VAC
6 (6) A / 250 VAC - 5E4
T125/55 °C - T125 °C
μ disconnection
EN 61058

15 A / 125 VAC
10 A / 250 VAC
1/3 HP - 125 VAC
1/2 HP - 250 VAC
T105 °C
UL 1054
CSA C22.2

1

black

2

white

9

red

X

custom

1

black

2

white

9

red

G

red

H

orange

E

green

L

white

X

custom

0

none

1

black

2

white

5

grey

7

light blue

8

red

9

orange

X

custom

0



1



2



3



4



5



6



8



9



C



F



G



Z



S



R



X

