

INSERT 60

PELLET INSERT



Is the ideal solution for those who wish to make use of an existing, unused fireplace, for those who can't resist the charm of a fireplace but want the convenience of a pellet heater. Equipped with a curved firebox glass for a wider view of the fire.

Heatable area

96 m².







- 1 - Easy access to the pellet tank, even during the working phase (fast rigid mobile kit)
- 2 - Cool touch door handle
- 3 - Removable spacious ash tray
- 4 - Cast iron firebox door with curved ceramic glass
- 5 - Reinforced rails included for extraction



OPTIONAL ACCESSORIES

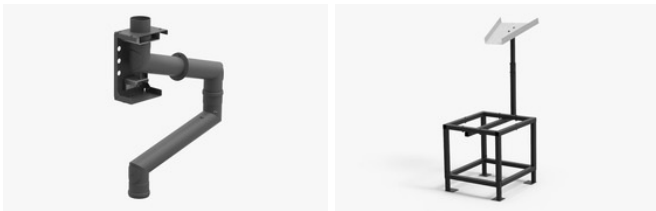

DIMENSIONS

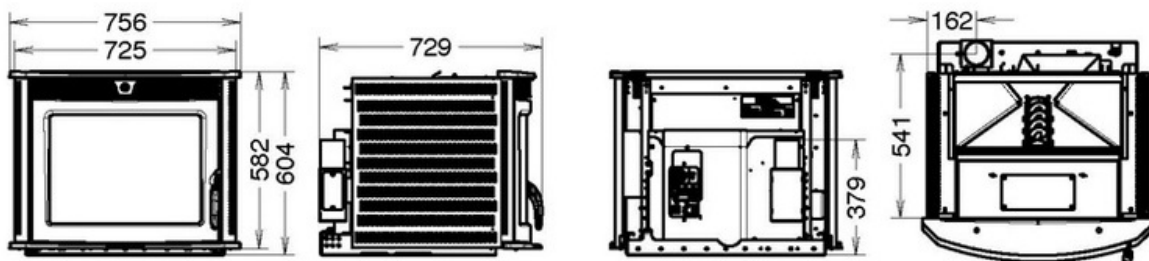

TECHNICAL DATA

DIMENSIONS (HXWXD)	604X756X729
WEIGHT (KG)	159
HEATABLE AREA (M ²)*A*C	96
EFFICIENCY UP TO MAX (%)*A	92,0%

ENERGY CLASS	A+
POWER TO THE HEART (KW)*A	4,8 - 12
RATED POWER (KW)*A	4,4 - 10,7
POWER TO THE WATER (KW)*A	-
RADIATION (KW)*A	-
HOURLY PELLETT CONSUMPTION (KG/H)*A	0,8 - 2,4
WOOD HOURLY CONSUMPTION (KG/H)*A	-
PELLET HOPPER CAPACITY (KG)*A	19,0
WARM AIR DUCTING	-
MAXIMUM SINGLE DUCTING OUTLET (M)	-
PATENTED BURNER PELLETPOWER®	-
ROOM VENTILATION	SI
PRIMARY AIR FROM OUTSIDE	-
CO EMISSIONS (MG/M ³ ; 13% OF O ₂)*A	133
CO EMISSIONS (MG/M ³ ; 10% OF O ₂)*A	-
DUST EMISSIONS (MG/M ³ ; 13% OF O ₂)*A	15
DUST EMISSIONS (MG/M ³ ; 10% OF O ₂)*A	-
SILENCE (DB)	36
REMOTE CONTROL	SI
RADIO CONTROL WITH ROOM TEMPERATURE THERMOSTAT	-
WEEKLY PROGRAMMER (3 DAILY LIGHTING)	SI
«SMART INFO» FUNCTION	-
SYSTEM CIRCULATING PUMP	-
EXPANSION TANK	-
OVER PRESSURE VALVE	-
FLUE GASEXHAUST DIAMETER (MM)	80
MIN. FLUE DRAUGHT PRESSURE (PA)	10
ELECTRIC CONSUMPTION (WATT)	70-270
HIGH TEMPERATURE SAFETY THERMOSTAT	SI

*A EMISSIONS AND PERFORMANCE DATA MAY CHANGE ACCORDING TO THE FUEL USED. THE VALUES OF PELLETT PRODUCTS HAVE BEEN OBTAINED BY USING CERTIFIED FUEL ACCORDING TO EN 14961-2 A1-A2 NORM. WOOD LOGS PRODUCTS VALUES MAY VARY ACCORDING TO THE TYPE AND QUALITY OF THE WOOD LOGS USED.

*B PROVISIONAL DATA UNDER CERTIFICATION

*C IMPORTANT: WHEN CALCULATING THE VOLUME OF THE "HEATED AREA" SOME RELEVANT ASPECTS MUST BE CONSIDERED: INSULATION OF THE BUILDING (ENERGY CLASS), POSITION OF THE HEATER, CLIMATIC AREA AND MORE ASPECTS THAT CAN AFFECT THE VALUES OF PERFORMANCE. REPORTED DATA HAVE BEEN CALCULATED ON THE BASE OF ROOF NOT HIGHER THAN 3 MTS.

THE MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES WITHOUT PREVIOUS NOTICE.

THERMOROSSI S.p.A.

Via Grumolo, 4 | 36011 Arsiero (VI) | Italy | E-mail: info@thermorossi.it

Tel: 800.44.88.77 | Fax: 0445 741657 | P.IVA 00168470243 | Iscr. REA99797 Vicenza | Cap. Sociale di 156,000,00 I.v.

