


# ANSI Grade 1 156.3 Panic Hardware Rim Type & Vertical Rod Exit Devices



**8000 Series**  
**8100 Series**

**10 YEAR**  
**WARRANTY**

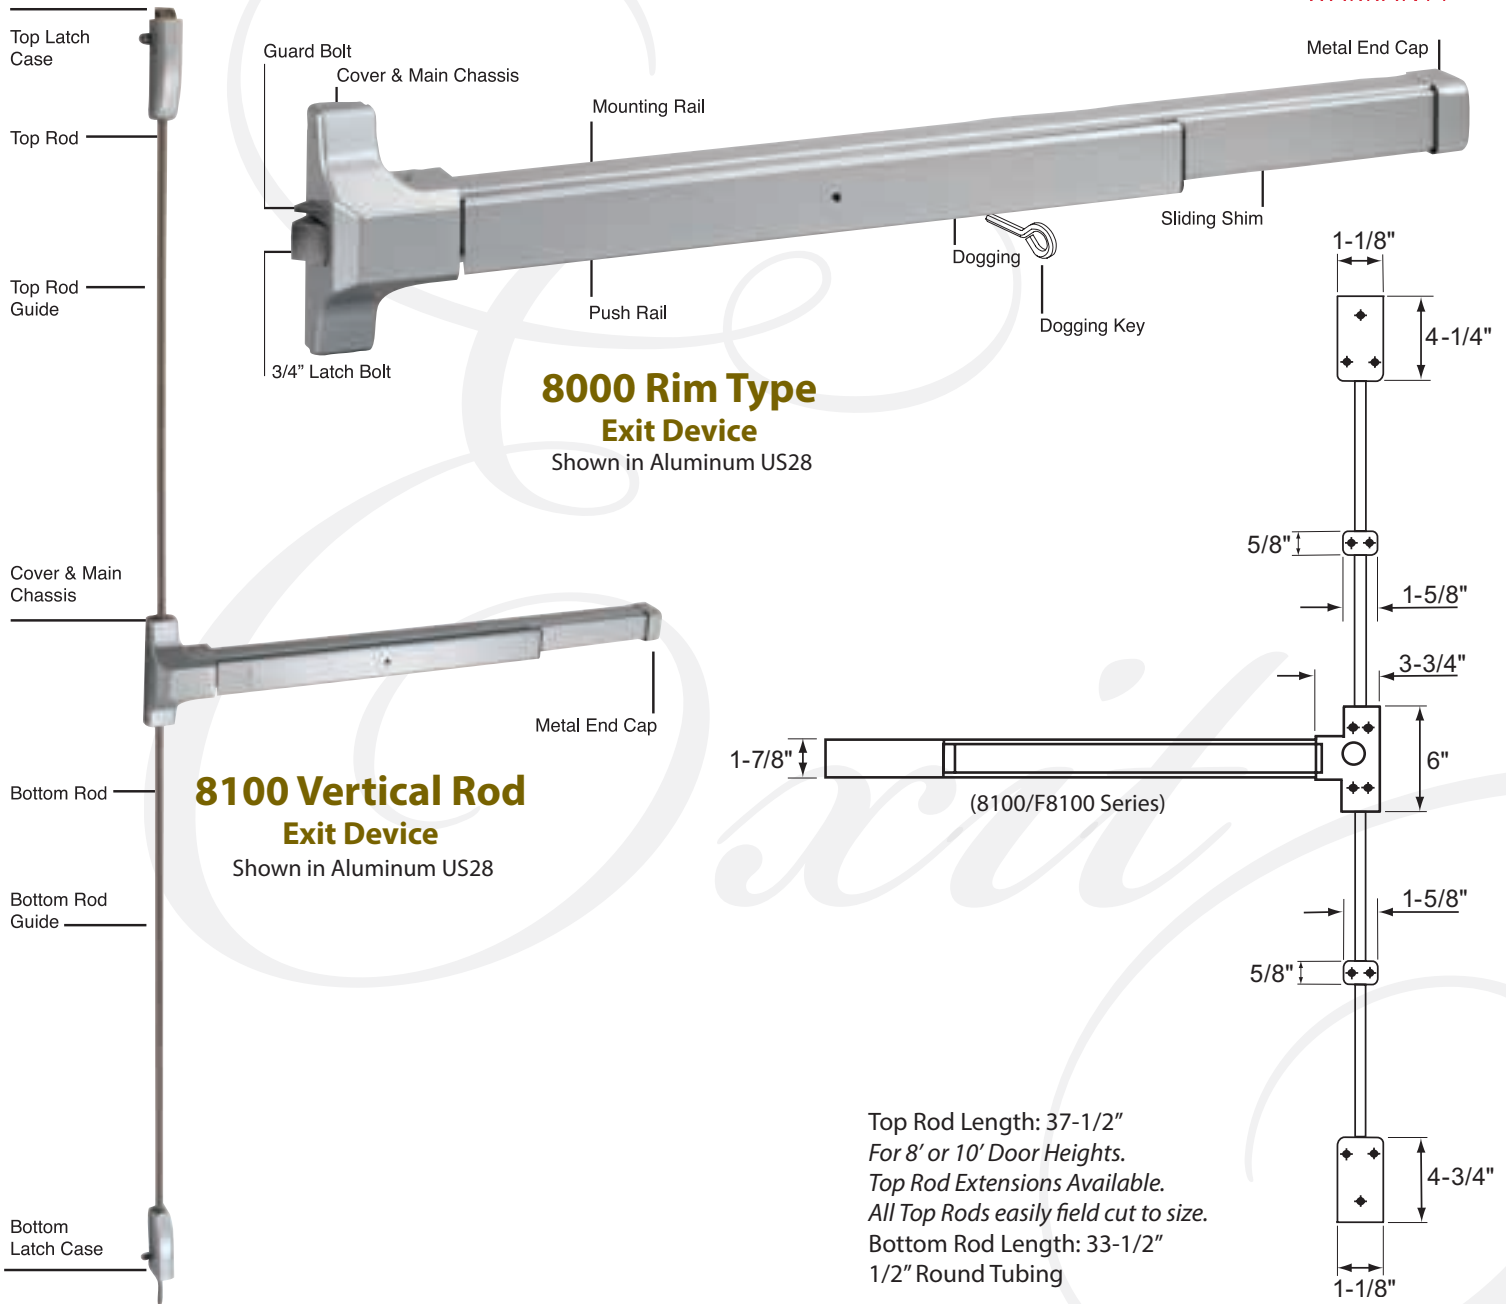

Top Rod Length: 37-1/2"  
For 8' or 10' Door Heights.  
Top Rod Extensions Available.  
All Top Rods easily field cut to size.  
Bottom Rod Length: 33-1/2"  
1/2" Round Tubing

## PRODUCT FEATURES

- Will cover stock hollow metal doors with 161 cutout.
- Hex Key Dogging feature standard.
- Outside Pull or Lever trim available (See Trim page for options).
- Non Handed (8000 Series)
- Reversible (8100 Series)

## FINISHES AVAILABLE

US CODE	DESCRIPTION
US28	Aluminum
US32D	Stainless Steel
DURO	Duro Bronze

## PRODUCT SPECIFICATIONS

**APPLICATIONS:** For offices, schools, hospitals, apartments, hotel/motels, and other public buildings.

**DOOR THICKNESS:** 1-3/4" ~ 2" standard, 2-1/4" optional.

**8000 SERIES DOOR SIZE:** 33" to 36". Bar easily field cut to size.

**8100 SERIES DOOR SIZE:** 33" to 36" x 84". Top Rod Extension available.

**STILE WIDTH:** 4-1/2" minimum stile width required for 8000 Series. 3-1/2" minimum stile width required for 8100 Series.

**CHASSIS, END CAP & RAIL ASSEMBLY:** Painted steel (Aluminum or Duro) or stainless steel (US32D).

**COVER:** Zinc Alloy

**LATCHBOLT:** Zinc with 3/4" throw (8000 Series). Zinc (8100 Series).

**LATCHBOLT SPRING:** Stainless steel throughout.

**GUARD BOLT:** Stainless steel (8000 Series only).

**8000 SERIES STRIKE:** #8170 Steel Roller Strike – 2-3/4" Backset. Optional Strike #8070 for 2-3/8" Backset.

**8100 SERIES STRIKE:** #8171 Steel Strike for Top Case. #8172 Zinc Strike for Bottom Case.

**MOUNTING:** Furnished standard with wood & machine screws. Sex nuts and bolts (1346) optional.

**UL & ULC LISTED:** Complies with UL 305 standards. Listed for safety as Panic Hardware.