

No.521

Wallmount Displays



Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required ,and you can run the third party Digital Signage software via the Android PC board too.

Giant Tablet Styling

Designed as one giant tablet. The sleek and sexy look is achieved with a striking aluminium surround and stunning IPX1 rated edge-to-edge glass.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Portable Design

The bracket could be fold to make the full side of kiosk small, and easy to allow

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7 Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer



Free Wall Mount



Landscape or Portrait Orientation

Product Advantages

Interactive Touch Monitor Portable Advertising Display

With over one million hits lifetime high performance resistors, capacitors, infrared touch screen without using the mouse and keyboard, just gently with your finger across the screen or click on the computer all operations can be achieved, so that the computer easier to use.




Product Features



Slim Body

Super slim thickness display

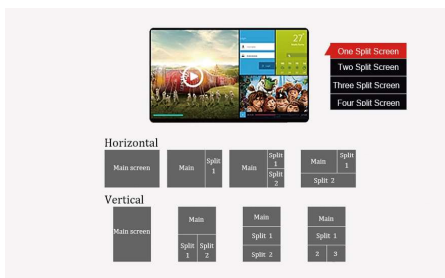

Intelligent Display

Supports splitting the screen into multiple windows with different content being reproduced in each of them.



Safety display

Higher Security Toughened Glass



The Easiest Digital Singnage

USB Directly Playing
Pop Android Sytem
The Lightest Portable AD Player



Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.




Play & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.

Specifications

Model		No.521			
Panel	Display Size(inch)		43"	49"	55"
	Type		60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution		1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)		941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio		16:09	16:09	16:09
	Brightness(cd/m2)		300nit	300nit	350nit
	Contrast Ratio(Typ.)		1200:1	1500:1	4000:1
	Viewing Angle(H/V)		178:178	178:178	178:178
	Color		16.7M	16.7M	16.7M
	Pixel Pitch(mm)		0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)		6ms	6ms	6ms
	Display Colors		10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour		24/7	24/7	24/7
	Haze		44%	25%	25%
Sound	Audio Output		5W, 8Ω (2 sets),Dual-channel stereo audio output		
Power	Type		Internal	Internal	Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Power Consumption	Max[W/h]	154	156	187
		Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
Off mode		less than 0.5W	less than 0.5W	less than 0.5W	
Mechanical Spec	Protection Glass		Yes	Yes	Yes
	Stand Type		Wallmount	Wallmount	Wallmount
Environmental	Operating Temperature		0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature		0°C~45°C	-30°C~55°C	-30°C~55°C
	Operating Humidity		-30°C~55°C	10~80%	10~80%
	Storage Humidity		10~80%	5% ~ 95%	5% ~ 95%
Android Media Player	Processor		RK3288, Quad core		
	RAM		2G		
	Memory		Built-in FLASH memory 8G		
	USB		USB2.0 HOST(X3)		
	LAN		10M/100M Ethernet(Network version screen only)		
	External memory		8GB SD card(up to 32G)		
	Multimedia		Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
	Media Resolution		3840*2160		
	Wi-Fi		802.11b/g/n Ethernet(Network version screen only)		
	Operating System		Android 7.0		
Certification	Safety		CE FCC ROHS		
Accessories	Include		Wall mount bracket,Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance		1 Year (2-3 years optional)		
	Type of packaging		Carton box /honeycomb box + wooden case		

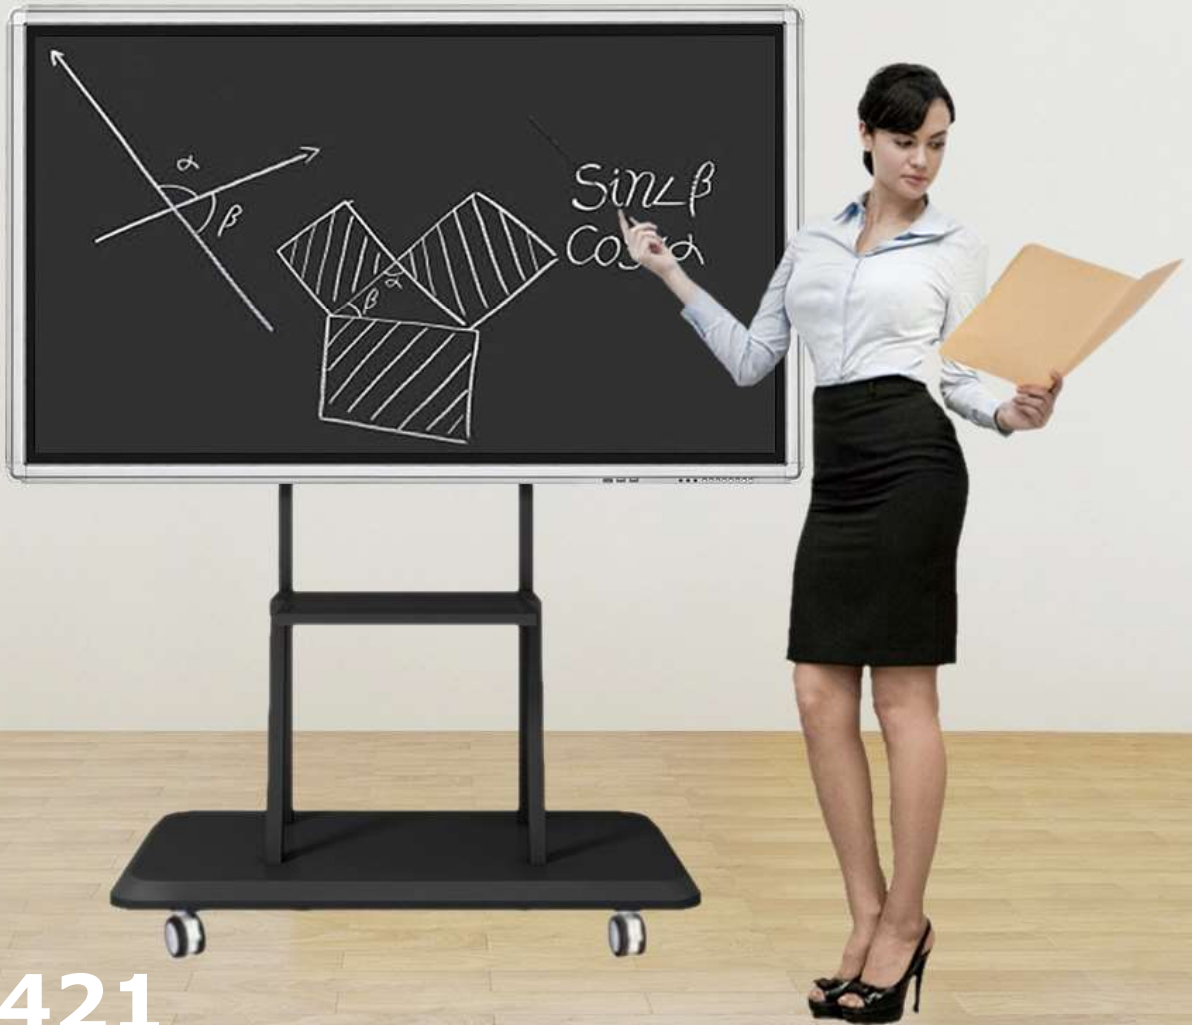

No.421

Interactive Touch Whiteboard

Dual OS

Experience the most versatile commercial Touch Screen on the market. With both Android and Windows operating systems installed on the integrated PC it cannot be beaten on flexibility. Seamlessly switch from your Windows desktop to the Android apps; this screen has it all in one convenient package. A windows license will need to be purchased separately.

Infrared Touch

Infrared Touch Screens use the most robust and durable touch technology available. Designed for commercial use, infrared touch technology works by embedding LED lights and sensors into the bezel of a monitor above the glass. These LEDs beam a signal across to the corresponding sensor on the other side forming an invisible grid. When the grid is broken by a finger, or other solid object, the sensors can detect the touch point. Infrared Touch Screens are by far the most cost effective solution on the market.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan of 50,000 hours.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Optional OS

The screen could have both windows and android operating systems on it.

Portrait/ Landscape Orientation

The screen can be used in either a landscape or portrait orientation depending on your requirement.

10 Point IR Touch Technology

Using the most responsive and sensitive commercial touch technology available. Not affected by dust or debris on the screen surface.



Integrated
Dual OS



24/7 Usage



Integrates
Wi-Fi



IPS panel
Technology



LED Backlight




Touch Screen
Upgrade



Landscape or Portrait
Orientation

Product Advantages

School educations, corporate trainings, office conferences, business presentations etc.
School equipment visual presentation digital interactive whiteboard for kids

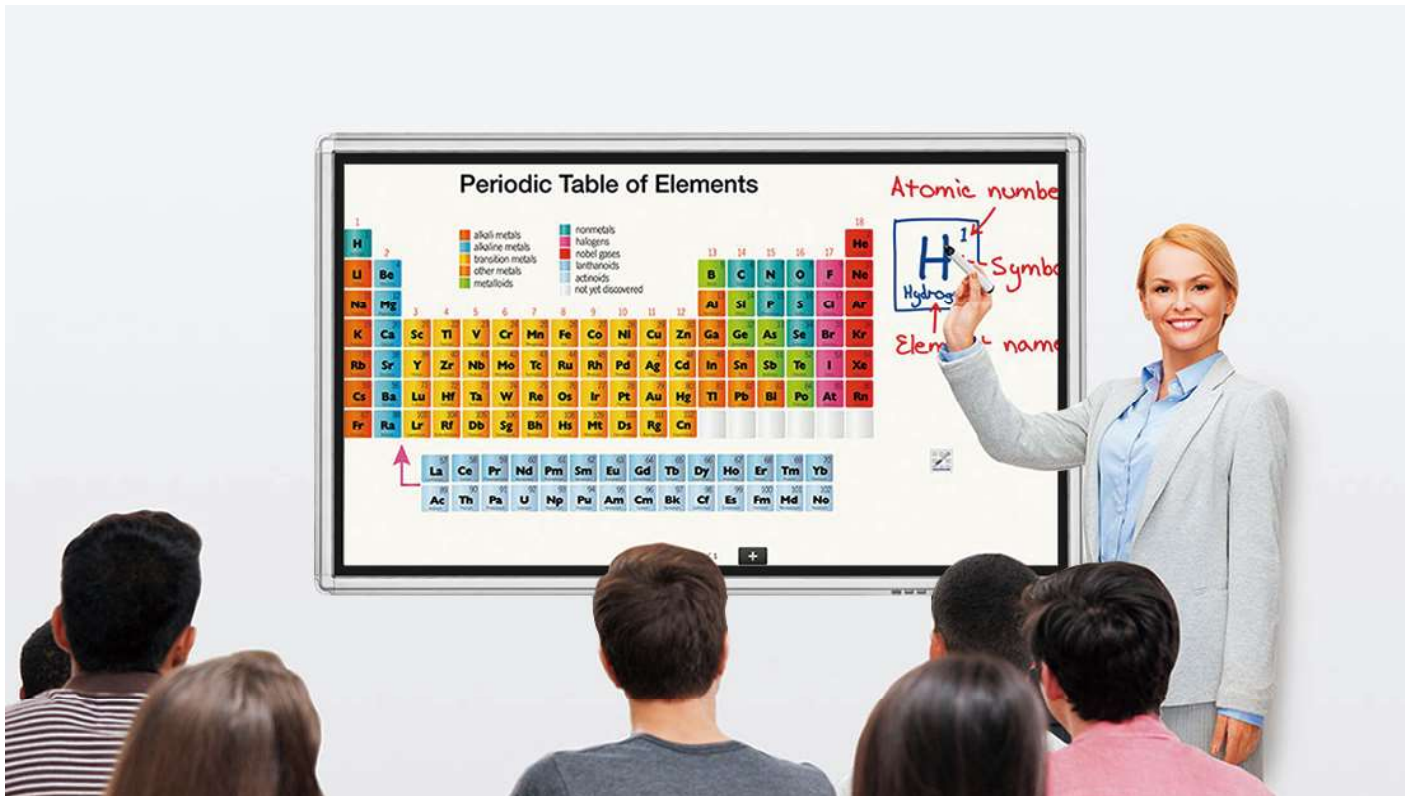

Product Features




Windows & Android inside

Could change the OS within 1 second via touch button



Brush Finish Surface

Aluminium frame with brush finish treatment



Interactive

10 touch points for the IR touch screen, allows few person to operate at one time.



Multiple Connectors

Multiple signal input connectos, enough option for the signal input.



Functional Buttons

All the buttons on the front bottom side bezel, easy to operate.



Free Presentation Software

Integerated a great presentation software inside, which whiteboard, screen share functions all for free!

Specifications

Model		No.421					
Panel	Display Size(inch)	49"	55"	65"	75"	86"	98"
	Type	60Hz E-LED BLU					
	Resolution	1920x1080 (16:09)					
	Active Display Area(mm)	1073.5*603	1209.6*680.4	1428.4*803.5	1650.24*928.26	1938.2*1098.3	2158*1214
	Aspect Ratio	16:09					
	Brightness(cd/m2)	350nit	350nit	350nit	400nit	500nit	500nit
	Contrast Ratio(Typ.)	1000:1	5000:1	5000:1	1000:1	5000:1	5000:1
	Viewing Angle(H/V)	178:178					
	Color	16.7M					
	Response Time(G-to-G)	6ms					
	Display Colors	10bit Dithering - 1.07Billion					
	Operation Hour	24/7					
Sound	Audio Output	5W, 8Ω (2 sets),Dual-channel stereo audio output					
Power	Type	Internal					
	Power Supply	AC 100 - 240 V~ (+/- 10 %),50/60 Hz					
	Power Consumption	Sleep mode	less than 0.5W				
Off mode		less than 0.5W					
Mechanical Spec	Protection Glass	N/A					
	Stand Type	Foot Stand/Wall mount bracket					
Environmental	Operating Temperature	0°C~45°C					
	Storage Temperature	-30°C~55°C					
	Operating Humidity	10~80%					
	Storage Humidity	5% ~ 95%					
OS	Android Media Player	Processor	Rockchip®, RK3368 (1.5GHz, Octa core)				
		RAM	2G				
		Flash	8G EMMC				
		USB	USB2.0 HOST(X2)				
		Input	HDMI/ AV/ VGA				
		LAN	10M/100M Ethernet(Network version screen only)				
		External memory	8GB SD card(up to 32G)				
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)				
		Media Resolution	3840*2160				
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)				
	Operating System	Android 7.1.2					
	PC is OPS (Open Pluggable Specifications)	Processor	Intel® i3 second or third generation processor (3.0GHz, dual core)				
		RAM	4G DDR3				
		Storage	500G HDD				
		Connection	Ethernet port (RJ45), WiFi, Bluetooth (optional)				
		I/O	DC 12V*1, RJ45*1, VGA*1(output), USB*4, HDMI*1(output), Audio*1(output), Microphone(input)				
		Operating System	Windows				
Certification	Safety	CE FCC ROHS					
Accessories	Include	Wall mount bracket, presentation software, Remote control, Key, Power cable, SD card					
	Quality assurance	1 Year (2-3 years optional)					
	Type of packaging	Carton box /honeycomb box + wooden case					



Pro-Cap Touch Display

No.521T

Pro-Cap Touch

State of the art projected capacitive interactive technology offers the most responsive and sensitive touch experience available. Designed for commercial applications, ProCap touch technology works by fixing a sensor grid between a layer of cover glass and the LCD panel, when a finger touches the glass the grid detects the coordinates of the touch point. Unlike other touch technologies ProCap is not affected by dust or debris on the screen surface allows for up to 10 touch points and offers superior optical quality.

Giant Tablet

These displays could be considered the largest commercial tablet on the market; but they are so much more. With a striking aluminium bezel and a sleek and sexy design, these displays always manage to catch the eye. Built with a strong tempered edge to edge glass front and a wide viewing angle, these commercial grade tablets are hard to miss and certainly stand out from the crowd.

Giant Tablet Styling

Designed as one giant tablet. The sleek and sexy look is achieved with a striking aluminium surround and stunning IPX1 rated edge-to-edge glass.

10 Point PCAP Touch Technology

Using the most responsive and sensitive commercial touch technology available. Not affected by dust or debris on the screen surface.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Portrait/ Landscape

The screen can be used in either a landscape or portrait orientation depending on your requirement.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 50,000 hours.



24/7Usage



IPS panel
Technology



Integrates
Wi-Fi



IPS panel
Technology



LED Backlight



Touch Screen
Upgrade



Landscape or Portrait
Orientation

Product Advantages

Achieve compelling customer engagement through touchscreen displays

Pro-Cap Touch Display combine the visual power of its signage with the touch-driven efficiency of its interactive offerings to better serve the needs of retail, public, corporate and transportation environments, among others.




Product Features



Interactive

10 touch points for the sensitive Pro-Cap touch screen.

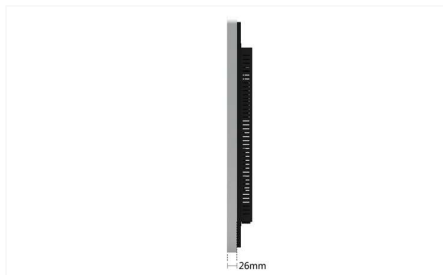

Slim Frame

Super slim aluminium frame with powder coated treatment get 26mm only!



Tempered Glass Protection

High light transmittance tempered glass in front of the screen as protection, safety your digital signage player in anywhere.



VESA & Free Wall Mount Bracket

You can use your own VESA bracket, if our free wall mount bracket can't meet your demand.



Commercial Grade

Designed for use in commercial applications this screen can run 24/7. All connectors have been locked to avoid tampering.



Multi Options

You can choose the best one for your client.

Specifications

Model		No.521T					
Panel	Display Size(inch)	21.5"	32"	43"	49"	55"	65"
	Type	60Hz E-LED BLU					
	Resolution	1920x1080 (16:9)					
	Active Display Area(mm)	476.8(H) x268.3(V)	700.5(H) x394.8(V)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	1428.4(H) x803.5(V)
	Aspect Ratio	16:09					
	Brightness(cd/m2)	250nit	300nit	300nit	350nit	350nit	350nit
	Contrast Ratio(Typ.)	1000:1	1000:1	1000:1	1000:1	5000:1	5000:1
	Viewing Angle(H/V)	178:178					
	Color	16.7M					
	Response Time(G-to-G)	6ms					
	Display Colors	10bit Dithering - 1.07Billion					
	Operation Hour	24/7					
Sound	Audio Output	5W, 8Ω (2 sets)					
Power	Type	Internal					
	Power Supply	AC 100~ 240V (50Hz~60Hz)					
	Sleep mode	less than 0.5W					
	Off mode	less than 0.5W					
Mechanical Spec	Protection Glass	Yes					
	Stand Type	Wall mount					
Environmental	Operating Temperature	0°C ~ 45°C					
	Storage Temperature	-30°C ~ 55°C					
	Operating Humidity	10% ~ 80 %					
	Storage Humidity	5% ~ 95%					
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)				
		RAM	2G				
		Memory	Built-in FLASH memory 8G				
		USB	USB2.0 HOST(X3)				
		LAN	10M/100M Ethernet(Network version screen only)				
		External memory	8GB SD card(up to 32G)				
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)				
		Media Resolution	3840*2160				
		Wi-Fi	802.11 b/g/n Ethernet (Network version screen only)				
Operating System	Android 7.1.2						
Certification	Safety	CE FCC ROHS					
Accessories	Include	Wall mount bracket, Scheduling software, Remote control, Key, Power cable, SD card					
	Optional	Floor stand, Ceiling Mount					
	Quality assurance	1 Year (2-3 years optional)					
	Type of packaging	Carton box /honeycomb box + wooden case					

Product Advantages

Achieve compelling customer engagement through touchscreen displays

State of the art projected capacitive interactive technology offers the most responsive and sensitive touch experience available. Designed for commercial applications.



Product Features



Interactive

10 touch points for the sensitive Pro-Cap touch screen.



Tempered Glass Protection

High light transmittance tempered glass in front of the screen as protection, Waterproof and dustproof, safety your digital signage player in anywhere.



wheel Available

Wheel Available for easy move around, once the kiosk in the position the wheels can be retracted.



Reserved Connectivity

There are few reserved connectors on the base, you can choose the best one as you want.



Security Lock

All connectors have been locked, can't be open except the unique key.



Plug-in For Interactive application

Way finding, lucky draw, spilling & win etc plug-in apps for different applications.

Specifications

Model		No.523S		
Panel	Display Size(inch)	43"	49"	55"
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio	16:09	16:09	16:09
	Brightness(cd/m2)	300nit	350nit	350nit
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1
	Viewing Angle(H/V)	178:178	178:178	178:178
	Color	16.7M	16.7M	16.7M
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)	6ms	6ms	6ms
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour	24/7	24/7	24/7
	Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type	Internal	Internal	Internal
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	BTU(Max)	525.14	562.65	637.67
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W
Mechanical specification	Protection Glass	Yes	Yes	Yes
	Stand Type	Foot Stand	Foot Stand	Foot Stand
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity	10~80%	10~80%	10~80%
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® 3368 (1.8GHz, octa core)	
		RAM	2G	
		Flash	8G EMMC	
		USB	USB2.0 HOST(X3)	
		LAN	10M/100M Ethernet(Network version screen only)	
		External memory	8GB SD card(up to 32G)	
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)	
		Media Resolution	3840*2160	
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)	
		Operating System	Android 7.1.2	
Certification	Safety	CE FCC ROHS		
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance	1 Year (2-3 years optional)		
	Type of packaging	Carton box /honeycomb box + wooden case		

Product Advantages

Achieve compelling customer engagement through touchscreen displays

State of the art projected capacitive interactive technology offers the most responsive and sensitive touch experience available. Designed for commercial applications.



Product Features



Interactive

10 touch points for the sensitive Pro-Cap touch screen.



Tempered Glass Protection

High light transmittance tempered glass in front of the screen as protection, Waterproof and dustproof, safety your digital signage player in anywhere.



wheel Available

Wheel Available for easy move around, once the kiosk in the position the wheels can be retracted.



Reserved Connectivity

There are few reserved connectors on the base, you can choose the best one as you want.



Security Lock

All connectors have been locked, can't be open except the unique key.



Plug-in For Interactive application

Way finding, lucky draw, spinning & win etc plug-in apps for different applications.

Specifications

Model		No.523K			
Panel	Display Size(inch)	43"	49"	55"	
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Aspect Ratio	16:09	16:09	16:09	
	Brightness(cd/m2)	300nit	350nit	350nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)	
	Response Time(G-to-G)	6ms	6ms	6ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	BTU(Max)	525.14	562.65	637.67	
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
Mechanical specification	Protection Glass	Yes	Yes	Yes	
	Stand Type	Foot Stand	Foot Stand	Foot Stand	
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C	
	Operating Humidity	10~80%	10~80%	10~80%	
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	
OS	Android Media Player	Processor	Rockchip ® 3368 (1.8GHz, octa core)		
		RAM	2G		
		Flash	8G EMMC		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
Operating System	Android 7.1.2				
Certification	Safety	CE FCC ROHS			
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 Year (2-3 years optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			



No.522D

Double Sided Kiosk

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required, and you can run the third party Digital Signage software via the Android PC board too.

Double Sided Screen

Display made with double sided screens, more important the one side of the screen brightness could reach to 350 units, more attractive for potential customer.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Integrated Castors

Designed with brake block castors for easy manoeuvrability, once the kiosk is in the position the wheels can be locked.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7 Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer



Dual Display



Wheel

Product Advantages

Indoor double screen dual sided newspaper kiosk



Product Features



Tempered Glass Protection

High light transmittance tempered glass in front of the screen as protection, safety your digital signage player in anywhere.



Play & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.



Touch Screen Upgrade

The screen can be upgraded to become a ten touch points Pro-Cap touch screen, create buttons and multiple playlists to make the screen get interactive.



Dual Screen LCD Display

Double-sided display can increase the display space more fully, so that customers can view from different angles, presenting the perfect visual advertising effect.



Integrated Wheels

Designed with wheels for easy move around, once the kiosk in the position the wheels can be retracted.



Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.

Specifications

Model		No.522D		
Panel	Display Size(inch)	43"	49"	55"
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio	16:09	16:09	16:09
	Brightness(cd/m2)	300nit	350nit	350nit
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1
	Viewing Angle(H/V)	178:178	178:178	178:178
	Color	16.7M	16.7M	16.7M
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)	6.5ms	6.5ms	6.5ms
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour	24/7	24/7	24/7
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type	Internal	Internal	Internal
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W
Mechanical Spec	Protection Glass	Yes	Yes	Yes
	Stand Type	Foot Stand	Foot Stand	Foot Stand
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity	10~80%	10~80%	10~80%
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® 3368 (1.8GHz, octa core)	
		RAM	2G	
		Flash	8G EMMC	
		USB	USB2.0 HOST(X3)	
		LAN	10M/100M Ethernet(Network version screen only)	
		External memory	8GB SD card(up to 32G)	
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)	
		Media Resolution	3840*2160	
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)	
Operating System	Android 7.1.2			
Certification	Safety	CE FCC ROHS		
	Optional	Touch screen upgrade, Floor stand, Ceiling Mount		
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance	1 years (2-3 years optional)		
	Type of packaging	Carton box /honeycomb box + wooden case		

Specifications

Model		No.522T			
Panel	Display Size(inch)		43"	49"	55"
	Type		60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution		1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)		941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio		16:09	16:09	16:09
	Brightness(cd/m2)		350nit	350nit	350nit
	Contrast Ratio(Typ.)		1000:1	1000:1	5000:1
	Viewing Angle(H/V)		178:178	178:178	178:178
	Color		16.7M	16.7M	16.7M
	Pixel Pitch(mm)		0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)		6ms	6ms	6ms
	Display Colors		10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour		24/7	24/7	24/7
	Sound	Loud Speaker		5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type		Internal	Internal	Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Mechanical specification	BTU(Max)	525.14	562.65	637.67
		Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
Off mode		less than 0.5W	less than 0.5W	less than 0.5W	
	Protection Glass		N/A	N/A	N/A
	Stand Type		Foot Stand	Foot Stand	Foot Stand
	Bezel Width (Top/Side/Bot) (mm)		6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9
Environmental	Operating Temperature		0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature		-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity		10~80%	10~80%	10~80%
	Storage Humidity		5% ~ 95%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® 3368 (1.8GHz, octa core)		
		RAM	2G		
		Flash	8G EMMC		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
Operating System	Android 7.0				
Certification	Safety		CE FCC ROHS		
Accessories	Included		Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance		1 Year (2-3 years optional)		
	Type of packaging		Carton box /honeycomb box + wooden case		



No.522

Freestanding Advertising Kiosks

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required, and you can run the third party Digital Signage software via the Android PC board too.

Giant Tablet Styling

Designed as one giant tablet. The sleek and tiny look is achieved with a striking aluminium surround and stunning IPX1 rated edge-to-edge glass.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Integrated Castors

Designed with brake block castors for easy manoeuvrability, once the kiosk is in the position the wheels can be locked.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7 Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer



Wheel

Product Advantages

Freestanding Advertising Kiosk



Product Features



Tempered Glass Protection

High light transmittance tempered glass in front of the screen as protection, safety your digital signage player in anywhere.



Touch Screen Upgrade

The screen can be upgraded to become a ten touch points Pro-Cap touch screen, create buttons and multiple playlists to make the screen get interactive.



Commercial Grade

Designed for use in commercial applications this screen can run 24/7. All connectors have been locked to avoid tampering.



Intergrated Wheels

Designed with wheels for easy move around, once the kiosk in the position the wheels can be retracted.



Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.



Play & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.

Specifications

Model		No.522			
Panel	Display Size(inch)	43"	49"	55"	
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Aspect Ratio	16:09	16:09	16:09	
	Brightness(cd/m2)	350nit	350nit	350nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)	
	Response Time(G-to-G)	6ms	6ms	6ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
	Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	BTU(Max)	525.14	562.65	637.67	
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Protection Glass	N/A	N/A	N/A	
	Stand Type	Foot Stand	Foot Stand	Foot Stand	
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C	
	Operating Humidity	10~80%	10~80%	10~80%	
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)		
		RAM	2G		
		Flash	8G EMMC		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
Operating System	Android 7.1.2				
Certifi cation	Safety	CE FCC ROHS			
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 Year (2-3 years optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			



No.540F

Super Thin Free Standing Kiosk

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required ,and you can run the third party Digital Signage software via the Android PC board too.

High Brightness Double Sided Screen

Display made with double sided screens,more important the one side of the screen brightness could reach to 1,000 units,more attractive for potential customer. More impressive thing is forsuch a high brightness and double sided screen,the thickness reach to 45mm only!

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Elegant Design

Super slim design get 45mm only,slim but stabler.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer

Product Advantages

Super Slim Double Sided High Brightness Kiosk



Product Features




Slim Body

Super slim thickness double sided display kiosk get 45mm only, the thinnest kiosk for double sided that you ever seen!




Multiple Power Solutions

Humanization design for multiple power cable solutions, no need to break the nice floor to power it.

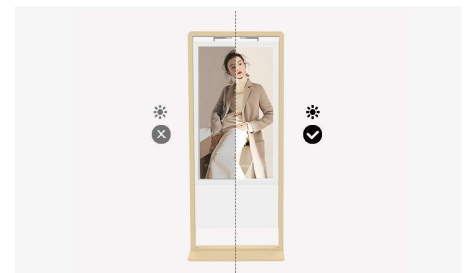

High Brightness

Developed as professional advertising kiosk for street shop and shopping mall, one side of the screen get 1,000nits high as 3 times of normal display.

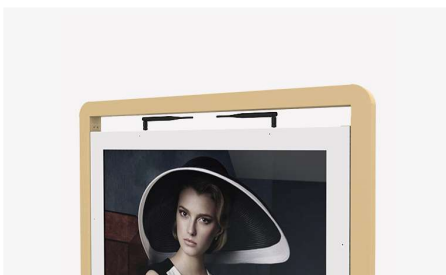

Wi-Fi Strength

Strong wifi antenna ensure the screen can get stable wifi signal no matter 2.4G or 5G.



Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.



Play & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.

Specifications

Model		No.540F		
Panel	Display Size(inch)	43"	49"	55"
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio	16:09	16:09	16:09
	Brightness(cd/m2)	350&1000nit	350&1000nit	350&1000nit
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1
	Viewing Angle(H/V)	178:178	178:178	178:178
	Color	16.7M	16.7M	16.7M
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)	6ms	6ms	6ms
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour	24/7	24/7	24/7
	Haze	44%	25%	25%
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)
Power	Type	Internal	Internal	Internal
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	BTU(Max)	525.14	562.65	637.67
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W
Mechanical Spec	Protection Glass	N/A	N/A	N/A
	Stand Type	Foot Stand	Foot Stand	Foot Stand
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity	10~80%	10~80%	10~80%
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)	
		RAM	2G	
		Flash	8G EMMC	
		USB	USB2.0 HOST(X3)	
		LAN	10M/100M Ethernet(Network version screen only)	
		External memory	8GB SD card(up to 32G)	
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)	
		Media Resolution	3840*2160	
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)	
		Operating System	Android 7.0	
Certification	Safety	CE FCC ROHS		
Accessories	Included	Floor stand,Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance	1 Year (2-3 years optional)		
	Type of packaging	Carton box /honeycomb box + wooden case		



No.543

Rotatable Interactive Kiosk

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required ,and you can run the third party Digital Signage software via the Android PC board too.

Support screen rotation

Support screen rotation, landscape and vertical display touch screen interactive kiosk with gravity sensor, meet your different advertisement requirement.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Intergrated Wheels

Designed with wheels for easy move around,once the kiosk in the position the wheels can be retracted.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Integrated Dual OS



24/7 Usage



Integrates Wi-Fi



IPS panel Technology



LED Backlight



Touch Screen Upgrade



Landscape or Portrait Orientation




Wheel

Product Advantages

High Brightness Smart Ad Display Rotating Kiosk



Product Features

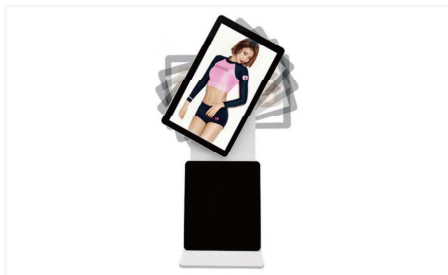

Screen rotation

Support screen rotation, landscape and vertical display touch screen interactive kiosk with gravity sensor.



Safety display

Higher Security Toughened Glass



Touch Screen Upgrade

The screen can be upgraded to become a ten touch points Pro-Cap touch screen, create buttons and multiple playlists to make the screen get interactive.



Intergrated Wheels

Designed with wheels for easy move around, z once the kiosk in the position the wheels can be retracted.



Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.



Play & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.

Specifications

Model		No.543			
Panel	Display Size(inch)	43"	49"	55"	
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Aspect Ratio	16:09	16:09	16:09	
	Brightness(cd/m2)	350nit	350nit	350nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)	
	Response Time(G-to-G)	6.5ms	6.5ms	6.5ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
Sound	Audio Output	5W, 8Ω (2 sets),Dual-channel stereo audio output			
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz			
Mechanical Spec	Protection Glass	Yes	Yes	Yes	
	Stand Type	Foot Stand	Foot Stand	Foot Stand	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Operating Humidity	-30°C~55°C	10~80%	10~80%	
	Storage Humidity	10~80%	5% ~ 95%	5% ~ 95%	
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)		
		RAM	2G		
		Memory	Built-in FLASH memory 8G		
		USB	USB2.0 HOST(X2)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
		Connection	Ethernet port (RJ45), WiFi, Bluetooth (optional), 3G&4G (optional)		
		I/O	DC 12V*1, RJ45*1, USB-OTG*1, USB*2, HDMI*1(output), SD socket*1, Audio*1(output)		
	Operating System	Android 7.1.2			
	Window10	Processor	Intel® i3 fourth generation processor (3.2GHz, dual core)		
		RAM	8G DDR3		
		Storage	120G SSD		
		Connection	Ethernet port (RJ45), WiFi, Bluetooth (optional)		
		I/O	DC 12V*1, RJ45*1, VGA*1(output), USB*4, HDMI*1(output), Audio*1(output), Microphone(input)		
	Certifi cation	Safety	CE FCC ROHS		
Accessories	Include	Floor stand,Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 year (2-3 years optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			



No.552

43INCH PORTABLE DIGITAL SIGNAGE POSTER

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required ,and you can run the third party Digital Signage software via the Android PC board too.

Giant Tablet Styling

Designed as one giant tablet. The sleek and sexy look is achieved with a striking aluminium surround and stunning IPX1 rated edge-to-edge glass.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Portable Design

The bracket could be fold to make the full side of kiosk small, and easy to allow

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7 Usage



Free Scheduling
Software



Android Media
Player



IPS panel
Technology



LED Backlight



Eco Power Timer

Specifications

Model		No.552			
Panel	Display Size(inch)		43"	49"	55"
	Type		60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution		1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)		941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio		16:09	16:09	16:09
	Brightness(cd/m2)		350nit	350nit	350nit
	Contrast Ratio(Typ.)		1000:1	1000:1	5000:1
	Viewing Angle(H/V)		178:178	178:178	178:178
	Color		16.7M	16.7M	16.7M
	Pixel Pitch(mm)		0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)		6ms	6ms	6ms
	Display Colors		10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour		24/7	24/7	24/7
	Haze		44%	25%	25%
Sound	Audio Output		5W, 8Ω (2 sets),Dual-channel stereo audio output		
Power	Type		Internal	Internal	Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Power Consumption	Max[W/h]	154	156	187
		Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
Mechanical Spec	Protection Glass		Yes	Yes	Yes
	Stand Type		Foot Stand	Foot Stand	Foot Stand
Environmental	Operating Temperature		0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature		-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity		10~80%	10~80%	10~80%
	Storage Humidity		10~80%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)		
		RAM	2G		
		Memory	Built-in FLASH memory 8G		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
		Operating System	Android 7.1.2		
Certification	Safety		CE FCC ROHS		
Accessories	Include		Floor stand,Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance		1 Year (2-3 years optional)		
	Type of packaging		Carton box /honeycomb box + wooden case		



No.552

43INCH PORTABLE DIGITAL SIGNAGE POSTER

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required, and you can run the third party Digital Signage software via the Android PC board too.

Giant Tablet Styling

Designed as one giant tablet. The sleek and sexy look is achieved with a striking aluminium surround and stunning IPX1 rated edge-to-edge glass.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Portable Design

The bracket could be fold to make the full side of kiosk small, and easy to allow

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7 Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer


Product Advantages

Driving customer engagement and purchases

Standalone signage entice visitors to watch, learn and interact anywhere – whether in a mall, airport or other venue. Compelling content can drive customers to a specific store or restaurant, or encourage visitor to scan a QR code and buy online.



Product Features

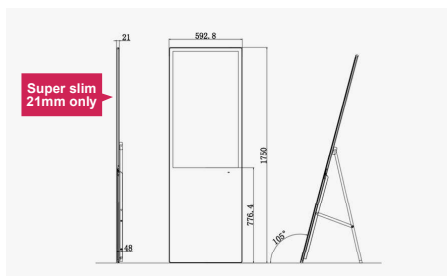

Slim Body

Super slim thickness display get 21mm only



Intelligent Display

Supports splitting the screen into multiple windows with different content being reproduced in each of them.




Safety display

Higher Security Toughened Glass



The Easiest Digital Singnage

USB Directly Playing
Pop Android Sytem
The Lightest Portable AD Player

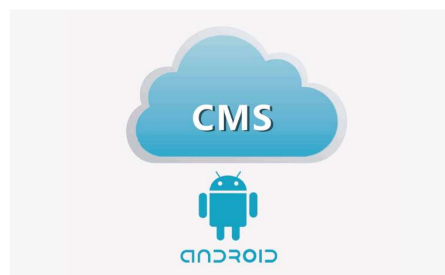

Cloud Bases CMS Upgrade

Player could be upgrade to network CMS if standalone version can't meet your control demand, via network CMS you can manage the player any time in any place with Internet.



Play & Play

Play and play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content copy over and then remove.

Specifications

Model		No.552			
Panel	Display Size(inch)		43"	49"	55"
	Type		60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution		1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)		941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)
	Aspect Ratio		16:09	16:09	16:09
	Brightness(cd/m2)		350nit	350nit	350nit
	Contrast Ratio(Typ.)		1000:1	1000:1	5000:1
	Viewing Angle(H/V)		178:178	178:178	178:178
	Color		16.7M	16.7M	16.7M
	Pixel Pitch(mm)		0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)
	Response Time(G-to-G)		6ms	6ms	6ms
	Display Colors		10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Operation Hour		24/7	24/7	24/7
	Haze		44%	25%	25%
Sound	Audio Output		5W, 8Ω (2 sets),Dual-channel stereo audio output		
Power	Type		Internal	Internal	Internal
	Power Supply		AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz
	Power Consumption	Max[W/h]	154	156	187
		Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W
Off mode		less than 0.5W	less than 0.5W	less than 0.5W	
Mechanical Spec	Protection Glass		Yes	Yes	Yes
	Stand Type		Foot Stand	Foot Stand	Foot Stand
Environmental	Operating Temperature		0°C~45°C	0°C~45°C	0°C~45°C
	Storage Temperature		-30°C~55°C	-30°C~55°C	-30°C~55°C
	Operating Humidity		10~80%	10~80%	10~80%
	Storage Humidity		10~80%	5% ~ 95%	5% ~ 95%
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)		
		RAM	2G		
		Memory	Built-in FLASH memory 8G		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
		Operating System	Android 7.1.2		
Certification	Safety		CE FCC ROHS		
Accessories	Include		Floor stand,Scheduling software, Remote control, Key, Power cable, SD card		
	Quality assurance		1 Year (2-3 years optional)		
	Type of packaging		Carton box /honeycomb box + wooden case		



LCD Video Wall Displays

Super Narrow Bezel

Achieve a sensational virtually seamless video wall thanks to our video wall panels that have a total bezel size of just 3.5mm. This allows your content to take center stage and provides a visual experience to remember for anyone who sees the display.

Automatic Tiling

Our Video Wall Displays offer the ultimate in versatility. With a hassle-free setup, it is easy for our Video Wall Displays to tile the video signal automatically thanks to their integrated video matrix processor. This means that no additional matrix processing hardware is required, regardless of the configuration of your video wall.

IPS Panel

State-of-the-art commercial-grade IPS panels give our video walls superior color uniformity, a large viewing angle, and remarkably vibrant colors, even when mounted in portrait. Also, these panels do not suffer from blackening defects when used as a window display.

Multiple Configurations

These displays can be used to create video walls of any configuration, for example 2x2, 3x3, 1x4, 5x3, etc. Whatever your configuration requirements, these displays can support them, even if you want a portrait video wall.

Commercial Grade

Designed for use in commercial applications, Video Walls can run 24/7.

Environmentally Friendly Power Timer

Allows for a reduced power use age in those hours that the displays are not required. Set daily or weekly On/Off times for your displays.

Portrait/Landscape Orientation Connectivity

We have options for landscape only and both Portrait & landscape, can cover all your demand.

You can run the video wall display from your PC or media players as they have a powerful interface that supports a wide range of audio and video inputs, such as HDMI, VGA, DVI, RGB/HV, Composite Video, and YPbPr.



Super Narrow Bezel



Multiple configurations



24/7 Usage



Automatic Tiling Function



178° Super Wide Viewing Angle



IPS panel Technology



LED Backlight Integrated Temperature Control



HDMI AV Inputs



Landscape or Portrait Orientation


Product Advantages

Compelling Video Wall Displays

Whether these walls are conveying important information like transportation times or allowing retailers to showcase new products in an amazing way, video walls are a powerful solution for cutting-edge information delivery.




Product Features

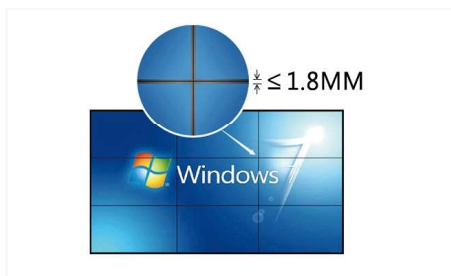


1.8mm Bezel Width

The seam is only 1.8mm wide, bring you deeper visual impact!

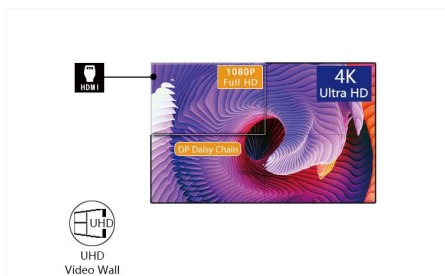

UHD Display

Every signal screen could be 1080P!

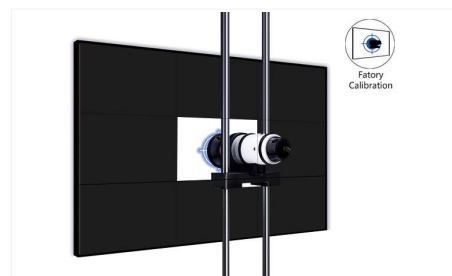

Factory Calibration

Every video wall panel will be do the calibration in factory before we delivery to the client.




Anti-Glare Panel

Would have perfect image even under lighting!



Maintenance Service Easier

With Push-Out bracket, it would be easy to do the maintenance service.

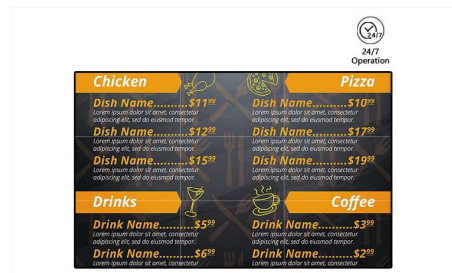

Specified For Commercial

High contrast ratio and brightness not just support vivid and reliable contacts, but also support 24/7 operation.

Specifications

Model		LCD video wall	
Panel	Display Size(inch)	46"	55"
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)	1015(H) x569(V)	1209.6(H) x 680.4(V)
	Aspect Ratio	16:09	16:09
	Brightness(cd/m2)	500nit	500nit
	Contrast Ratio(Typ.)	4000:1	4000:1
	Viewing Angle(H/V)	178:178	178:178
	Color	16.7M	16.7M
	Bezel	1.8mm	1.8mm
	Response Time(G-to-G)	6.5ms	6.5ms
	Life time	60,000hours	60,000hours
	Operation Hour	24/7	24/7
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion
	Pixel Pitch(mm)	0.530(H) x 0.530(V)	0.630(H) x 0.630(V)
	Haze	25% (Outer Haze 23%)	25% (Outer Haze 23%)
	Response time	8(Typ. G to G)	8(Typ. G to G)
	Mechanical Spec	Protection Glass	N/A
Stand Type		N/A	N/A
I/O	Input	HDMI*1, VGA*1, DVI*1, AV*1, RS232-C*1, USB*1, IR*1	
Others	TV System	PAL / NTSCV	
	Source selection	RGB, DVI, HDMI, AV, USB	
	Power	Build-in type, 100 ~ 240V AC, 50/60 Hz	
	Color	Black	
	Surface treatment	Powder coated	
	Shell material	Cold-rolled sheet	
	Screen position	Landscape (vertical is optional)	
	Installation	Hooks	
	Package	PE film, foam corner and honeycomb box	
	Application	Indoor	
Accessories	HDMI cable*1, RJ45 cable*1, remote control*1, IR sensor*1, driver USB disk*1		
Environmental	Operating Temperature	0°C~40°C	0°C~40°C
	Humidity	10~80%	10~80%
Certification	Safety	CE FCC ROHS	
Accessories	Installation Type	Curve type, Wall mount type, Cabinet type, Floor stand type, Prop-up type, Other customized	
	Quality assurance	2-3 years (optional)	
	Type of packaging	Honeycomb box + wooden case	



No.540

Android Double Sided Hanging Display

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required ,and you can run the third party Digital Signage software via the Android PC board too.

High Brightness Double Sided Screen

Display made with double sided screens,more important the one side of the screen brightness could reach to 1,000 units,more attractive for potential customer. More impressive thing is forsuch a high brightness and double sided screen,the thickness reach to 45mm only!

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Adjustable Wire Rope

Default 3M length wire rope with lock catch, easy to adjust the length. Could meet different installation place.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer




Dual Display

Why go digital?

Unlike conventional posters, digital window displays clear, bright images that draw more customers into your store. They're also more efficient and easy update and maintain.

4 Benefits of digital window display

Digital window displays provide retailers with immediate value that directly impacts the bottom line.

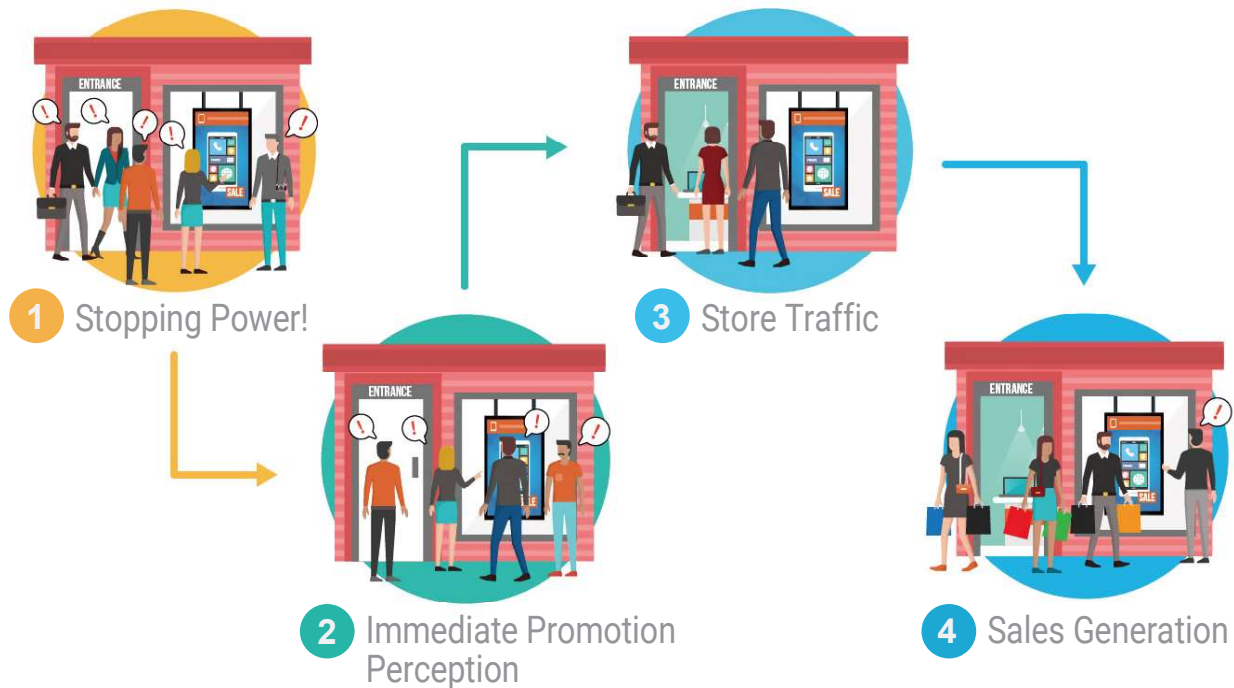

Android Double Sided Hanging Display Series



No.540



No.540S



No.540T

Increase Foot Traffic with a Digital Window

Specifications

Model		No.540			
Panel	Display Size(inch)	43"	49"	55"	
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Aspect Ratio	16:09	16:09	16:09	
	Brightness(cd/m2)	350&1000nit	350&1000nit	350&1000nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)	
	Response Time(G-to-G)	6ms	6ms	6ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
	Haze	44%	25%	25%	
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	BTU(Max)	525.14	562.65	637.67	
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Protection Glass	N/A	N/A	N/A	
	Stand Type	Ceiling hanging mount	Ceiling hanging mount	Ceiling hanging mount	
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C	
	Operating Humidity	10~80%	10~80%	10~80%	
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	
OS	Android Media Player	Processor	Rockchip ® RK3368 (1.8GHz, octa core)		
		RAM	2G		
		Flash	8G EMMC		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
Operating System	Android 7.1.2				
Certifi cation	Safety	CE FCC ROHS			
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 Year 2-3 years (optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			



HIGH BRIGHTNESS

Indoor Hanging Display

Window Displays (3,000cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (3,000cd/m²); more than 5 times brighter than a standard home TV to allow easy readability in window displays.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.

Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 60,000 hours and have no external buttons or controls to avoid tampering.

Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.

Network CMS Upgrade

We also offer cloud basis network CMS if required, and you can run the third party Digital Signage software via the Android PC board too.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.



3,000CD/M²
SUNLIGHT READABLE



24/7 Usage
COMMERCIAL GRADE



INTEGRATED ANDROID
MEDIA PLAYER



PLUG AND PLAY



4K DISPLAY



LED BACK LIGHT



IPS PANEL
TECHNOLOGY




INTEGRATED SPEAKERS



NO NOISE

High Brightness 4K Display

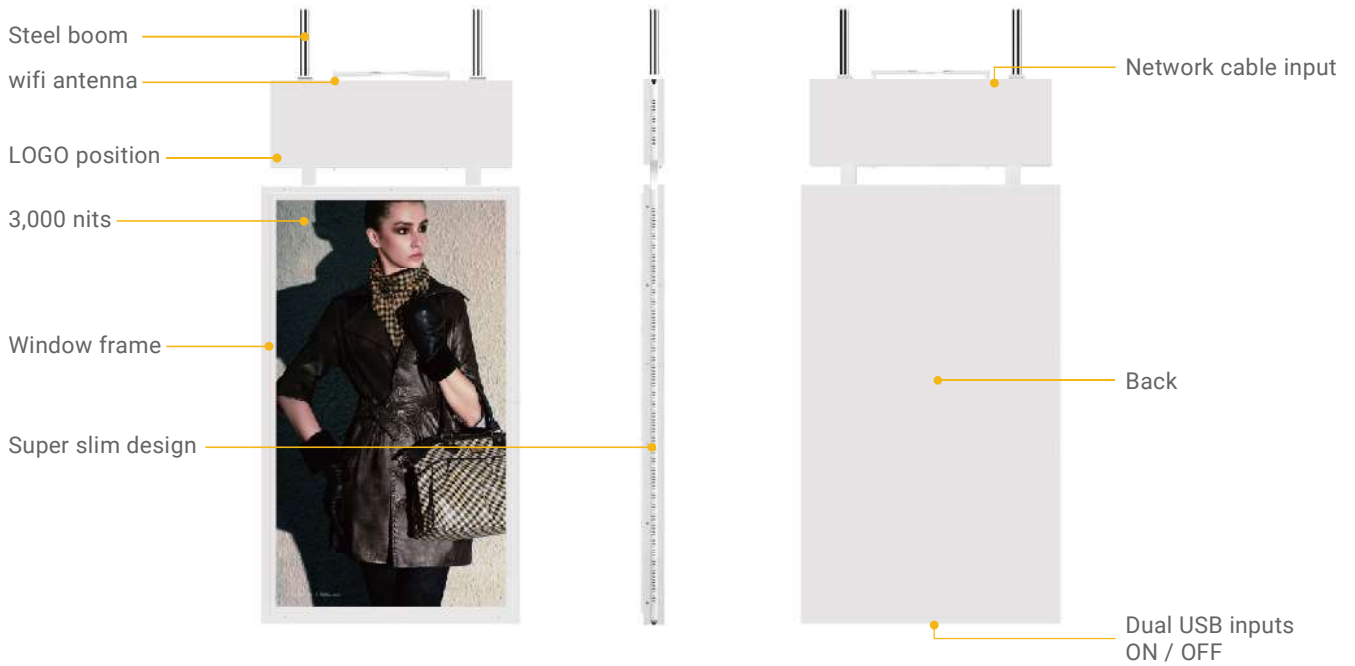

Benefits of digital window display

Digital window displays provide retailers with immediate value that directly impacts the bottom line.



1 Shopping Power



2 Immediate Promotion Perception



3 Store Traffic



4 Sales Generation

Not afraid of sun reflection

Specialize for the street shop! 4K resolution makes perfect display performance with 3,000nits high brightness, it's the most powerful weapon for your retail store.



Increase Foot Traffic with a Digital Window

Specifications

Model		No.540H			
Panel	Display Size(inch)	43"	49"	55"	
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Aspect Ratio	16:09	16:09	16:09	
	Brightness(cd/m2)	3000nit	3000nit	3000nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	1000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)	
	Response Time(G-to-G)	6ms	6ms	6ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
	Haze	44%	25%	25%	
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	BTU(Max)	525.14	562.65	637.67	
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Protection Glass	N/A	N/A	N/A	
	Stand Type	Hanging	Hanging	Hanging	
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C	
	Operating Humidity	10~80%	10~80%	10~80%	
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	
OS	Android Media Player	Processor	RK3288, Quad core		
		RAM	2G		
		Flash	8G EMMC		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
Operating System	Android 7.0				
Certifi cation	Safety	CE FCC ROHS			
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 Year 2-3 years (optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			

No.540H2



HIGH BRIGHTNESS

Indoor Double-Sided Hanging Display

Window Displays (3,000 & 700cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (3,000 & 700cd/m²); more than 5 times brighter than a standard home TV to allow easy readability in window displays.

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.

Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 60,000 hours and have no external buttons or controls to avoid tampering.

Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.

Network CMS Upgrade

We also offer cloud basis network CMS if required, and you can run the third party Digital Signage software via the Android PC board too.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.



3,000CD/M²
SUNLIGHT READABLE



24/7 Usage
COMMERCIAL GRADE



INTEGRATED ANDROID
MEDIA PLAYER



PLUG AND PLAY



4K DISPLAY



LED BACK LIGHT



IPS PANEL
TECHNOLOGY



DUAL DISPLAY



NO NOISE

High Brightness 4K Display



Benefits of digital window display

Digital window displays provide retailers with immediate value that directly impacts the bottom line.



1 Shopping Power



2 Immediate Promotion Perception



3 Store Traffic



4 Sales Generation

Specialize for the street shop!

Not afraid of sun reflection. 4K resolution makes perfect display performance with 3,000 nits for outside view, 700 nits for inside view, it's the most powerful weapon for your retail store.



Increase Foot Traffic with a Digital Window

Specifications

Model		No.540H2			
Panel	Display Size(inch)	43"	49"	55"	
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	
	Active Display Area(mm)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Aspect Ratio	16:09	16:09	16:09	
	Brightness(cd/m2)	3000/700 nit	3000/700 nit	3000/700 nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	1000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.490(H) x 0.490(V)	0.560(H) x 0.560(V)	0.630(H) x 0.630(V)	
	Response Time(G-to-G)	6ms	6ms	6ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
	Haze	44%	25%	25%	
Sound	Loud Speaker	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	5W, 8Ω (2 sets)	
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	BTU(Max)	525.14	562.65	637.67	
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Protection Glass	N/A	N/A	N/A	
	Stand Type	Hanging	Hanging	Hanging	
	Bezel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9	6.9/6.9/8.9	6.9/6.9/8.9	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	-30°C~55°C	-30°C~55°C	-30°C~55°C	
	Operating Humidity	10~80%	10~80%	10~80%	
	Storage Humidity	5% ~ 95%	5% ~ 95%	5% ~ 95%	
OS	Android Media Player	Processor	RK3288, Quad core		
		RAM	2G		
		Flash	8G EMMC		
		USB	USB2.0 HOST(X3)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
Operating System	Android 7.0				
Certifi cation	Safety	CE FCC ROHS			
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 Year 2-3 years (optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			



Ultra Wide Stretched Bar LCD Display

Plug and Play

Plug and Play is the easiest and most simple way to upload content to the screen. Simply load images and videos onto a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Network CMS Upgrade

We also offer cloud basis network CMS if required ,and you can run the third party Digital Signage software via the Android PC board too.

Giant Tablet Styling

Designed as one giant tablet. The sleek and sexy look is achieved with a striking aluminium surround and stunning IPX1 rated edge-to-edge glass.

Commercial Grade

Designed for use in commercial applications this screen can run 24/7. There are no external buttons or controls to avoid tampering.

IPS Panel

Superior image quality and colour depth at 178° ultra wide viewing angle in both landscape and portrait orientations.

Portable Design

The bracket could be fold to make the full side of kiosk small, and easy to allow

LED Backlight

Improves brightness and contrast as well as improving their lifespan and reducing their power consumption. Unlike other forms of light this technology is mercury free; making it even more eco-friendly. The panel and backlight have a lifespan in excess of 60,000 hours.



Plug and Play



24/7 Usage



Free Scheduling Software



Android Media Player



IPS panel Technology



LED Backlight



Eco Power Timer

Specifications

Model		No.549			
Panel	Display Size(inch)	14.9"	28.8"	38"	
	Resolution	1280x390	1920x550	1920x540	
	Active Display Area(mm)	423(H) x175(V)	751.4(H) x 256(V)	968(H) x316(V)	
	Aspect Ratio	16:4.5	16:4.5	16:4.5	
	Brightness(cd/m2)	350nit	350nit	350nit	
	Contrast Ratio(Typ.)	1000:1	1000:1	1000:1	
	Viewing Angle(H/V)	178:178	178:178	178:178	
	Color	16.7M	16.7M	16.7M	
	Pixel Pitch(mm)	0.283(H) x 0.283(V)	0.330 (H) x 0.330(V)	0.330 (H) x 0.330(V)	
	Response Time(G-to-G)	6.5ms	6.5ms	6.5ms	
	Display Colors	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	10bit Dithering - 1.07Billion	
	Operation Hour	24/7	24/7	24/7	
Sound	Audio Output	5W, 8Ω (2 sets),Dual-channel stereo audio output			
Power	Type	Internal	Internal	Internal	
	Power Supply	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	AC 100 - 240 V~ (+/- 10 %), 50/60 Hz	
	Sleep mode	less than 0.5W	less than 0.5W	less than 0.5W	
	Off mode	less than 0.5W	less than 0.5W	less than 0.5W	
Mechanical Spec	Protection Glass	N/A	N/A	N/A	
	Stand Type	Wall mount	Wall mount	Wall mount	
Environmental	Operating Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Storage Temperature	0°C~45°C	0°C~45°C	0°C~45°C	
	Operating Humidity	-30°C~55°C	-30°C~55°C	-30°C~55°C	
	Storage Humidity	10~80%	10~80%	10~80%	
OS	Android Media Player	Processor	Rockchip®, RK33668 (1.5GHz, Octa core)		
		RAM	2G DDR3		
		Memory	Built-in FLASH memory 8G		
		USB	USB2.0 HOST(X2)		
		LAN	10M/100M Ethernet(Network version screen only)		
		External memory	8GB SD card(up to 32G)		
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)		
		Media Resolution	3840*2160		
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)		
		Operating System	Android 7.1		
Certifi cation	Safety	CE FCC ROHS			
Accessories	Include	Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 year (2-3 years optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			

HIGH BRIGHTNESS

Professional Monitors



Window Displays (1,500~3,000cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (1,500~3,000cd/m²); more than 5 times brighter than a standard home TV to allow easy readability in window displays.

Giant Tablet

These displays could be considered the largest commercial tablet on the market; but they are so much more. With a striking aluminium bezel and a sleek and sexy design, these displays always manage to catch the eye. Build with a strong tempered edge to edge glass front and a wide viewing angle, these commercial grade tablets are hard to miss and certainly stand out from the crowd.

Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos onto a USB stick, insert into the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.

24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 60,000 hours and have no external buttons or controls to avoid tampering.

Landscape or Portrait Orientation

these displays can be mounted in either landscape or portrait orientation and still retain a 178° viewing angle and remarkable image quality.

Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.

High Brightness 4K Display




ROUNDED CORNER DESIGN
BRUSHED METAL

4K DISPLAY
HIGHLIGHT
1,500~3000NITS DISPLAY



BACK

Panel control area

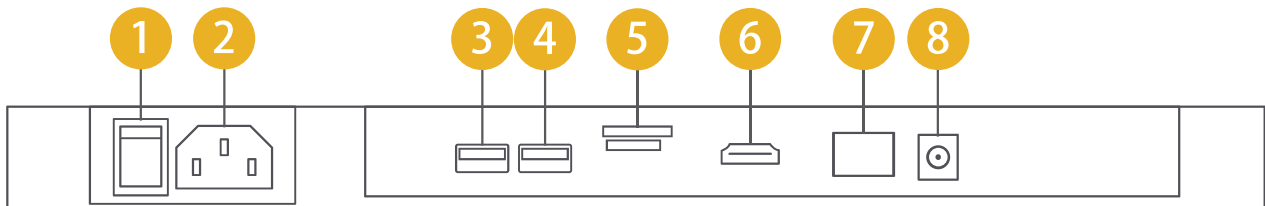

- | | | | |
|----------|-----------|---------------|--------------|
| 1 ON/OFF | 3 USB 2.0 | 5 SD/TIF CARD | 7 HDMI |
| 2 Power | 4 USB 3.0 | 6 HDMI | 8 Audio port |

Not afraid of sun reflection

Specialize for the street shop! 4K resolution makes perfect display performance with 1,500~3,000nits high brightness, it's the most powerful weapon for your retail store.



Specifications

Model		Highlight Display				
Panel	Display Size(inch)	32"	43"	49"	55"	
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	
	Resolution	1920*1080	3840*2160 (UHD)	3840*2160 (UHD)	3840*2160 (UHD)	
	Active Display Area(mm)	698.4 (H)*392.85(V)	941.2(H) x529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	
	Module Size(mm)	754*448.5*61.5	996.*586*67.5	1129.5*659.5*67.5	1263*734*67.5	
	Contrast Ratio(Typ.)	1400:1	1400:1	5000:1	5000:1	
	PPI (Pixel per inch)	69	69	69	40	
	Dot Pitch(mm)	0.121*0.364mm	0.163*0.490mm	0.186*0.559mm	0.105*0.315 mm	
	NTSC	68%	72%	99%	99%	
	Contrast Ratio	1400	1200	5000	1300	
	Surface Treatment	Hard coating				
	Aspect Ratio	16:09				
	Brightness(cd/m2)	1,500nit~3,000nit				
	Viewing Angle(H/V)	178:178				
	Display Colors	10bit Dithering - 1.07Billion				
	Color	16.7M				
	Response Time(G-to-G)	6ms				
	Operation Hour	24/7				
	Consumption (W)	Panel	95	130	175	180
		Backlight	85	110	155	165
Sound	Loud Speaker	5W, 8Ω (2 sets)				
Power	Type	Internal				
	Power Supply	AC 100 - 240 V~ (+/- 10 %),50/60 Hz				
	Sleep mode	less than 0.5W				
	Off mode	less than 0.5W				
Install way	Stand Type	Foot Stand/Wall mount/Hanging				
Environmental	Operating Temperature	0°C~50°C				
	Storage Temperature	-20°C~60°C				
	Operating Humidity	10~80%				
	Storage Humidity	5% ~ 95%				
OS	Android Media Player	Processor	Rockchip ® 3368 (1.8GHz, octa core)			
		RAM	2G			
		Flash	8G EMMC			
		USB	USB2.0 HOST(X3)			
		LAN	10M/100M Ethernet(Network version screen only)			
		External memory	8GB SD card(up to 32G)			
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)			
		Media Resolution	3840*2160			
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)			
		Operating System	Android 7.1.2			
Certifi cation	Safety	CE FCC ROHS				
Accessories	Included	Wall mount bracket, Scheduling software, Remote control, Key, Power cable, SD card				
	Quality assurance	1 Year (2-3 years optional)				
	Type of packaging	Carton box /honeycomb box + wooden case				

HIGH BRIGHTNESS

Professional Monitors



Window Displays (1,500~3,000cd/m²)

Brightness is paramount when using outward facing screens, these displays use commercial grade high brightness panels (1,500~3,000cd/m²); more than 5 times brighter than a standard home TV to allow easy readability in window displays.

Giant Tablet

These displays could be considered the largest commercial tablet on the market; but they are so much more. With a striking aluminium bezel and a sleek and sexy design, these displays always manage to catch the eye. Build with a strong tempered edge to edge glass front and a wide viewing angle, these commercial grade tablets are hard to miss and certainly stand out from the crowd.

24/7 Commercial Grade

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 60,000 hours and have no external buttons or controls to avoid tampering.

Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 60,000 hours and the power consumption is reduced by around 30%.

Landscape or Portrait Orientation

these displays can be mounted in either landscape or portrait orientation and still retain a 178° viewing angle and remarkable image quality.

RS-232 Control

Remotely control your screens by sending commands over long or short distances using RS-232 protocols.

Integrated Speakers

The displays feature two integrated slimline speakers for applications that require an audio element.

High Brightness 4K Display



1,500~3,000CD/M²
SUNLIGHT READABLE



24/7 Usage
COMMERCIAL GRADE



INTEGRATED SPEAKERS



LED BACK LIGHT



LANDSCAPE OR PORTRAIT
ORIENTATION



4K DISPLAY



NO NOISE




ROUNDED CORNER DESIGN
BRUSHED METAL

4K DISPLAY
HIGHLIGHT
1,500~3000NITS DISPLAY



BACK

Panel control area

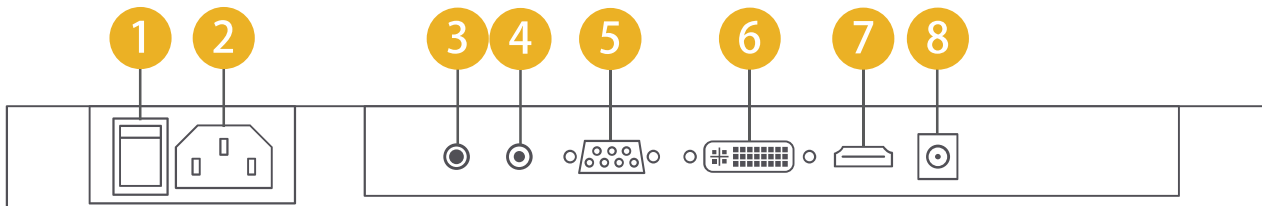

1 ON/OFF

3 Earphone Out

5 PC-RGB In

7 HDMI

2 Power

4 PC Audio In

6 DVI IN

8 DC Power Supply

Not afraid of sun reflection

Specialize for the street shop! 4K resolution makes perfect display performance with 1,500~3,000nits high brightness, it's the most powerful weapon for your retail store.



Specifications

Model		Highlight Display			
Panel	Display Size(inch)	32"	43"	49"	55"
	Type	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU	60Hz E-LED BLU
	Resolution	1920*1080	1920*1080	3840×2160 (UHD)	3840×2160 (UHD)
	Active Display Area(mm)	698.4 (H)*392.85(V)	941.18(H) x539.4(V)	1073.78(H) x 604(V)	1213(H) x 684(V)
	Module Size(mm)	754*448.5*61.5	996.*586*67.5	1129.5*659.5*67.5	1263*734*67.5
	Contrast Ratio(Typ)	1400:1	1200:1	5000:1	5000:1
	PPI (Pixel per inch)	69	69	69	40
	Panel Size(mm)	714(W)×411(H)	953(W)×539.2(H)	1073.78(W)×615.5(H)	1221.4(W)×694.8(H)
	Dot Pitch(mm)	0.121×0.364mm	0.163×0.490mm	0.186×0.559mm	0.105×0.315 mm
	NTSC	68%	72%	99%	99%
	Display Mode	Normally Black			
	Surface Treatment	Hard coating			
	Aspect Ratio	16:09			
	Brightness(cd/m2)	1,500nit~3,000nit			
	Viewing Angle(H/V)	178:178			
	Display Colors	10bit Dithering - 1.07Billion			
	Color	16.7M			
	Response Time(G-to-G)	6ms			
	Operation Hour	24/7			
	Consumption (W)	Panel	95	130	175
Backlight		85	110	155	165
Sound	Loud Speaker	5W, 8Ω (2 sets)			
Power	Type	Internal			
	Power Supply	AC 100 - 240 V~ (+/- 10 %),50/60 Hz			
	Sleep mode	less than 0.5W			
	Off mode	less than 0.5W			
Install way	Stand Type	Foot Stand/Wall mount/Hanging			
Environmental	Operating Temperature	0°C~50°C			
	Storage Temperature	-20°C~60°C			
	Operating Humidity	10~80%			
	Storage Humidity	5% ~ 95%			
Certifi cation	Safety	CE FCC ROHS			
Accessories	Included	Wall mount bracket, Scheduling software, Remote control, Key, Power cable, SD card			
	Quality assurance	1 Year (2-3 years optional)			
	Type of packaging	Carton box /honeycomb box + wooden case			



No.622

Outdoor Freestanding Advertising Kiosks

Sunlight Readable

Brightness is paramount when using outdoor screens these displays use commercial grade Ultra High Brightness panels (2,000 cd/m²), more than 5 times brighter than a standard home TV to allow easy readability in direct sunlight. The display also has an ambient light sensor that will alter the screens brightness based on the displays surrounding light levels. This leave sthe screen with the best clarity while also conserving energy.

Outdoor Enclosure

Designed with robust, corrosion protected, casing to protect against the elements and the public. With an IP65 rating, it keeps out all airborne particles as well as being protected from any wet weather conditions and also feature waterproof over molded AV connectors. The enclosures are made from mild steel and have thermally toughened glass.

Temperature Control

The internal air-conditioning system allows the screens to be in constant use in an outdoor environment. Internal fans keep the panel and other internal components at the optimum working temperature; ensuring a long and reliable life for your display.

Easy Updates

Update the screen via the simple plug and play USB method. You can control the screen from anywhere in the world by upgrading to a Network version.

Removable Base

If desired the base can be removed before installation for a more streamline appearance.

Network CMS Upgrade

We also offer cloud basis network CMS if required, and you can run the third party Digital Signage software via our Android PC board too.

Sturdy Enclosure

Made from mild steel, the enclosure is strong enough to protect the displays components from outside harm such as vandals.

Touch Screen Upgrade

An IP65 Rating means the display is able to withstand all weather conditions, wet and dry and also features waterproof over molded HDMI connectors.



Sunlight Readable



24/7 Usage



Touch Screen Upgrade



Android Media Player



Vandal Proof



Integrated Temperature Control



Steel Enclosure



Water Proof

Product Advantages

Outdoor advertising player digital signage Waterproof & Lightning protection LCD display screen kiosk




Product Features




Weather Proofing

Designed for outdoor purpose, all weather proofing!

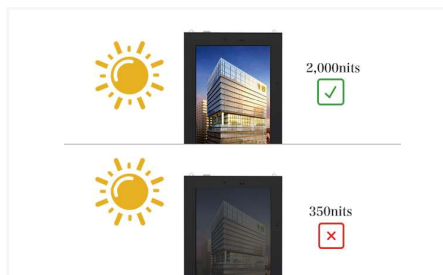


High Brightness Screen

Screen would get up to 2,000nits as 5 times more than normal display, makes the screen is readable even under the strong sunlight.

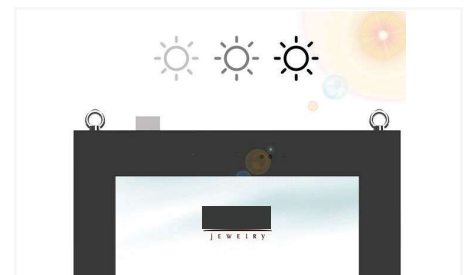


Anti-glare Tempered Glass

Strong anti-glare tempered glass will ensure passenger would not see the reflected light anytime from any angle.

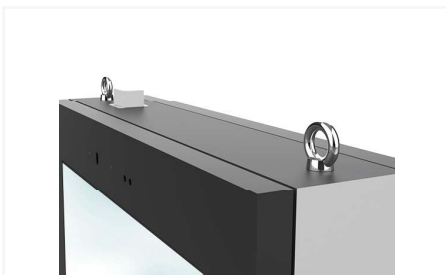

Lifting Bolt

In the consideration of safety and carry on issue, Screenage put two strong lifting bolt on the tope of the kiosk to avoide this issue.

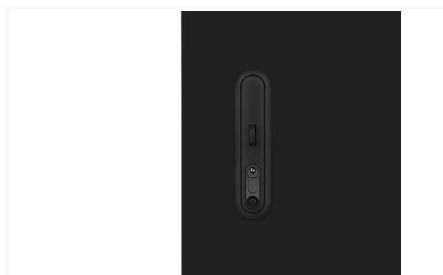

Security Lock

Double lockes with special & unique keys for the public safety, ensure people can't open that unless they have the right key.



10 Watt Loudspeaker

Two 8 ohm 10 watt outdoor use loudspeaker on the side, ensure passengers could hear what you want they hear.

Specifications

Model		No.622					
Panel	Display Size(inch)	43"	49"	55"	65"	75"	86"
	Resolution	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)	1920x1080 (16:9)
	Active Display Area(mm)	941.2(H) x 529.4(V)	1073.5(H) x 603.0(V)	1209.6(H) x 680.4(V)	1428.5(H) x 803.5(V)	1650.3(H) x 928.3(V)	1938.2(H) x 1098.3(V)
	Aspect Ratio	16:09	16:09	16:09	16:09	16:09	16:09
	Brightness(cd/m2)	2000nit	2000nit	2000nit	2000nit	2000nit	2000nit
	Contrast Ratio(Typ.)	1000:1	1000:1	5000:1	5000:1	5000:1	5000:1
	Viewing Angle(H/V)	178:178					
	Color	16.7M					
	Response Time(G-to-G)	6ms					
	Display Colors	10bit Dithering - 1.07Billion					
	Operation Hour	24/7					
Sound	Loud Speaker	5W, 8Ω (2 sets)					
Power	Type	Internal					
	Power Supply	AC 100 - 240 V~ (+/- 10 %),50/60 Hz					
	Sleep mode	less than 0.5W					
	Off mode	less than 0.5W					
Mechanical Spec	Protection Glass	Yes					
	Stand Type	Foot Stand					
	Panel Width (Top/Side/Bot) (mm)	6.9/6.9/8.9					
Environmental	Operating Temperature	-40°C ~ 50°C					
	Storage Temperature	-30°C ~ 55°C					
	Operating Humidity	10% ~ 80 %					
	Storage Humidity	5% ~ 95%					
	Cooling System	Powerful Turbofan & cross flow fan/Air condition (Optional)					
	Hypothermia protection	Heater (aluminium sheet warmer) (Optional)					
OS	Android Media Player	Processor	Rockchip ® 3368 (1.8GHz, octa core)				
		RAM	2G				
		Flash	8G EMMC				
		USB	USB2.0 HOST(X3)				
		LAN	10M/100M Ethernet(Network version screen only)				
		External memory	8GB SD card(up to 32G)				
		Multimedia	Video(MPG,AVI,MP4,RM,RMVB,TS),Audio(MP3,WMA),Image(JPG,GIF,BMP,PNG)				
		Media Resolution	3840*2160				
		Wi-Fi	802.11b/g/n Ethernet(Network version screen only)				
		Operating System	Android 7.1.2				
Certification	Safety	CE FCC ROHS IP65					
Accessories	Included	Scheduling software, Remote control, Key, Power cable, SD card					
	Quality assurance	1 year (2-3 years optional)					
	Type of packaging	Carton box /honeycomb box + wooden case					