CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION VERIFICATION AFFIDAVIT

This affidavit must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This affidavit is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

WIND LOSS MI	TIGA	TION INFORMATION	NC			
PREMISES #:		SUBJECT OF INSURA	ANCE:	Water Glades Condo		POLICY #:
BUILDING #:	3	STREET ADDRESS:	5510 N.	Ocean Blvd Bldg #3	Singer Island, FL 33404	
# STORIES:	27	BLDG DESCRIPTION	: 5510 N	I. Ocean Blvd Bldg #3	i e	
BUILDING TY	PE:	☐ II (4 to 6 stories)	X III (7	or more stories)		
Terrain Expos	sure C	category must be provi	ided for ea	ach insured location.		
		e building or unit at the s s (Check One): X Ex				GORY as defined under the
Certification be premises.	low for	purposes of TERRAII	N EXPOS	SURE CATEGORY ab	ove does not require	personal inspection of the
Built On or After I hereby certi	Jan.1, fy that	2002). the basic WIND SPE	ED of the	e building or unit at the	address indicated above	te for Terrain B only if Year
		der the Florida Building (
		nd Design is required the structure location (Co		<u> </u>		ceed the basic wind speed 2002).
		the building or unit at t of (Check One):				o the Florida Building Code
Certification for inspection of the	•		e basic W	IND SPEED or WIND	SPEED DESIGN above	does not require personal

Specify the type of mitigation device(s) installed:

\boxtimes	Roc	of Co	overings				
	X	Lev	evel A (Non FBC Equivalent) – Type II or III				
I			oof cover types and configurations that do not meet Level B below.				
			rel B (FBC Equivalent) – Type II or III f coverings that satisfy all of the following conditions and are one of the following types:				
		1.	Built-Up				
		2.	Modified Bitumen				
		3.	Sprayed Polyurethane foam				
		4.	Liquid membrane applied over concrete				
		5.	Asphalt roll roofing				
		6.	Wood shakes in good condition, attached with at least two mechanical fasteners				
		7.	Ballasted roof designed to meet the design wind speed requirements				
		8.	Asphalt roof coverings installed in accordance ASTM D 3161 (modified for 110 mph) or Miami Dade County PA 107-95.				
			All mechanical equipment must be adequately tied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems); and roof coverings on flat roofs must be 10 years old or less.				

MIT-BT II & III (8/2008)

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION VERIFICATION AFFIDAVIT

\boxtimes	Roo	f Deck Attachment
		Level A – Wood or Other Deck Type II only Roof deck composed of sheets of structural panels (plywood or OSB). Or Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or Other roof decks that do not meet Levels B or C below.
		Level B – Metal Deck Type II or III Metal roof deck made of structural panels that span from joist to joist.
		Level C – Reinforced Concrete Roof Deck Type, II or III A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system.
	Sec	ondary Water Resistance
		Underlayment N/A
		A self-adhering polymer modified bitumen roofing underlayment (thin labour sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all phywood/OSB joints to protect from water intrusion. All secondary water resistance products must be installed per the manufacturer's recommendations. Roofing felt or similar paper based products are not accordance for secondary water resistance.
		Foamed Adhesive
		A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion.
\boxtimes	Ope	ning Protection
\boxtimes	X	ning Protection Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:
\boxtimes	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant
	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:
\boxtimes	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12;
	X	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996;
		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203;
		Class A (Hurricane Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) — All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of:
		Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of: SSTD12; ASTM E 1886 and ASTM E 1996; Miami-Dade PA 201, 202, and 203; Florida Building Code TAS 201, 202 and 203. All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant

MIT-BT II & III (8/2008)

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION VERIFICATION AFFIDAVIT

CERTIFICATION

I certify that I am (CHECK ONE OF THE FOLLOWING):

Applicant's Signature:

🛮 a resident licensed General, or Building Contractor, 🗌 a Licensed Building Inspector, 🔲 a Registered Architect, an Engineer in the State of Florida, a Building Code Official (who is duly authorized by the State of Florida or its county's municipalities to verify building code compliance). I also certify that I personally inspected the premises at the Location Address listed above on the inspection date provided on this Affidavit. In my professional opinion, based on my knowledge, information and belief, I certify that the above statements are true and correct. This Affidavit and the information set forth in it are provided solely for the purpose of verifying that certain structural or physical characteristics exist at the Location Address listed above and for the purpose of permitting the Named Insured to receive a property insurance premium discount on insurance provided by Citizens Property Insurance Corporation and for no other purpose. The undersigned does not make a health or safety certification or warranty, express or implied, of any kind, and nothing in this Affidavit shall be construed to impose on the undersigned or on any entity to which the undersigned is affiliated any liability or obligation of any nature to the named insured or to any other person or entity. Dennis Higginbotham for Don Meyler Inspections (954) 749-7099 Name of Company: Phone: Dennis Higginbotham CBC1251874 License Type Building Name of Inspector 1/18/2013 Inspection Date: 1/18/2013 Signature:

"Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."

1/18/2013

Date:

MIT-BT II & III (8/2008)




Inspection Photos 5510 N. Ocean Blvd. - Bldg #3







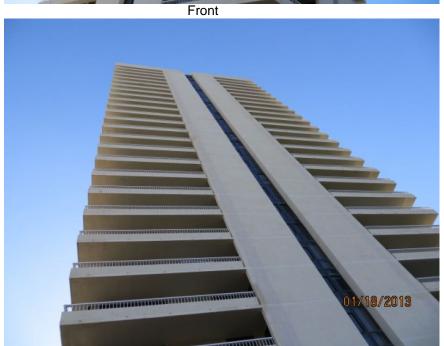



Left Right



Inspection Photos 5510 N. Ocean Blvd. - Bldg #3







Impact Rated Window Etching/Engraving - Typical Throughout Entire Bldg



Built-Up Tar & Gravel Roof Covering



Built-Up Tar & Gravel Roof Covering