

**Lamp measurement report – 31 Oct 2010**

**LVS A42 MR16 4W WW high CRI**

**by**

**Ledverlichting Soest**

*Photo courtesy by [www.Olino.org](http://www.Olino.org)*



## Lamp measurement report – 31 Oct 2010

### Summary measurement data


parameter	meas. result	remark
Color temperature	2888 K	Warm white
Luminous intensity $I_v$	321 Cd	Measured straight underneath the lamp.
Illuminance modulation index	5 %	Measured straight underneath the lamp. Is a measure for the amount of flickering.
Beam angle	29 deg	29° for all C planes as this lamp has a symmetry along the 1st axis.
Power P	3.2 W	
Power Factor	n.a.	A DC power supply was used to test. This means that there is no blind power.
THD	n.a. %	Total Harmonic Distortion is not present due to the usage of a DC Voltage which results in a DC current.
Luminous flux	114 Lm	
Luminous efficacy	36 Lm/W	Note that a DC power supply has been used. This efficacy is for the led only excluding the efficacy of a power supply converting grid voltage to the voltage or current needed for the led. Normally a power supply or converter adds in-efficacy to the total system unless this lamp is to be connected to for instance a battery.
EU-label classification	A	The energy class, from A (more efficient) to G (least efficient).
CRI_Ra	88	Color Rendering Index.
Coordinates chromaticity diagram	x=0.4486 and y=0.4133	

## Lamp measurement report – 31 Oct 2010

Fitting	MR16/GU5.3	This lamp can be connected to a 12 V DC or AC voltage. For this test a 12 V DC has been used.
PAR-value	3.2 $\mu\text{Mol/s/m}^2$	The number of photons seen by an average plant when it is lit by the light of this light bulb. Value valid at 1 m distance from light bulb.
PAR-photon efficacy	0.4 $\mu\text{Mol/s/W}_e$	The total emitted number of photons by this light, divided by its consumption in W. It indicates a kind of efficacy in generating photons.
S/P ratio	1.3	This factor indicates the amount of times more efficient the light of this light bulb is perceived under scotopic circumstances (low environmental light level).
D x H external dimensions	50 x 45 mm	External dimensions of the lamp.
D luminous area	33 mm	Dimensions of the luminous area (used in Eulumdat file). This is the surface of the prismatic glass at the front.
General remarks		<p>The ambient temperature during the whole set of measurements was 22.9-23.2 deg C.</p> <p>The temperature of the housing gets about 36 degrees hotter than ambient temperature.</p> <p>Warm up effect: during the warm up time the illuminance decreases with 11 % and the consumed power with less than 5 %.</p> <p>Voltage dependency: the power consumption and illuminance vary insignificantly, when the power voltage varies between 200-250 V.</p>

## Lamp measurement report – 31 Oct 2010

### Overview table

m.	Ø 50%		CO-180: 29° C90-270: 29° 	E (lux)	Luminaire Efficacy
	CO-180	C90-270			36 (lumen per Watt)
0.25	0.13	0.13		5141	Half-peak diam CO-180
0.5	0.25	0.25		1285	0.51 x diameter(m)
1	0.51	0.51		321	Half-peak diam C90-270
1.5	0.76	0.76		143	0.51 x diameter(m)
3	1.53	1.53		36	Illuminance
4	2.03	2.03		20	321 / distance <sup>2</sup> (lux)
5	2.54	2.54		13	Total Output
					114 (lumen)

The overview table is explained on the OLiNo website.


Please note that this overview table makes use of calculations, use this data with care as explained on the OLiNo site. E (lux) values are not accurate, when within 5 x 33 mm ≈ 175 mm. Within this distance from the lamp, the measured lux values will be less than the computed values in this overview as the measurements are then within the near field of the lamp.

### EU Energy label classification

With the measurement results of the luminous flux and the consumed power the classification on energy of this lamp is calculated. This information is requested in the EU for certain household lamps, see also the OLiNo site that explains for which lamps it is requested, how the label looks like and what information it needs to contain.

Herewith the labels for this lamp in color and black and white.

## Lamp measurement report – 31 Oct 2010

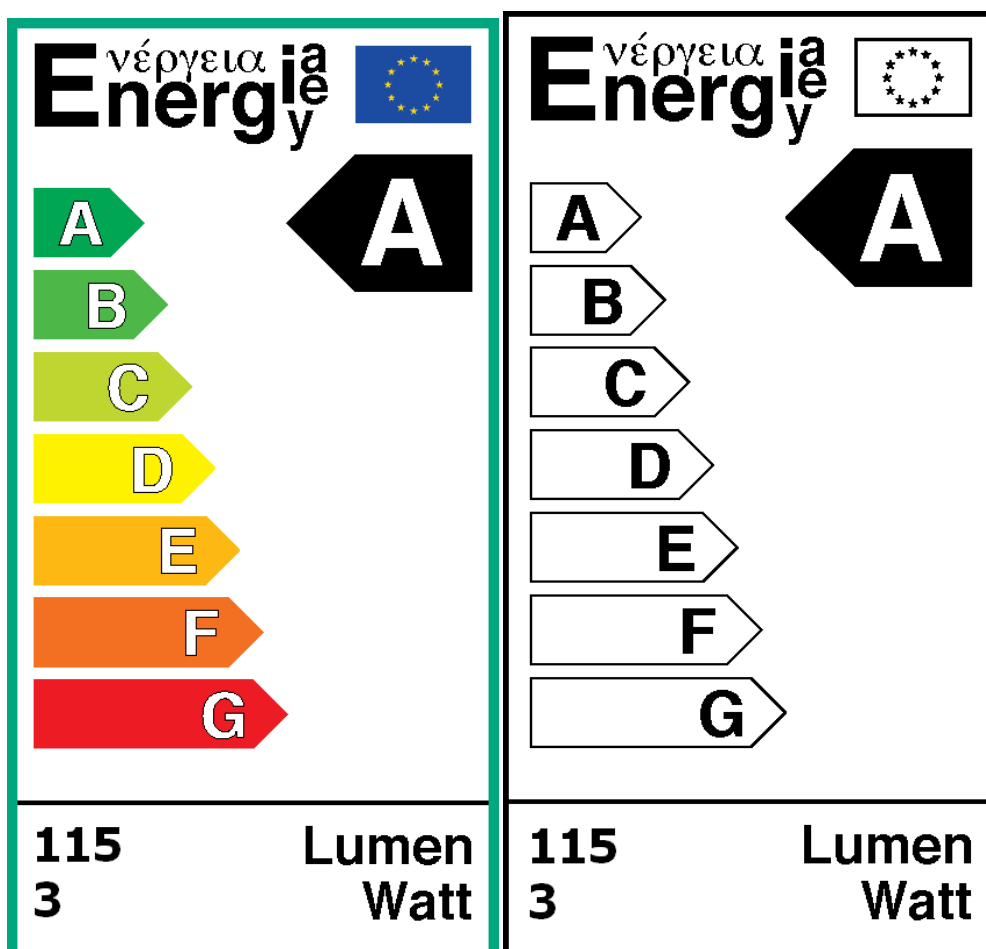


*EU energy label of this lamp*

### Eulumdat light diagram

This light diagram below comes from the program Qlumedit, that extracts these diagrams from an Eulumdat file. It is explained on the OliNo site.

## Lamp measurement report – 31 Oct 2010

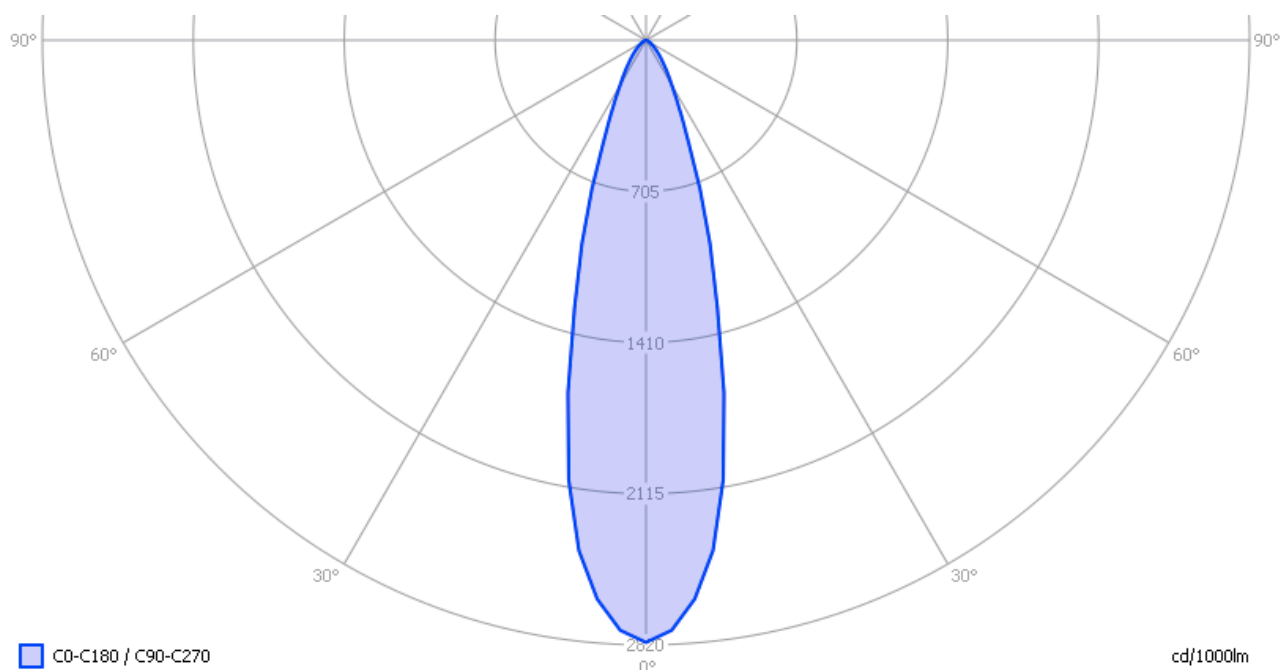

*The light diagram giving the radiation pattern.*


It indicates the luminous intensity around the light bulb. The C0-C180 plane and C90-C279 give the same result as the lamp is semmetrical along its 1st axis.

### Illuminance $E_v$ at 1 m distance, or luminous intensity $I_v$

Herewith the plot of the *averaged* luminous intensity  $I_v$  as a function of the inclination angle with the light bulb.




## Lamp measurement report – 31 Oct 2010

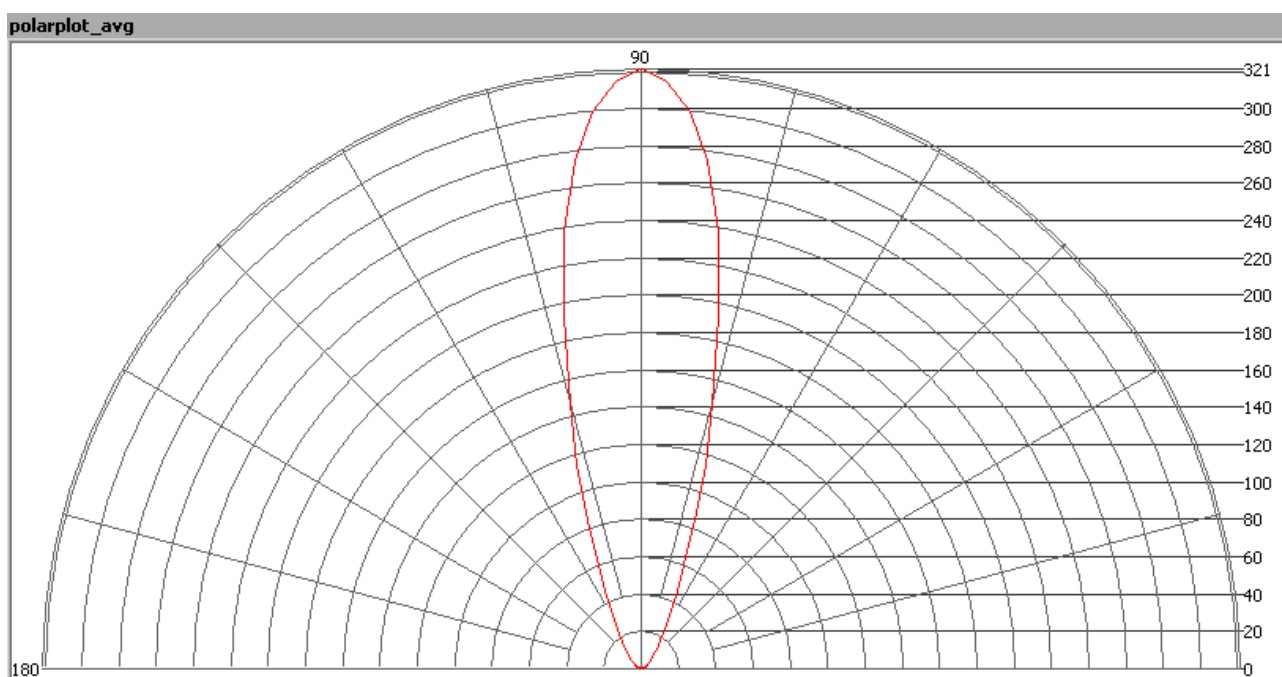

*The radiation pattern of the light bulb.*

This radiation pattern is the average of the light output of the light diagram given earlier. Also, in this graph the luminous intensity is given in Cd.

These averaged values are used (later) to compute the lumen output.

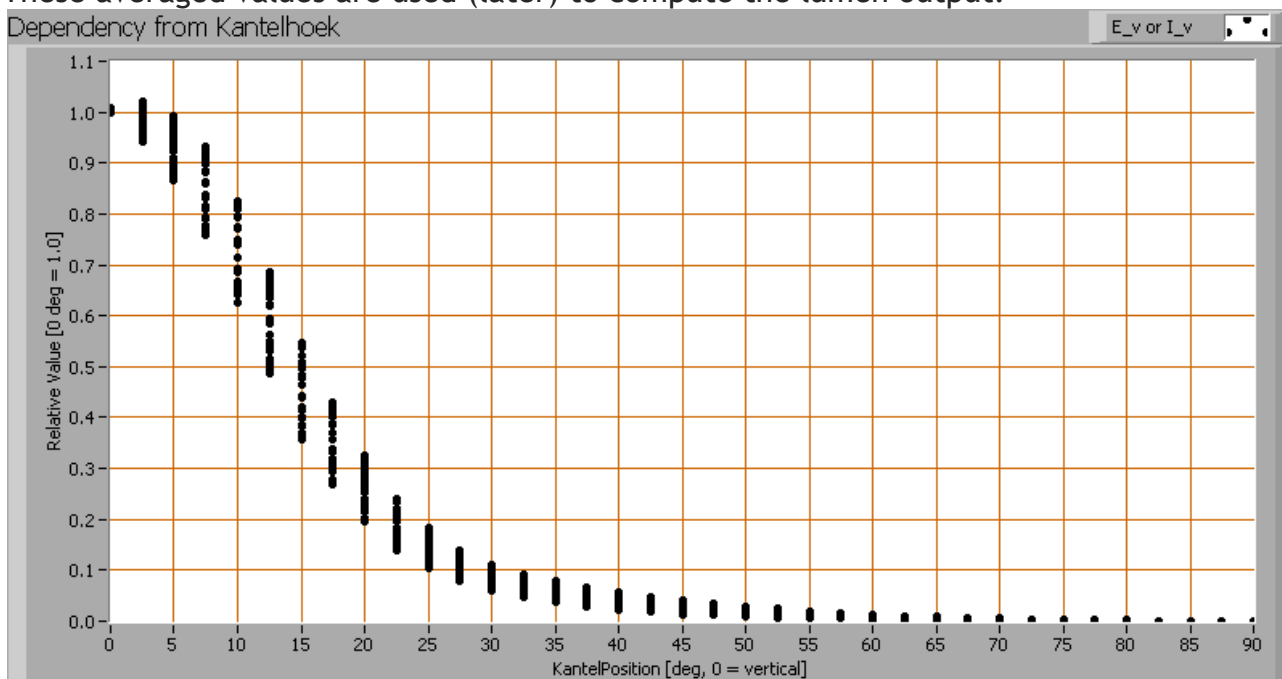

*Intensity data of every measured turn angle at each inclination angle.*



## Lamp measurement report – 31 Oct 2010

This plot shows per inclination angle the intensity measurement results for each turn angle at that inclination angle. There normally are differences in illuminance values for different turn angles. However for further calculations the averaged values will be used. When using the average values per inclination angle, the beam angle can be computed, being 29° for the C0-C180 and the C90-C270 plane.

### Luminous flux

With the averaged illuminance data at 1 m distance, taken from the graph showing the averaged radiation pattern, it is possible to compute the luminous flux.

The result of this computation for this light spot is a luminous flux of 114 Lm.

### Luminous efficacy

The luminous flux being 114 Lm, and the power of the light bulb being 3.2 W, yields a luminous efficacy of 36 Lm/W.

The reported efficacy is for the ledmodules only, without an eventual power supply needed to transform 230 V AC into 12 V DC. Such a power supply would normally lead to additional power consumption.

### Electrical properties


The lamp was used on DC power and therefore no blind currents.

Lamp voltage	12 V DC
Lamp current	0.265 A
Power P	3.2 W
Apparent power S	n.a. VA
Power factor	n.a.



## Lamp measurement report – 31 Oct 2010


### Temperature measurements lamp

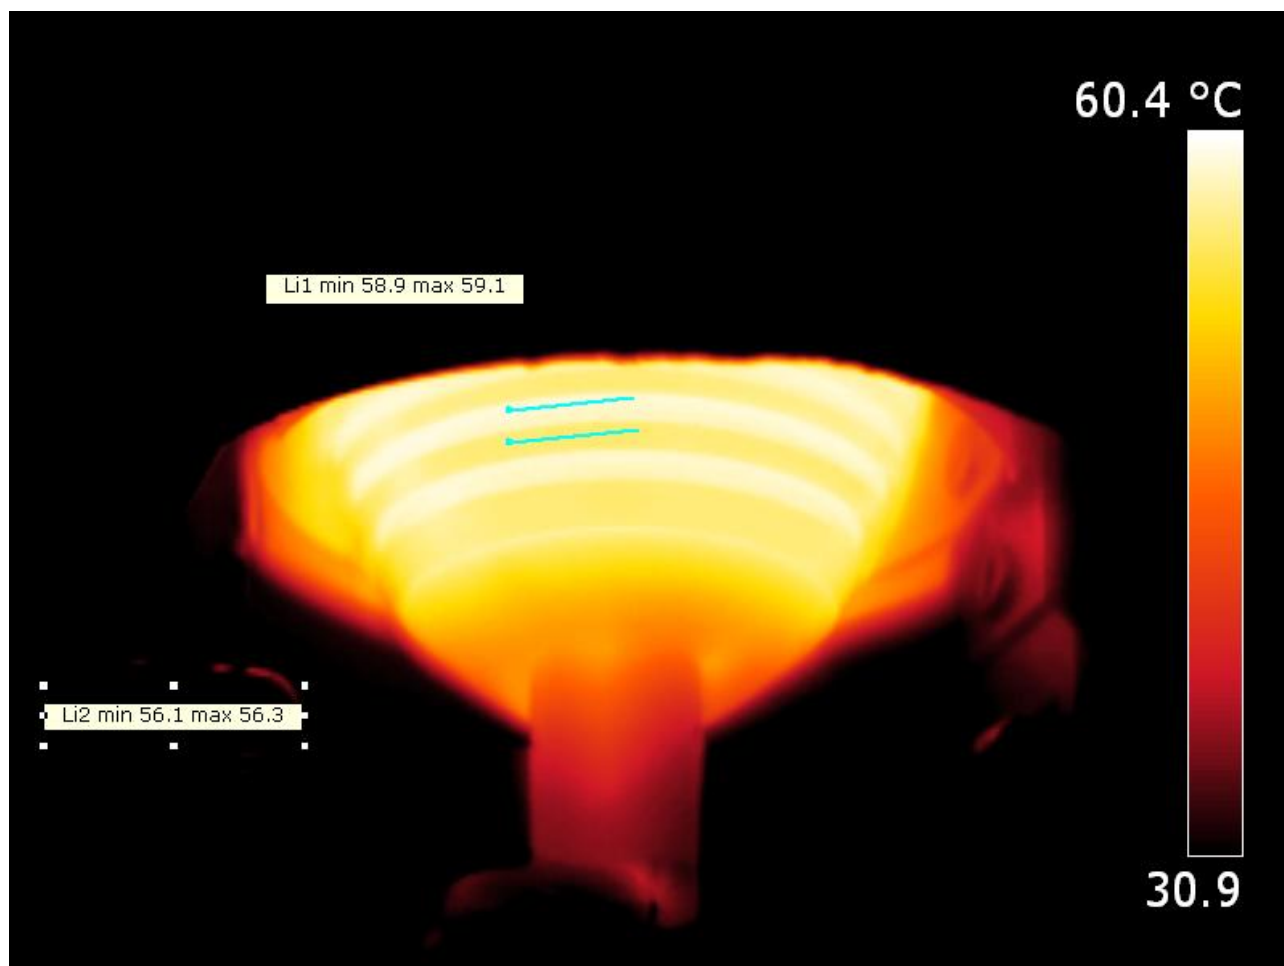

*Side view.*

The aluminum has a high emissivity, here taken 0.95.

## Lamp measurement report – 31 Oct 2010

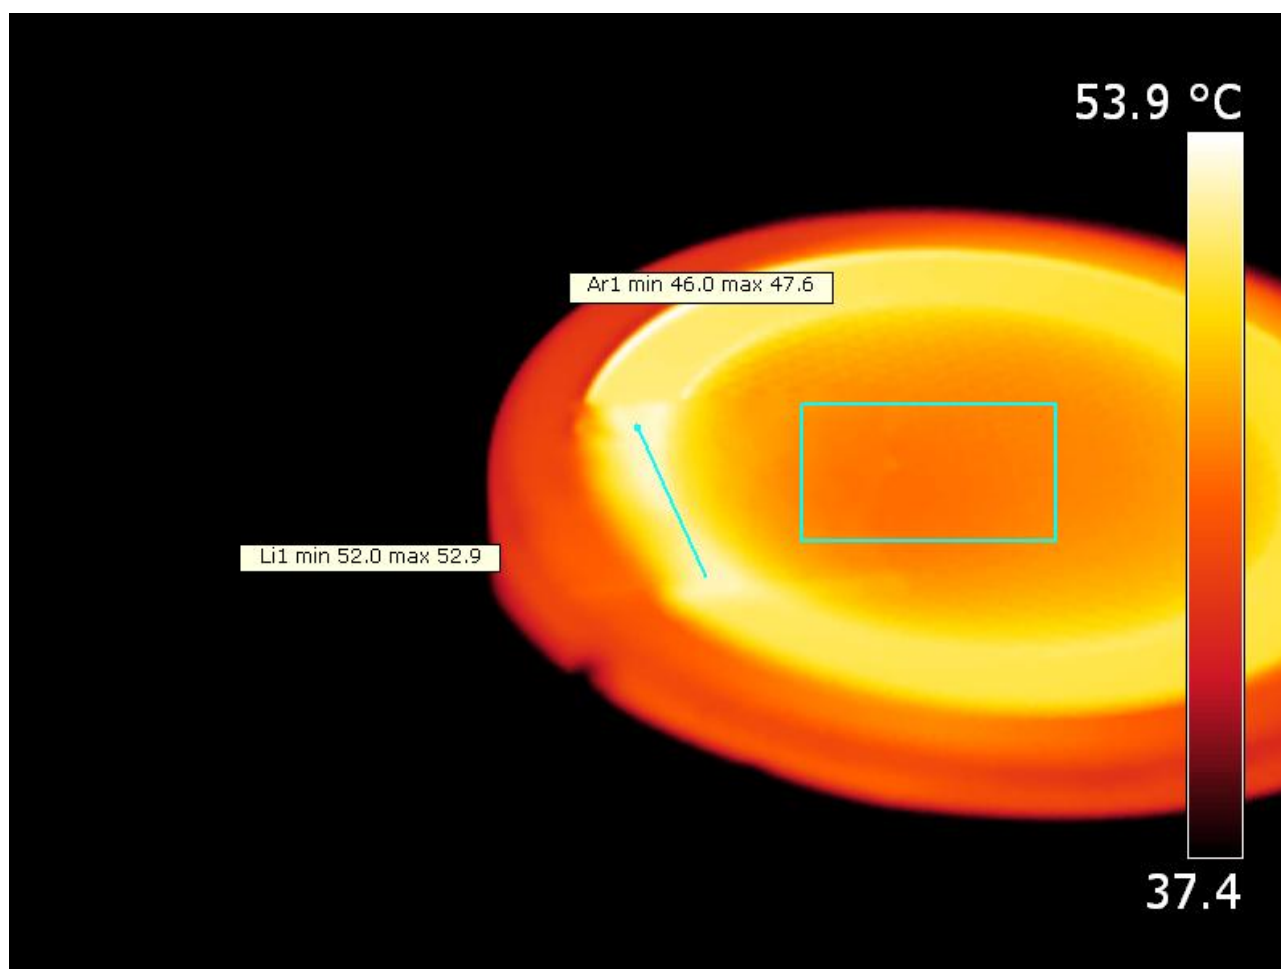

*Temperature image where the front is measured; the glass and the metal ring around it.*

The piece of masking tape is visible on the metal ring around the glass. The metal ring measured directly reads somewhat lower in temperature, indicating that it reflects some of the surrounding temperature. This can be corrected, with help of a lower emissivity. But here the tape is used to get a good value for the temperature of the ring. The glass in front of the leds has a high emissivity, qually high as the masking tape as the tape is not really visible.


status lamp	> 2 hours on
ambient temperature	23 deg C
reflected background temperature	23 deg C
camera	Flir T335
emissivity	0.95 <sup>(1)</sup>

## Lamp measurement report – 31 Oct 2010

measurement distance	2 m
IFOV <sub>geometric</sub>	0.136 mm per 0.1 m distance
NETD (thermal sensitivity)	50 mK

<sup>(1)</sup> See the text for explanation.

### Color temperature and Spectral power distribution

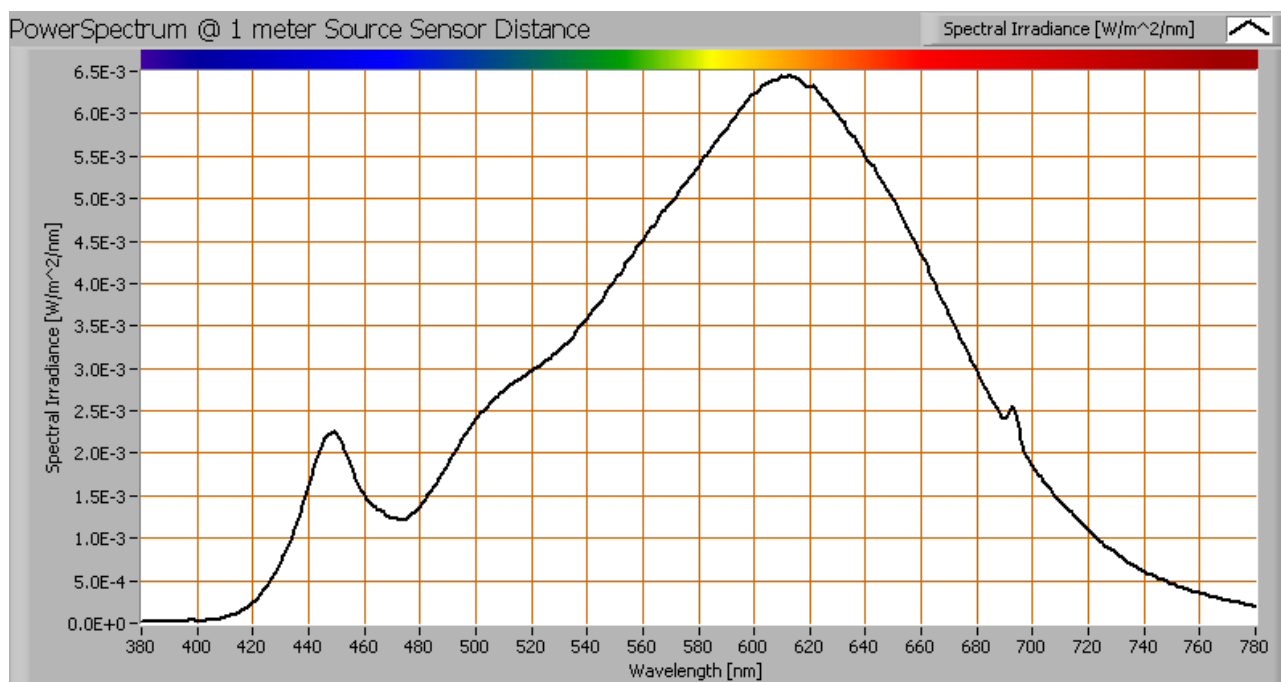


*The spectral power distribution of this light bulb, energies on y-axis valid at 1 m distance.*

The measured color temperature is about 2900 K which is warm white.

This color temperature is measured straight underneath the light bulb. Below a graph showing the color temperature for different inclination angles.

## Lamp measurement report – 31 Oct 2010

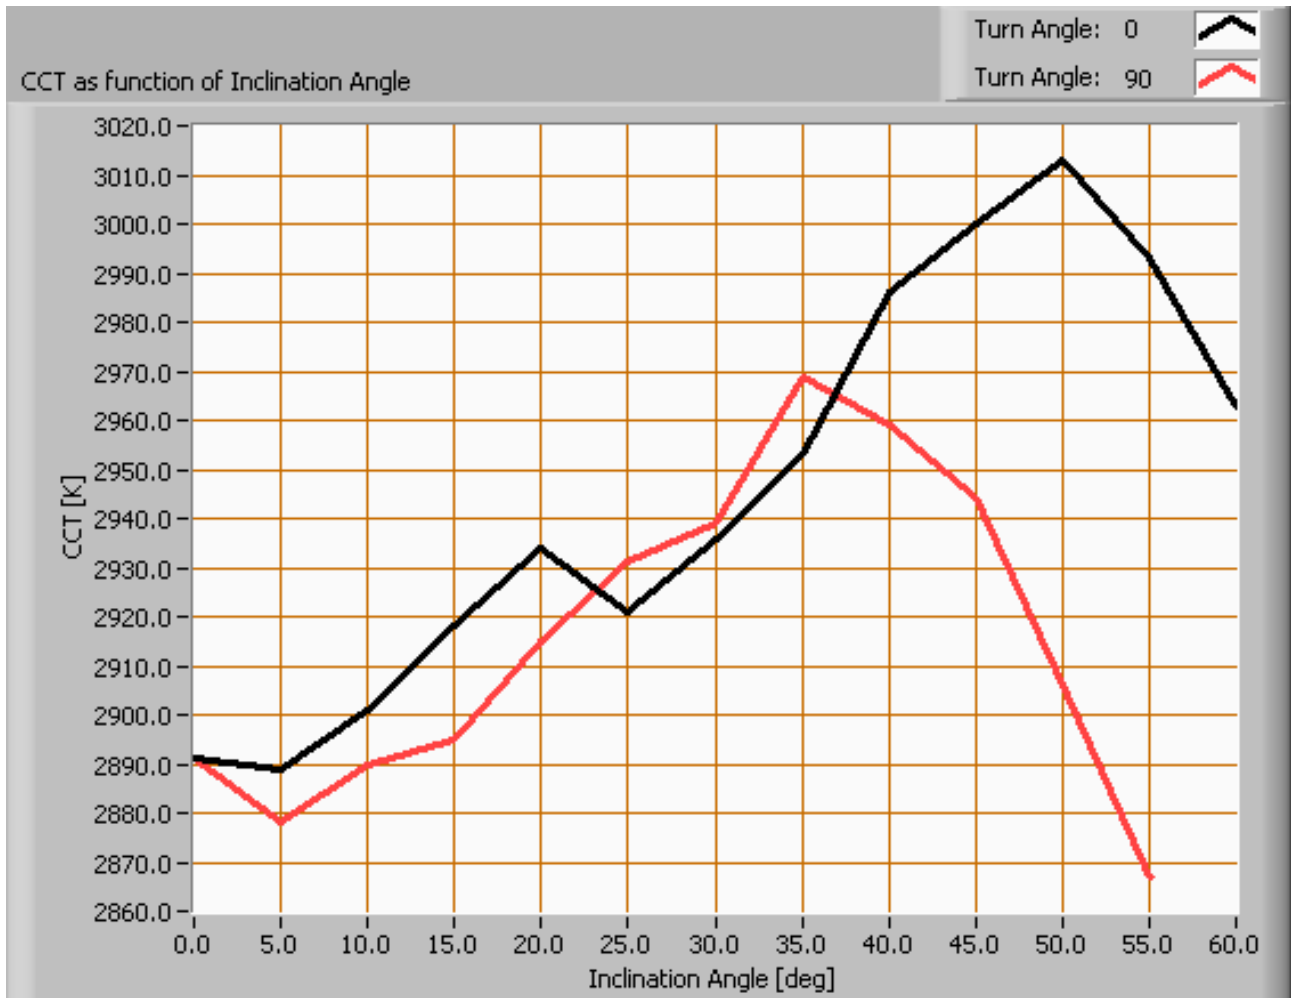

*Color temperature as a function of inclination angle.*


The measurement of CCT is measured for inclination angles up to 55°. Beyond this angle the illuminance is very low (< 5 lux).

The beam angle is 29°, meaning a 14.5° inclination angle. In this area most of the light is present. The variation in correlated color temperature in this area is about < 1 %.

## Lamp measurement report – 31 Oct 2010

### PAR value and PAR spectrum

To make a statement how well the light of this light bulb is for growing plants, the PAR-area needs to be determined. See the OLiNo website how this all is determined and the explanation of the graph.

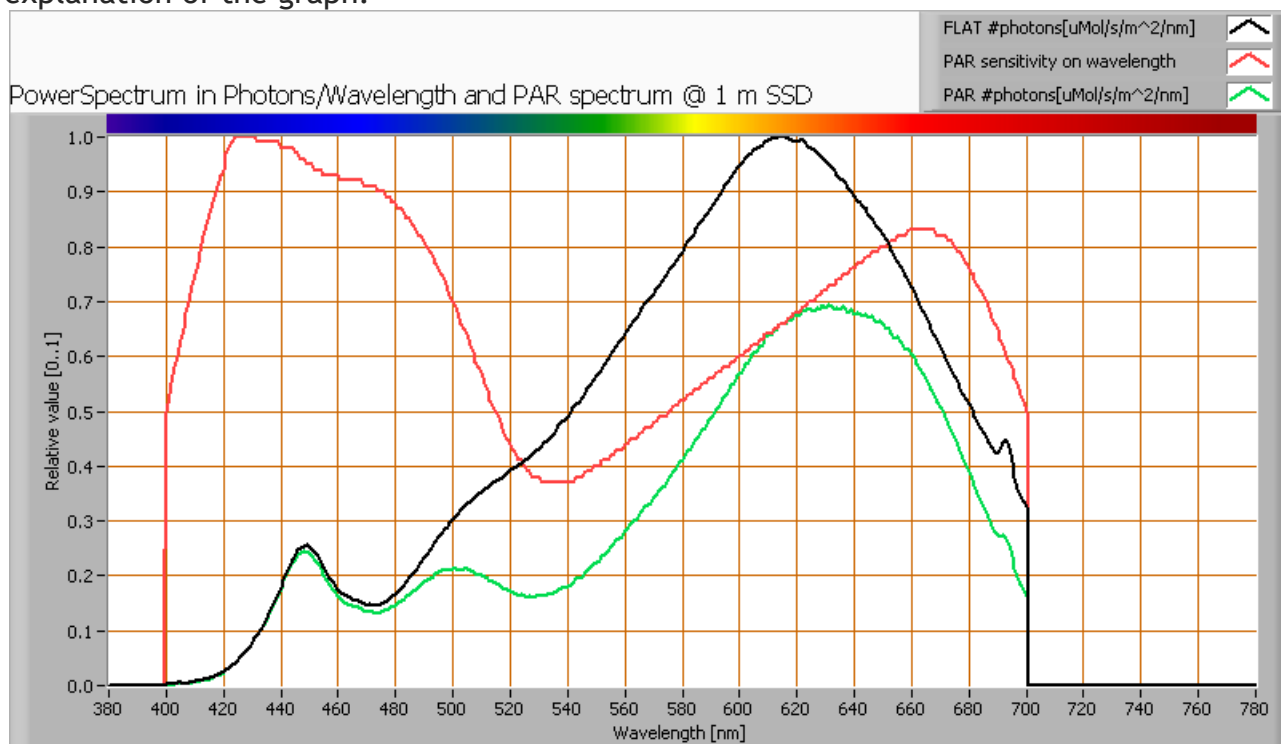

*The photon spectrum, then the sensitivity curve and as result the final PAR spectrum of the light of this light bulb*


parameter	value	unit
PAR-number	3.2	μMol/s/m <sup>2</sup>
PAR-photon current	1.1	μMol/s
PAR-photon efficacy	0.4	μMol/s/W

The PAR efficiency is 65 % (valid for the PAR wave length range of 400 - 700 nm). So maximally 65 % of the total of photons in the light is effectively used by the average plant (since the plant might not take 100 % of the photons at the frequency where its relative sensitivity is 100 %).

## Lamp measurement report – 31 Oct 2010

### S/P ratio

The S/P ratio and measurement is explained on the OliNo website. Here the results are given.

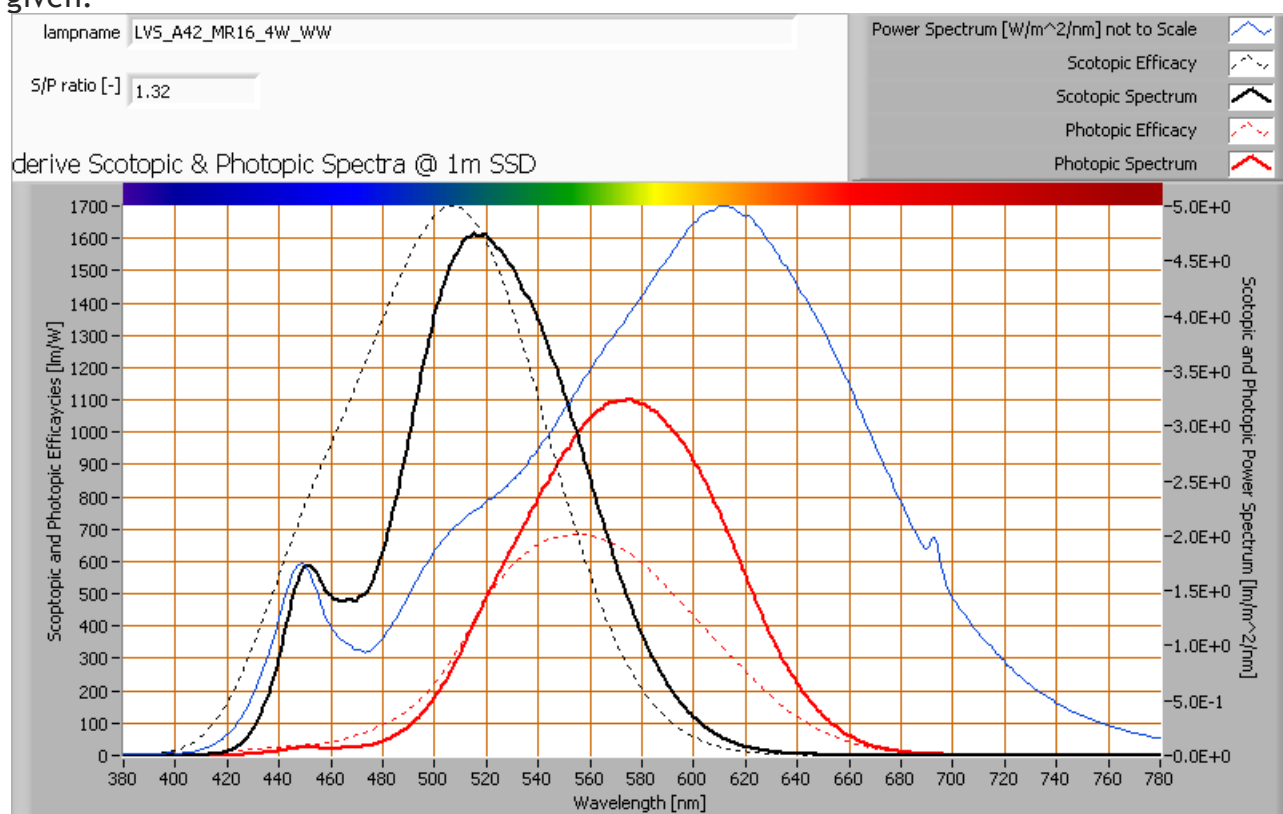


*The power spectrum, sensitivity curves and resulting scotopic and photopic spectra (spectra energy content defined at 1 m distance).*

The S/P ratio is 1.3.

More info on S/P ratio can be found on the OliNo website.

## Lamp measurement report – 31 Oct 2010

### Chromaticity diagram

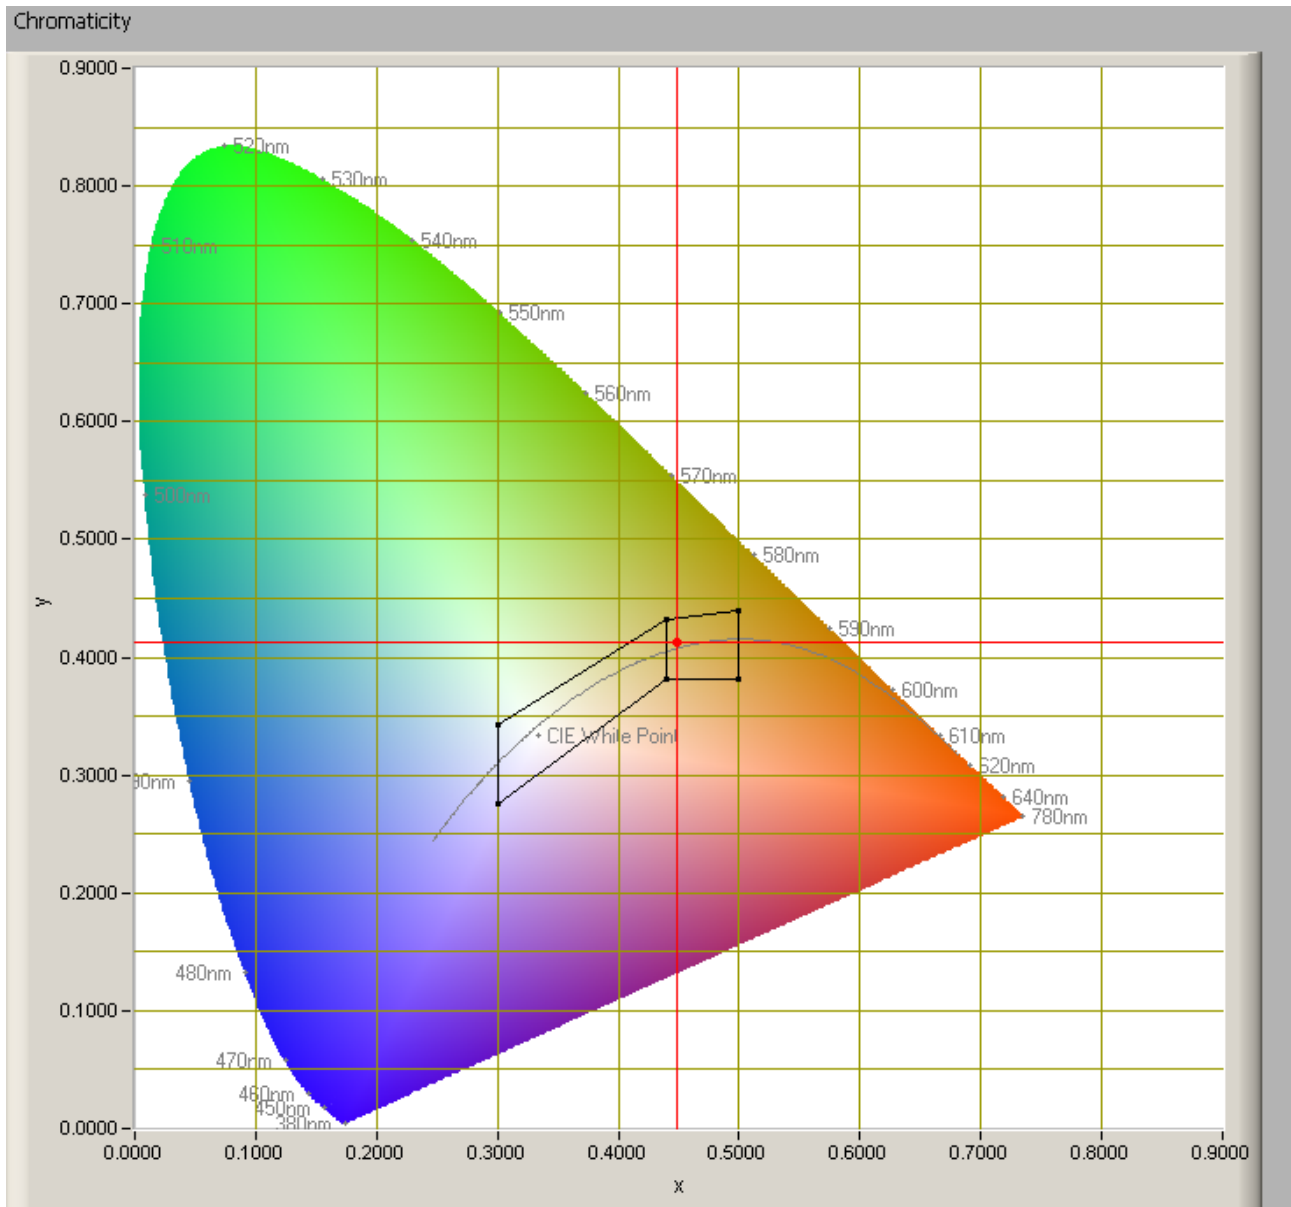

*The chromaticity space and the position of the lamp's color coordinates in it.*

The light coming from this lamp is inside the area of class B. This is an area defined for signal lamps, see also the OliNo website.

Its coordinates are  $x=0.4486$  and  $y=0.4133$ .



## Lamp measurement report – 31 Oct 2010

### Color Rendering Index (CRI) or also Ra

Herewith the image showing the CRI as well as how well different colors are represented (rendered). The higher the number, the better the resemblance with the color when a black body radiator would have been used (the sun, or an incandescent lamp). Practical information and also some critics about the CRI can be found on the OliNo website.

Each color has an index  $R_x$ , and the first 8 indexes ( $R_1 \dots R_8$ ) are averaged to compute the  $R_a$  which is equivalent to the CRI.

☐ manual

Reference Illuminant
 

Planckian radiator















 CCT
 

2888

 K

Chromaticity Difference DC=
 

2.1E-3

R1= 86.4		R8= 71.4		<b>R<sub>a</sub></b> (mean value of R1 - R8) <div>88</div>
R2= 93		R9= 35.6		
R3= 98.6		R10= 84.3		
R4= 87.1		R11= 87		
R5= 86.6		R12= 81.3		
R6= 92.1		R13= 87.7		
R7= 88.7		R14= 99.4		

*CRI of the light of this lightbulb.*

The value of 88 is (much) higher than the value 80 which is considered a minimum value for indoor usage.

Note: the chromaticity difference is 0.0021 indicates the distance to the Planckian Locus. There is no norm yet that states what the max deviation from white light is allowed to be. A reference with signal lights as a reference is given in the chromaticity diagram.


### Voltage dependency

The dependency of a number of lamp parameters on the lamp voltage is determined. For this, the lamp voltage has been varied and its effect on the following light bulb

## Lamp measurement report – 31 Oct 2010

parameters measured: illuminance  $E_v$  [lx], the lamppower  $P$  [W] and the luminous efficacy [lm/W].

**Dependency on lamp parameters on  $V_{\text{lamp}}$**

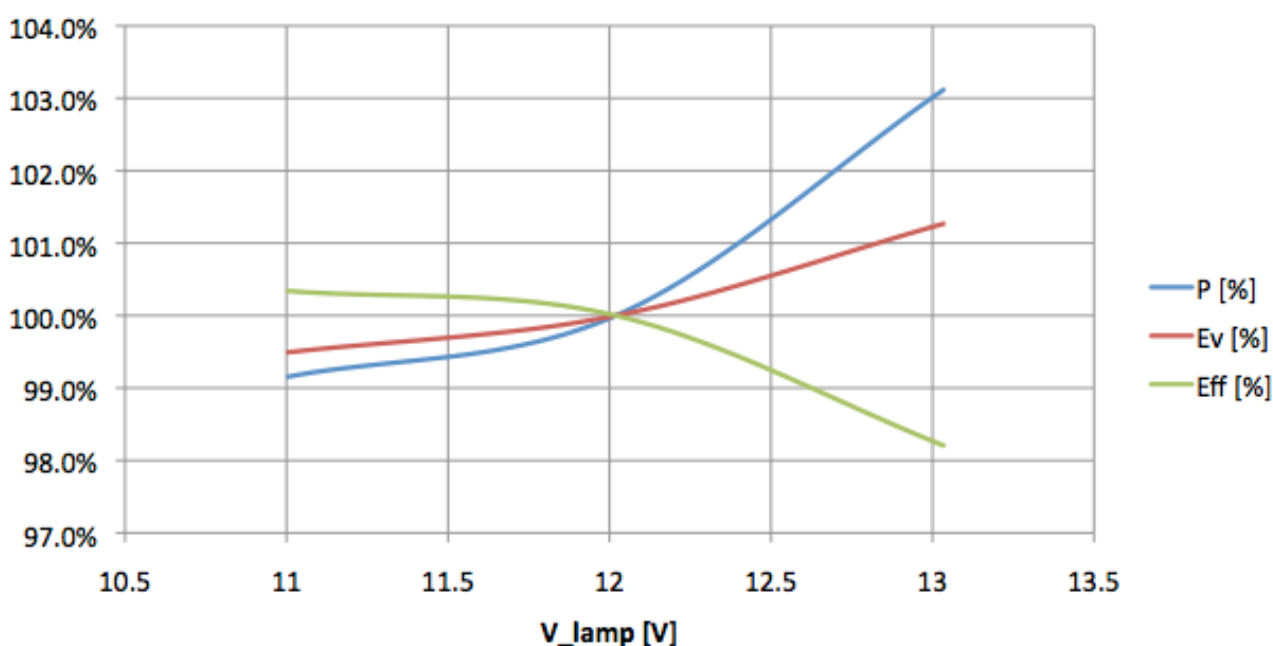


*Lamp voltage dependencies of certain light bulb parameters, where the value at 12 V is taken as 100 %.*

The illuminance and consumed power vary insignificantly when the voltage is varied. When the voltage at 24 V varies with + and - 0.25 V, then the illuminance varies  $\approx 0.25$  %, so when abrupt voltage changes occur this effect is not visible in the illuminance output.

## Warm up effects

After switch on of a cold lamp, the effect of heating up of the lamp is measured on illuminance  $E_v$  [lx], the lamppower  $P$  [W] and the luminous efficacy [lm/W].

## Lamp measurement report – 31 Oct 2010

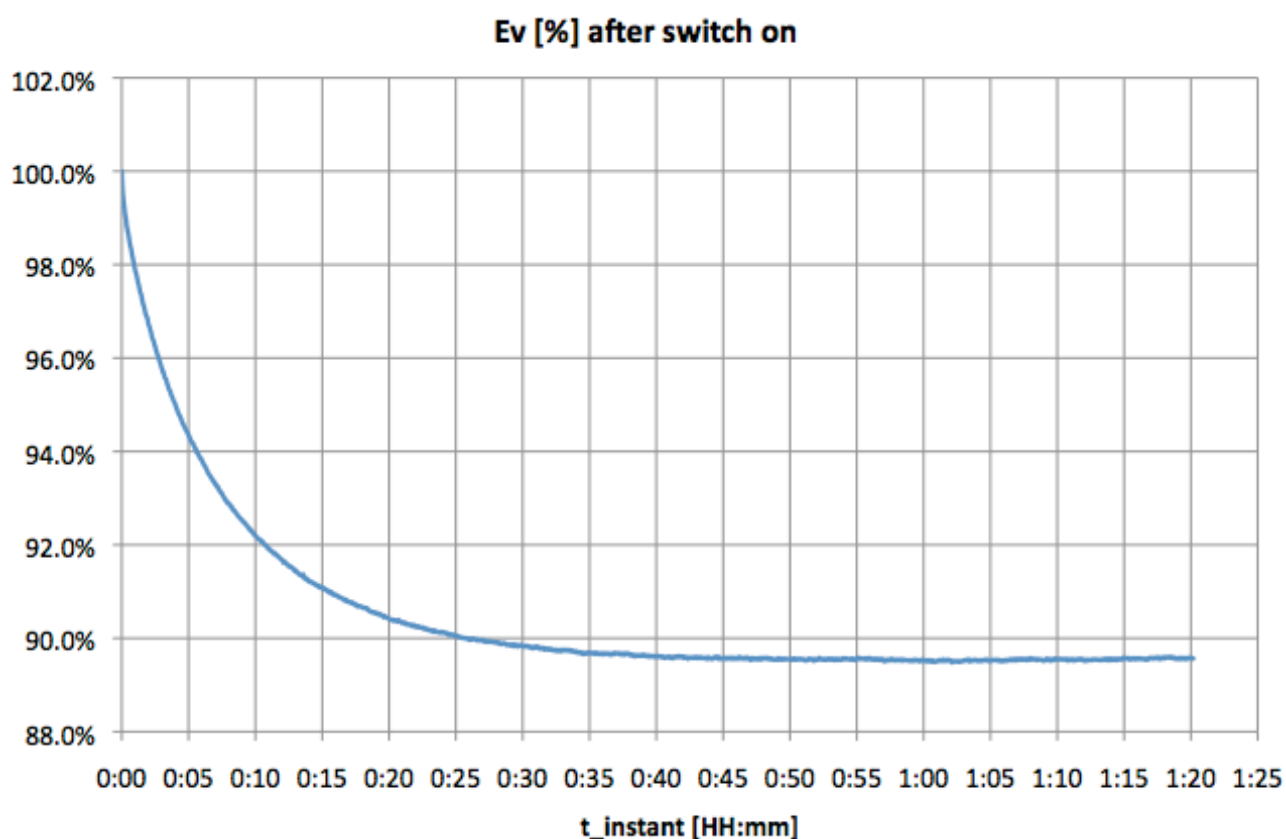


*Effect of warming up on different light bulb parameters. The 100 % level is put at the beginning.*

The warm up time is about 30 minutes during which the illuminance decreases 11 % and the consumed power decreases with less than 5 % (measured separately).

### Measure of flickering

An analysis is done on the measure of flickering of the light output by this light bulb. See the OliNo site for more information.

## Lamp measurement report – 31 Oct 2010

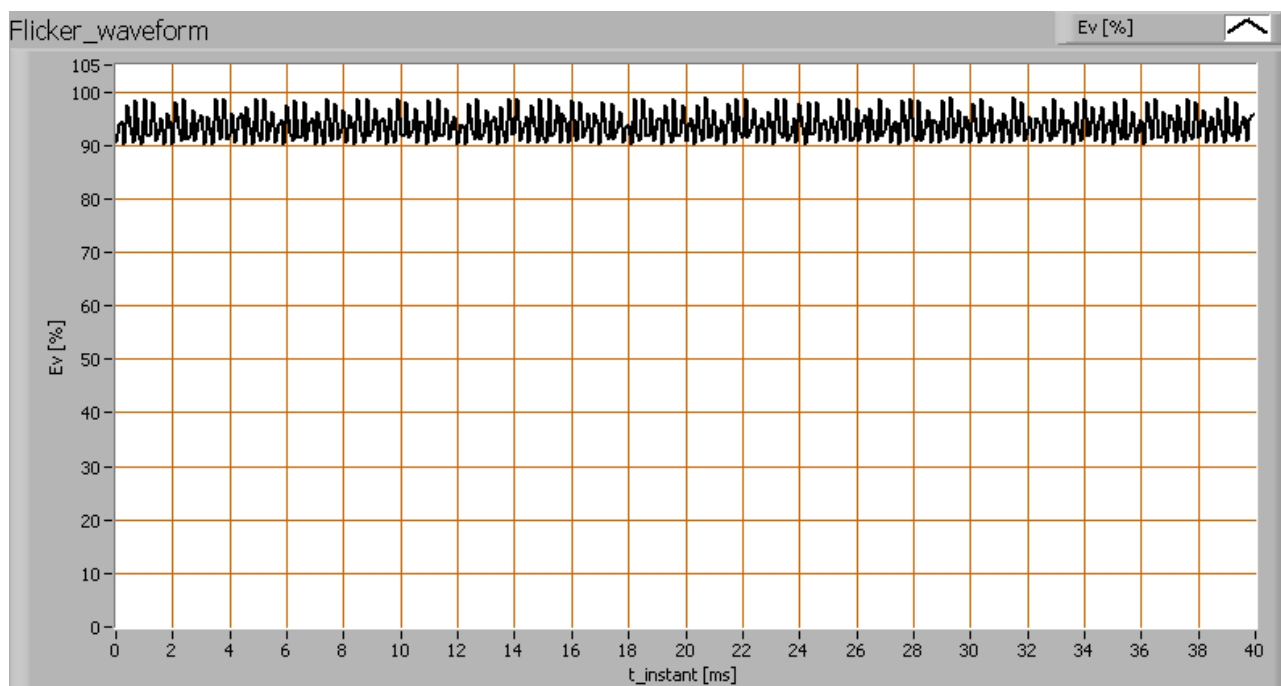

*The measure of fast illuminance variation of the light of the light bulb*

parameter	value	unit
Flicker frequency	3600	Hz
Illuminance modulation index	5	%

The illuminance modulation index is computed as:  $(\max\_Ev - \min\_Ev) / (\max\_Ev + \min\_Ev)$ .

Note: with such a high flicker frequency any modulation will not be visible.

### Disclaimer

The information in this OliNo report is created with the utmost care. Despite this, the information could contain inaccuracies. OliNo cannot be held liable in this instance nor can the data in this report be legally binding.

We strive to adhere to all of the conditions of any copyright holder in the publication of any illustration/article or item. In the event that we unintentionally violate said copyright holder's conditions in our articles, we kindly ask to be contacted here at OliNo so that we can resolve any disputes, issues or misunderstandings.



## **Lamp measurement report – 31 Oct 2010**

### **License**

It is permitted ONLY to use or publish this report in its entirety and in unaltered form via internet or other digital or written media in any form. To guarantee the reliability and accuracy of the report, it is strictly probited to change or alter parts of the report and/or republish it in a modified content.