


# FLOATING



# AacerFlex™

AacerFlex<sup>™</sup> incorporates precision engineered pads that integrates load bearing ability with enhanced athletic performance. AacerFlex can be specified for multipurpose rooms, competitive sports applications and dance/aerobics. Available in AacerFlex<sup>™</sup>, AacerFlex<sup>™</sup> TP, and AacerFlex<sup>™</sup> EN-DIN.

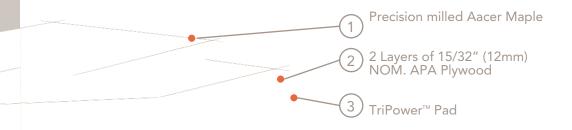

# Certified











#### Green Status LEED Contributors





FSC® Certified Maple - MRc7 FSC® Certified SubFloor Components - MRc7 EQ – 4.2 Regional Materials - MRc5.1 & 5.2

#### **Optional Versions**

50 duro blue, 60 duro orange, 70 duro red TriPower™, AacerFlex, EcoDIN, 1/2" TriPower™ Pad

# Resilience

Aacer TriPower™ Pad

#### Slab Depression

# 3/4" (19mm) TriPower™ Pad, AacerFlex

25/32" (20mm) flooring - 2 1/2" (64mm) 33/32" (26mm) flooring - 2 3/4" (70mm)

# 1/2" (12mm) TriPower™ Pad

25/32" (20mm) flooring - 2 1/4" (57mm) 33/32" (26mm) flooring - 2 1/2" (64mm)

#### 7/16" (11mm) EcoDIN Pad

25/32" (20mm) flooring - 2 1/8" (55mm) 33/32" (26mm) flooring - 2 7/8" (73mm)

# Subfloor Construction

Plywood

#### System Type

Floating System

## **Testing Laboratory**









#### Warranty

Lifetime available


## WALL BASE



# THRESHOLD



#### EQUIPMENT



AacerFlooring.com

(877) 582-1181

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.