

Model E Series

ELECTRIC BOOM LIFTS



Features

- Eight 6V 370 Amp-Hour Deep Cycle Batteries
- Automatic Traction Control (ATC)
- Inward Self-Closing Swing Gate
- 180 Degree Hydraulic Platform Rotator
- 110V-AC Receptacle on Platform
- 5 Degree Tilt Alarm/Indicator Light
- Hourmeter
- Battery Condition Indicator
- Lifting/Tie Down Lugs
- Horn
- Operator Tool Tray
- All Motion Alarm

Accessories & Options

- Platform Worklights
- Mesh to Top Rail—Bolt-on Aluminum
- Acrylic Console Shield
- Cylinder Bellows
- UL® EE Rating¹
- Flashing Amber Beacon

1. Not available on Multi-Powered models

Please refer to the JLG Aerial Work Platform Sales Manual for additional features and accessories.

Specifications

Reach

Platform Height	
E300AJ/E 300AJP	30 ft (9.14 m)
E400A/E400AJP	40 ft (12.19 m)
E400A Narrow/E400AJP Narrow	40 ft (12.19 m)
E450A/E450AJ	45 ft (13.72 m)
Horizontal Outreach	
E400A/E400AJP	21 ft 2 in. (6.45 m)
E400A Narrow/E400AJP Narrow	21 ft 2 in. (6.45 m)
E450A	23 ft 1 in. (7.04 m)
With Jib	
E300AJ	20 ft (6.1 m)
E450AJ	23 ft 9 in. (7.24 m)
With JibPLUS	
E300AJP	20 ft 6 in. (6.25 m)
E400AJP/E400AJP Narrow	22 ft 5 in. (6.83 m)
Up and Over Height	
E300AJ/E300AJP	13 ft 1 in. (3.99 m)
E400A/E400AJP	21 ft 6 in. (6.55 m)
E400A Narrow/E400AJP Narrow	21 ft 6 in. (6.55 m)
E450A	24 ft 7 in. (7.49 m)
E450AJ	25 ft 3 in. (7.7 m)
Swing	360 Degrees Non-Continuous
Platform Capacity	500 lb (227 kg)
Platform Rotator	180 Degrees Hydraulic
Jib (range of articulation)	
E300AJ/E300AJP	144 Degrees (+84, -60) Vertical
E450AJ	141 Degrees (+86, -55) Vertical
JibPLUS	
E300AJP/E400AJP/E400AJP Narrow	180 Degrees Horizontal
E400AJP/E400AJP Narrow	144 Degrees (+84, -60) Vertical

(continued on back page)



Versatility to Meet Your Needs

- Choose from three popular platform heights and three chassis widths
- Non-jib and optional jib models
- Automatic traction control for on and off slab mobility
- Zero emissions and low noise

Power to Stay On the Job Longer


- Industry-leading duty cycles
- Multi-power models provide round-the-clock operation and faster battery charging

Unmatched Reach and Positioning Capabilities


- Exclusive JibPLUS® boom option provides 180-degree range of side-to-side movement
- 48 in. narrow chassis models for narrow aisles
- Near vertical jib positioning and access to areas other machines can't reach
- Multiple function operation for efficient maneuvering in tight spaces

Specifications


E300

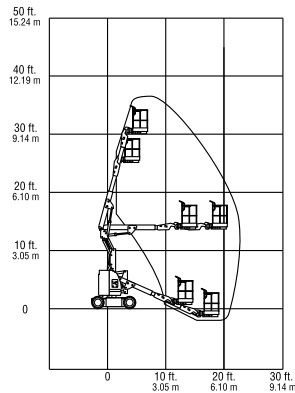

E400

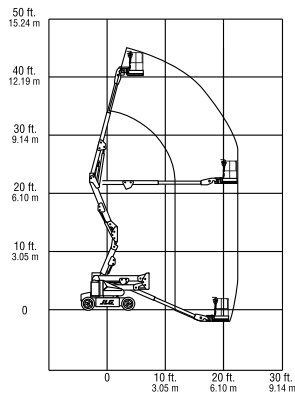

E450

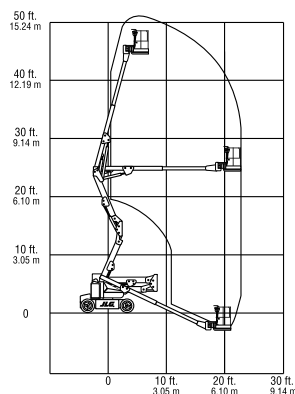

Dimensions

Platform Size	
E300AJ/E300AJJP	30 x 48 in. (0.76 x 1.22 m)
E400A Narrow	30 x 48 in. (0.76 x 1.22 m)
E400AJJP Narrow	30 x 48 in. (0.76 x 1.22 m)
E400AJ/E400AJJP	30 x 60 in. (0.76 x 1.52 m)
E450A/E450AJ	30 x 60 in. (0.76 x 1.52 m)
Overall Width	
E300AJ/E300AJJP	4 ft (1.22 m)
E400A/E400AJJP/E450A/E450AJ	5 ft 9 in. (1.75 m)
E400A Narrow/E400AJJP Narrow	4 ft 11 in. (1.5 m)
Tailswing	
E300AJ/E300AJJP/E400A	Zero
E400AJJP/E450A/E450AJ	Zero
E400A Narrow/E400AJJP Narrow	4 in. (10 cm)
Stowed Height	
E300AJ/E300AJJP/E400A	6 ft 7 in. (2.0 m)
E400AJJP/E450A	6 ft 7 in. (2.0 m)
E400A Narrow/E400AJJP Narrow	6 ft 5.75 in. (1.97 m)
E450A	6 ft 6 in. (1.98 m)
Stowed Length	
E400A/E400AJJP/E400A Narrow	18 ft 1 in. (5.5 m)
E400AJJP Narrow	18 ft 1 in. (5.5 m)
E450A	19 ft 1 in. (5.82 m)
With Jib	
E300AJ	18 ft (5.49 m)
E450AJ	21 ft 2 in. (6.45 m)
With JibPLUS	
E300AJJP/E400AJJP	18 ft 8 in. (5.70 m)
E400AJJP Narrow	22 ft (6.7 m)
Wheelbase	
E300AJ/E300AJJP	5 ft 5 in. (1.65 m)
E400A/E400AJJP/E400A Narrow	6 ft 7 in. (2.0 m)
E400AJJP Narrow/E450A/E450AJ	6 ft 7 in. (2.0 m)
Ground Clearance	
E300AJ/E300AJJP	4 in. (10 cm)
E400A/E400AJJP/E450A/E450AJJP	8.5 in. (22 cm)
E400A Narrow/E400AJJP Narrow	5 in. (13 cm)
Weight	
E400A/E400AJJP	12,100 lb (5,488 kg)
E400A Narrow/E400AJJP Narrow	13,100 lb (5,942 kg)
E450A	12,600 lb (5,715 kg)
With Jib	
E300AJ	15,400 lb (6,985 kg)
E450AJ	14,400 lb (6,532 kg)
With JibPLUS	
E300AJJP	15,800 lb (7,166 kg)
E400AJJP	13,700 lb (6,214 kg)
E400AJJP Narrow	14,900 lb (6,759 kg)
Ground Bearing Pressure	
E300AJ/E300AJJP	121 psi (8.47 kg/cm ²)
E400A/E400AJJP	80 psi (5.6 kg/cm ²)
E400A Narrow/E400AJJP Narrow	95 psi (6.7 kg/cm ²)
E450A	64 psi (4.48 kg/cm ²)
E450AJ	75 psi (5.25 kg/cm ²)
With JibPLUS	
E300AJJP	130 psi (9.1 kg/cm ²)
E400AJJP	74 psi (5.2 kg/cm ²)
E400AJJP Narrow	185 psi (13.0 kg/cm ²)

Chassis

Drive Speed	
E300AJ/E300AJJP	3.0 mph (4.8 kmph)
E400A Narrow/E400AJJP Narrow	3.0 mph (4.8 kmph)
E400A/E400AJJP/E450A/E450AJ	3.2 mph (5.2 kmph)
Gradeability	
E300AJ/E300AJJP	25%
E400A/E400AJJP/E400A Narrow	30%
E400AJJP Narrow/E450A/E450AJ	30%
Turning Radius (Outside)	
E300AJ/E300AJJP	5 ft (1.52 m)
E400A/E400AJJP/E450A/E450AJ	2 ft (61 cm)
E400A Narrow/E400AJJP Narrow	2 ft 10 in. (86 cm)
Turning Radius (Inside)	
E300AJ/E300AJJP	10 ft 2 in. (3.1 m)
E400A/E400AJJP/E400A Narrow	10 ft 4 in. (3.15 m)
E400AJJP Narrow/E450A/E450AJ	10 ft 4 in. (3.15 m)
Tire Size/Type	
E300AJ/E300AJJP	7.5 x 12 Non-Marking
E400A/E400AJJP	240/55-17.5 pneumatic
E450A/E450AJ	240/55-17.5 pneumatic
Tire Size/Type (front)	
E400A Narrow/E400AJJP Narrow	22 x 6 x 17.5 Non-Marking
Tire Size/Type (back)	
E400A Narrow/E400AJJP Narrow	22 x 7 x 12 Non-Marking

Power Source

Electrical System	48V DC
Batteries	8 x 6V, 370 amp-hr
Drive Motors	Dual Electric Traction
Brakes	Automatic Spring Applied Multiple Disks
Hydraulic Motor/Pump	Permanent Magnet Motor/Gear Pump
Hydraulic Reservoir	
E300AJ/E300AJJP	3 gal. (11.4 L)
E400A/E400AJJP/E400A Narrow	4 gal. (15.2 L)
E400AJJP Narrow/E450A/E450AJ	4 gal. (15.2 L)
Generator Set (Multi-Power Options)	
E400A/E400AJJP/E400A Narrow	Fully Automatic, 45 Amp Kubota 6 hp Air-Cooled Engine
E400AJJP Narrow/E450A/E450AJ	Fully Automatic, 45 Amp Kubota 6 hp Air-Cooled Engine
Engine Fuel Tank	
E400A/E400AJJP/E400A Narrow	4 gal. (15.2 L)
E400AJJP Narrow/E450A/E450AJ	4 gal. (15.2 L)



JLG Industries, Inc.
 An Oshkosh Truck Corporation Company
 1 JLG Drive
 McConnellsburg, PA 17233-9533
 Telephone 717-485-5161
 Toll-free in US 877-JLG-LIFT
 Fax 717-485-6417
www.jlg.com