



CAME | GATE OPERATORS

FERNI

RESIDENTIAL COLUMN-MOUNT
SWING GATE OPERATOR



Versatile Solution for Residential Swing Gates



LiftMaster®, the industry leader in gate access systems in North America, has partnered with Italian manufacturer CAME Access Automation. The integration of LiftMaster's Security+ 2.0™ radio technology with CAME's sleek Italian design allows us to offer a complementary line of residential gate operators backed by our unmatched sales and service support.

The FERNI Residential Column-Mount Swing Gate Operator moves gates up to 13 feet wide. This unique system enables gate automation when the dimensions of a large pillar prevent any other operator from being installed.

The compact FERNI offers full-sized features:

LiftMaster® Security+ 2.0™ radio technology
2X the range of standard receivers

On-board receiver provides a single remote solution for gate and garage access

Compact articulating arm mounts neatly on column or fence post

Can be mounted at top, middle or bottom of gate

24V DC motor with soft stop moves a 13 ft. gate or 1,770 lbs.

Adjustable speed control moves gate with precision

Simple manual disconnect for emergency operation

Timer-to-Close automatically closes the gate after preset time

LiftMaster®



CAME | **GATE OPERATORS**

FERNI

RESIDENTIAL COLUMN-MOUNT SWING GATE OPERATOR

Specifications

Power: 120V AC, single phase

Motor power:
24V DC continuous duty

Accessory power output:
24V AC, 2 amps

Receiver: Security+ 2.0™, holds
50 transmitters, HomeLink®
compatible*

Surge suppression: On high
and low voltage inputs

Operator duty cycle rating:
25 cycles per day

Gate travel speed: 90-degree
opening adjustable in
12-45 seconds

Temperature specifications:
-4°F to 131°F (-20°C to 55°C)

Warranty: 3 years for residential
applications

*May require an external adapter depending on the make,
model and year of your vehicle.
Visit www.homelink.com for additional information.

Construction

Cover: UV-resistant plastic

Operator motor casing:
Aluminum

Shipping weight:
FERNI 1PKG: 48 lbs.
FERNI-S: 32 lbs.

ETL listed: Compliant with
UL-325 and CSA C22.2
No. 247 standards

IMPORTANT: To be compliant with UL-325
and industry safety guidelines, qualified
secondary entrapment devices such as
photo-eyes or sensing edges are required
to be installed with this gate operator.

Add to Your System



DIR10M: CAME thru-beam
photo-eyes, 32.8' sensing
distance, NC contact



DIRL: CAME extruded 16.5"
aluminum photo-eye mounting
post with base



DIRZ: CAME photo-eye
aluminum alloy impact cover



LD7LP: LiftMaster® low-power
loop detector



893MAX: LiftMaster® 3-button
Security+ 2.0™ remote control



890MAX: LiftMaster® 3-button
mini Security+ 2.0™ remote control




TAC1: LiftMaster® telephone
entry system




EL25: LiftMaster® telephone
entry system

Recommended Capacities

Swing Ratings

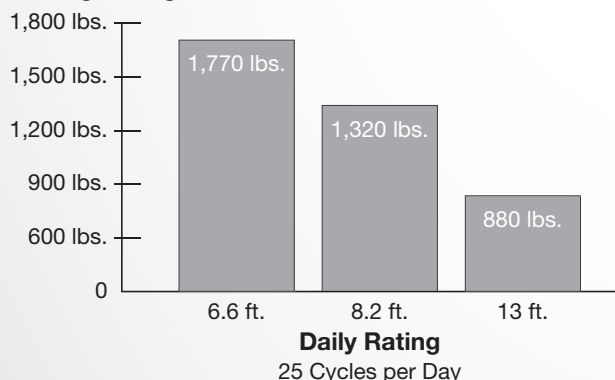

Dimensions

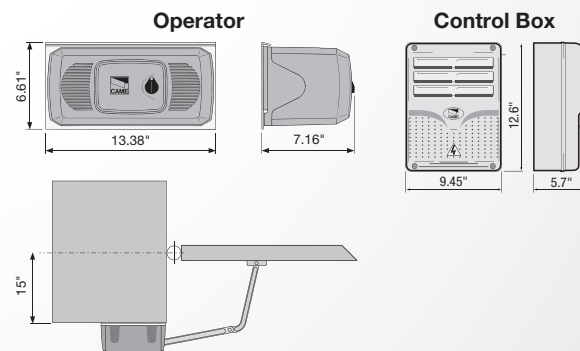

LiftMaster®

THE CHAMBERLAIN GROUP, INC.
845 Larch Avenue
Elmhurst, IL 60126
LiftMaster.com/CAME

LMCMCAFERN
Printed in U.S.A. 02/13
©2013 The Chamberlain Group, Inc.



YouTube

Follow us on Facebook, Twitter and YouTube!



The in-vehicle universal remote
control. See your automobile
dealer for availability.



I.C./F.C.C.
Certified