

# 450AJSII Articulating Boom Lift



## APPLICATIONS

- Facilities maintenance
- Electricians
- Plumbers
- All maintenance and construction work
- Factory fit outs before electrical power is connected

Proportional controller for lift and lower and boom swing give smooth control

One handed operation for operator comfort and control. Proportional drive controller gives smooth control

Jib boom and basket rotate allows additional functionality and access to hard to reach positions

Articulated boom function provides increased outreach at height and allows fast operation from ground to full height using upper boom lift and main boom, telescope and jib

Load Sensing System

Low maintenance steel platform with non-skid mesh floor, and side entry gate. Enclosed foot switch

Cylinder boots protect cylinder shafts from debris and contaminants

Perkins 4 cylinder water cooled diesel engine and transmission pump to match drive and function power and performance requirements with a quieter engine and lower operating cost

Tie down and lifting lugs for ease of transport

Front axle oscillates when travelling with counterweight over steer tyres, assists in accessing difficult sites

Urethane filled, puncture proof lug tyres

4 wheel drive with hydraulic piston 2 speed motors, gear reduction hubs and spring applied brakes for 4 wheel drive traction, provides maximum traction and ease of steering

# 450AJSII Articulating Boom Lift




## QUESTIONS TO ASK

- What are the ground conditions in the work area?
- What are the site conditions travelling around the site?
- What is the working height needed for the job?
- What is the up and over outreach required for the job?
- Do you need an extension lead outlet in the platform?
- Will an inbuilt Miller 5.5kVA generator make the job easier?

## KEY SELLING POINTS

- Smooth control, proportional hydraulic 4 wheel drive, with two speed ranges
- Proportional lift and swing controls at the platform
- Oscillating front steer axle with the boom within 10 degrees of centre, assists 4 wheel drive traction
- Tight steering turning circle
- No tail swing
- Jib boom and basket rotate
- Cylinder boots protect cylinder rods from overspray and contaminants
- Lug pattern urethane filled tyres
- Multi axis 4 degree level sensor
- Plug in JLG analyser at platform and base to indicate system functions for servicing and adjustment
- Perkins 404C-22, 4 cylinder 2.216 litre diesel engine. 50HP/37kW @ 2800rpm, reduces noise, vibration, emissions and runs at a slower speed to reduce fuel use

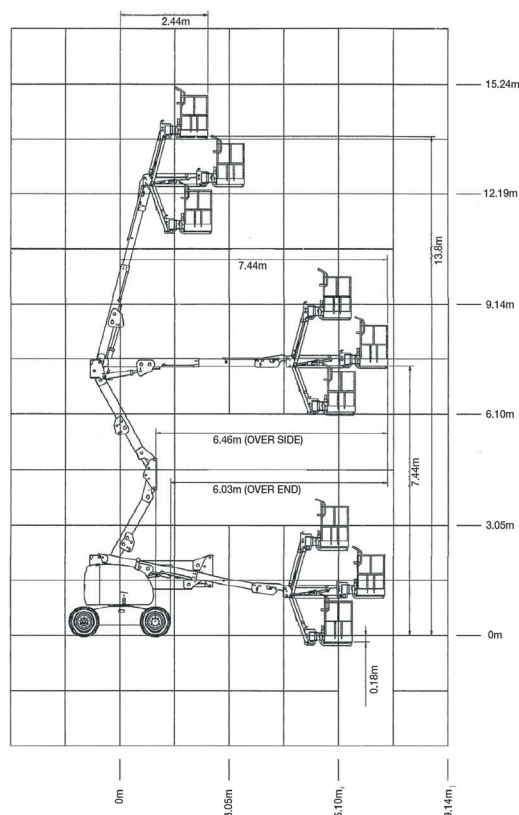

## SPECIFICATIONS

### Performance:

Platform Height (max.)	13.72m
Working Height	15.72m
Platform Rotation Angle	170°
Jib Raise Angle	75°
Jib Lower Angle	70°
Jib Articulation Range	145°
Maximum Horizontal Outreach	7.47m
Platform Capacity	230kg
Slewing Angle	360°
Continuous Slew	No

### Dimensions:

Stowed Length	6.53m
Stowed Height	2.30m
Overall Width	2.08m
Wheelbase	1.98m
Ground Clearance	0.36m
Platform Width	1.83m
Platform Length	0.76m
Overall Jib Length	1.24m
Tailswing	0m
Axle Oscillation	Std

### Power:

Power Source	Diesel
Engine Make	Perkins
Engine Model	404C-22
Engine Power	37kW
Genset	5.5kVA Miller
Auxiliary Power	12V Pump

### Travel:

Tyre Size	12 x 16.5
Tyre Type	Urethane Filled
Inside Turn Radius	1.73m
Outside Turn Radius	4.27m
Gradeability with 4WD	45%
Drive Speed - 4WD	7.2km/h
Maximum Ground Bearing Pressure	5.48kg/cm <sup>2</sup>

### Weights and Capabilities:

Fuel Tank Capacity	62.5 Ltr
Hydraulic Tank Capacity	113.6 Ltr
Operating Weight	7,430kg

Now operators can experience enhanced control panel protection for JLG® boom lifts with the SkyGuard® aftermarket accessory.\* Developed after extensive research and testing, the SkyGuard sensor, when activated by approximately 50 lb (23 kg) of force, stops all functions in use at the time.

The reverse functionality is the only feature of its kind in the market. After stopping the machine, it temporarily reverses, or “undoes,” most functions that were in use at the time of activation for less than a second’s worth of time. The control system automatically accesses the functions in use by the operator at the time of SkyGuard activation and—for a small period of time—is able to reverse that sequence, with the exception of certain functions.

\*Will be standard in some markets in July 2016.  
Will be standard in all markets by January 2017.

### Features

- Stops the function in use at the time of activation and sounds the audible alarm
- Flashing strobe is an additional option
- Temporarily reverses\*\* functions that were in use at the time of activation
- Break away feature for extreme conditions

\*\*Reversal possible for most, but not all, functions.

### Benefits

- SkyGuard can be activated from a variety of angles and does not reduce the work envelope of the boom lift
- Does not increase the platform profile or limit the use of the platform
- No movable parts means no need for scheduled or additional maintenance
- Resets by cycling foot switch or e-stop

### Available on these JLG Models:

Most JLG Boom Lifts manufactured after 2004



Operator moves towards obstruction.



Audible alarm sounds upon operator contact with the bar.



The auto reverse feature activates for most functions.

#### JLG Industries, Inc.

1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417

[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company

Part No.: 3131821  
R111707  
Printed in USA