


Florida approval update - as of 7-14-15

Plastro Cheat Sheet Instructions

- 1 - Look at the Florida wind map below. Where is the structure to be built - Non-impact (white area), Florida Impact (dark blue area plus purple coastal lines) or HVHZ (light blue cross hatched area)?
- 2 - What is the height of the door - 6/8 or 8/0?
- 3 - What is the layout - single door, single with sidelights, double door or double with sidelights?
- 4 - Do the movable door panels have glass or are they opaque?
- 5 - Apply the information above to the spreadsheet to determine which approval you need.
- 6 - Go to www.floridabuilding.org/pr_app_srch.aspx and plug in the number next to "FL". Enter your number and hit "Enter".
- 7 - Click on the blue number and hit "Enter". Scroll down to the list. Look under "Description" until you see the desired unit.
- 8 - Click on the blue "Installation Instructions". You will get a downloadable, printable PDF that can be given to the building department.

Florida 2012 Impact Requirements to meet the FBC 2010 code

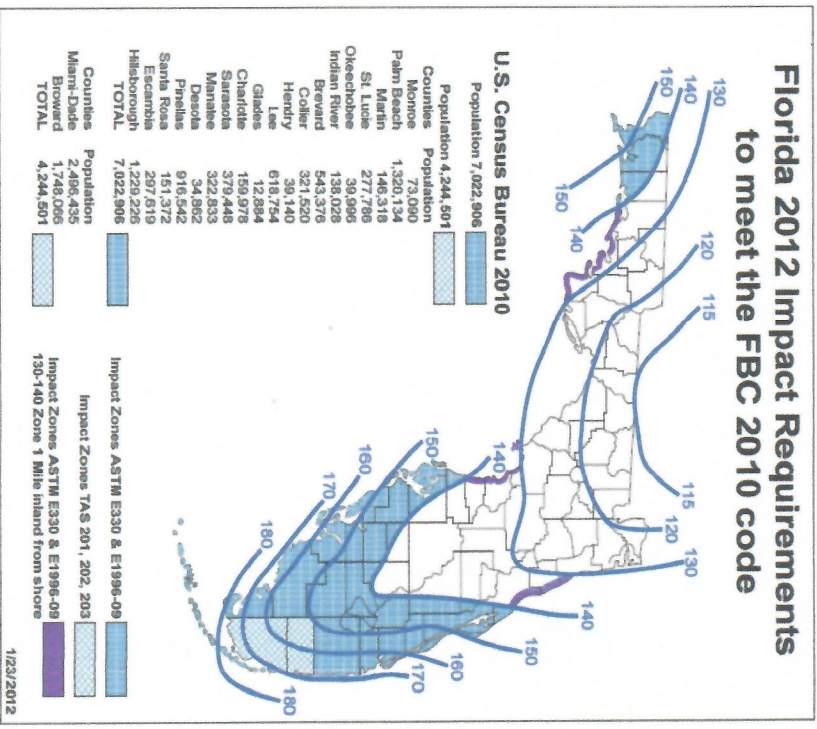



THIS DOCUMENT IS SUBJECT TO REVIEW AND CORRECTION. USE IT ONLY AS A GUIDE.

Summi

HEIGHT	IMPACT	HVHZ	TYPE	FL #	DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		NOTES
					OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	
6/8	No	No	All skins	15213.2 to .8									6, 15, 19
6/8	No	No	All skins	15213.9 to .13									4, 6, 15, 19
6/8	No	No	All skins	15213.14 to .18									4, 6A, 15
6/8	No	No	All skins	15220.1 to .10									8, 16
6/8	No	No	All skins	15221.1 & .6									4, 11
6/8	No	No	All skins	15221.3 & .8									4, 10, 15
6/8	No	No	All skins	15221.4, .5, .9 & .10									4, 7, 15
6/8	No	No	All skins	15221.2, .7									9, 10, 15
6/8	No	No	All skins	17947.1, .2, .10 & .11									1, 4, 6A, 16
6/8	No	No	All skins	15362.4 to .6									21
6/8	No	No	FI Glaze	15215.1 to .4									4, 6, 15, 17
6/8	No	No	FI Glaze	15215.5									4, 6, 16, 17
6/8	No	No	Thermable	15219.1									1
6/8	No	No	Thermable	15219.2									1
6/8	Yes	No	20 Min	15219.5 to .6									1
6/8	No	No	All skins	17184.26 to .29									1, 5, 8, 16
6/8	No	No	Ruete	15209.1 & .3									1, 7, 15
6/8	No	No	All skins	15220.11 to .15									8, 16
6/8	No	No	All skins	15213.20, .22, .25, .27									6, 15, 19
6/8	No	No	All skins	17184.34 to .37									1, 4, 5, 8, 16
6/8	No	No	All skins	15213.28 to .31									6, 15, 19
6/8	No	No	All skins	15213.21, .23, .26									4, 6, 15, 19
6/8	No	No	All skins	15213.32 to .37									4, 15
6/8	No	No	All skins	15213.38 & .39									4, 6
6/8	No	No	All skins	15213.40									4, 6A, 16
6/8	No	No	All skins	17347.3, .4, .11 & .12									1, 4, 6A, 16
6/8	No	No	FI Glaze	15215.6 to .9									4, 6, 15, 17
6/8	No	No	FI Glaze	15215.10									4, 6, 16, 17
6/8	Yes	No	20 Min	15219.7 to .8									1
3/6 X 6/0	No	No	All skins	15209.1 & .2									1, 8, 15
6/8	No	No	Transom	16224.1									68.5" x 1.7"
6/8	No	No	STEEL	15962.1 to .4									4, 16

NOTES:

- 1 - ADA sill option
- 2 - Outswing only
- 3 - Inswing only
- 4 - Door swing affects DP
- 5 - Multi-point lock option
- 6 - Back to back **WOOD** jamb

- 6A - Back to back wood or Plastpro jamb
- 7 - 1x between door & sidelite jambs
- 8 - 2x between door & sidelite jambs
- 9 - Transom option
- 10 - Plastpro mullion
- 11 - All Plastpro glass options including Speakeasy, DP is affected

- 15 - 14" max sidelite width
- 16 - 36" max sidelite width
- 17 - Includes Craftsman style doors
- 19 - Plastpro snap frame glass option
- 21 - Dunbarton Achiever one piece frame



THIS DOCUMENT IS SUBJECT TO REVIEW AND CORRECTION. USE IT ONLY AS A GUIDE.



Compiled by
Summer Marketing, Inc.

ITEMS IN THE SECTION BELOW MEET FLORIDA IMPACT REQUIREMENTS FOR ALL AREAS EXCEPT DADE & BROWARD COUNTIES

HEIGHT	IMPACT	HVHZ	TYPE	FL #	DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		DESIGN PRESSURE		NOTES
					OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	
6/8	Yes	No	All skins	17184.21 to 25	±65	±50	±55 & ±55 -60	±50	±55	±50	±50	1, 8, 16	
6/8	Yes	No	All skins	15187.1 to .3	±65 to +65 -70	±50	±50	±50	±55	±50	±50	1, 4, 7, 8, 15	
6/8	Yes	No	All skins	17184.11 to .15	+65 -70	±50	±50	±50	±50	±50	±50	4, 8, 16	
6/8	Yes	No	All skins	9231.1	±50	±50	±50	±50	±50	±50	±50	22	
6/8	Yes	No	All skins	15341.11	±50	±50	±50	±50	±50	±50	±50	1, 19	
6/8	Yes	No	All skins	15366.6	±50	±50	±50	±50	±50	±50	±50	1, 20	
6/8	Yes	No	All skins	17347.5, .6, .13 & .14	±60 to +60 -65	±50	±47	±35 to ±50	±47	±50	±50	1, 4, 6A, 16, 23	
6/8	Yes	No	Fl Glaze	15215.11 to .14	±50	±50	±50	±50	±50	±50	±50	6A, 16	
6/8	Yes	No	Fl Glaze	15215.15	±75	±60	±50	±50	±50	±50	±50	16	
6/8	Yes	No	Trimable	15219.3 & .4	±65	±50 to +50 -55	±50 to +50 -55	±50	±50	±50	±50	1	
6/8	Yes	No	20 Min	15219.5 to .6	±55 to ±60	±47.5 to ±50	±55 to +60 -65	±47.5 to ±50	±60	±50	±50	1, 5, 8, 16	
7/0	Yes	No	All skins	17184.30 to .33	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±50	±50	±50	8, 16	
8/0	Yes	No	All skins	17184.1 to .5	±55 to ±60	±47.5 to ±50	±55 to +60 -65	±47.5 to ±50	±60	±50	±50	1, 8, 15	
8/0	Yes	No	Rustic	15209.6 to .8	±45 to +45 -50	±50 to +50 -55	±45 to +45 -50	±40 to +45 -50	±42 to +42 -47.5	±47.5 to ±50	±47.5 to ±50	4, 8, 16	
8/0	Yes	No	All skins	16094.3 & .4	±65 to +65 -70	±50 to +50 -55	±50 to +50 -55	±50 to +50 -55	±45 to +45 -50	±50 to +50 -55	±50 to +50 -55	1, 4, 5	
8/0	Yes	No	All skins	17184.16 to .20	±55 to +55 -60	±45 to +45 -50	±45 to +45 -50	±45 to +45 -50	±45 to +45 -50	±45 to +45 -50	±45 to +45 -50	1, 4, 6A, 16, 23	
8/0	Yes	No	All skins	17184.38 to .41	±60 to +60 -65	±47.5 to ±50	±45 to +45 -50	±42 to +42 -47.5	±47.5 to ±50	±47.5 to ±50	±47.5 to ±50	4, 6, 15	
8/0	Yes	No	All skins	17347.7, .8, .15 & .16	±45 to +45 -50	±47.5 to ±50	±45 to +45 -50	±42 to +42 -47.5	±47.5 to ±50	±47.5 to ±50	±47.5 to ±50	6A, 16	
8/0	Yes	No	Fl Glaze	15215.16 to .19	±65	±60	±55	±50	±55	±50	±50	1	
8/0	Yes	No	Fl Glaze	15215.20	±60	±40	±55	±50	±55	±50	±50	1, 8, 15	
8/0	Yes	No	20 Min	15219.7 to .8	±55	±40	±55	±50	±55	±50	±50	2, 8, 15	
8/0	Yes	No	All skins	15209.4 & .5	±55	±40	±55	±50	±55	±50	±50	2, 6, 8, 15	
6/8	Yes	No	STEEL	15962.5 & .6	±55	±40	±55	±50	±55	±50	±50		
6/8	Yes	No	STEEL	15962.7	±55	±40	±55	±50	±55	±50	±50		
6/8	Yes	No	STEEL	15962.8	±55	±40	±55	±50	±55	±50	±50		

NOTES:

- 1 - ADA sill option
- 2 - Outswing only
- 4 - Door swing affects DP
- 5 - Multi-point lock option
- 6 - Back to back **WOOD** jamb
- 6A - Back to back Plastpro jamb

- 7 - 1x between door & sidelite jambs
- 8 - 2x between door & sidelite jambs
- 15 - 14" max sidelite width
- 16 - 36" max sidelite width
- 19 - Dunbarton Rediflex split frame
- 20 - Dunbarton Rediframe one-piece frame



HVHZ IMPACT & NON-IMPACT PAGE

2010 CODE COMPLIANCE LIST FOR PLASTPRO DOORS

THIS DOCUMENT IS SUBJECT TO REVIEW AND CORRECTION. USE IT ONLY AS A GUIDE.

ITEMS IN THE SECTION BELOW MEET FLORIDA IMPACT REQUIREMENTS FOR DADE & BROWARD COUNTIES (HVHZ)



HEIGHT	IMPACT	HVHZ	TYPE	FL #	DESIGN PRESSURE SINGLE		DESIGN PRESSURE DOUBLE		DESIGN PRESSURE SINGLE W/ SL		DESIGN PRESSURE DOUBLE W/ SL		NOTES	
					OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED	OPAQUE	GLAZED		
6/8	Yes	Yes	All skins	15180.1 to .5		±50		±50		±50		±50		2, 8, 12, 16
6/8	Yes	Yes	All skins	15180.11 to .15	±47.5 to ±50	±50	±47.5 to ±50	±50	±47.5 to ±50	±50	±50	±50	±50	4, 8, 12, 16
6/8	Yes	Yes	All skins	15210.1 to .6	±50 & ±75	±50 to ±75	±50 to ±60	±50 to ±75	±50 to ±75	±50	±50	±50	±50	1, 5, 8, 16
6/8	Yes	Yes	Fl Glaze	12-0612.02						±50	±50	±50	±50	2, 8, 15, 20, 21
6/8	Yes	Yes	Fl Glaze	12-0612.09						±50	±50	±50	±50	8, 15, 20, 21, 23
6/8	No	Yes	All skins	15180.21 to .23						±50	±50	±50	±50	2, 8, 11, 16
6/8	No	Yes	All Std Doors	15220.1 to .10	±50	±50	±50	±50	±50	±50	±50	±50	±50	8, 13, 14, 16
8/0	Yes	Yes	Sm & Tend	15180.16 to .20	±47.5 to ±50	±50	±47.5 to ±50	±50	±50	±50	±50	±50	±50	2, 4, 8, 16
8/0	Yes	Yes	All skins	15210.7 to .14	±60 to ±90	±50 to ±65	±65 to ±90	±50 to ±65	±60	±50 to ±65	±50	±50	±50	2, 8, 12, 13, 16
8/0	Yes	Yes	Flush Glaze	12-0612.13										15, 20, 22
8/0	No	Yes	All skins	15180.24 to .26						±50	±50	±50	±50	2, 8, 11, 16
8/0	No	Yes	All Std Doors	15220.11 to .15		±47		±47					±47	8, 13, 14, 16
6/8	Yes	No	STEEL	15962.5 & .6	±55	±40	±55	±40	±55	±40	±55	±40		2, 8, 15
6/8	Yes	No	STEEL	15962.7 & .8	±55	±40	±55	±40	±55	±40	±55	±40		2, 8, 15

NOTES:

- 1 - ADA sill option
- 2 - Outswing only
- 3 - Inswing only
- 4 - Door swing affects DP
- 5 - Multi-point lock option
- 8 - 2x between door & sidelite jambs
- 11 - HVHZ door with non-impact glass. Glass must be protected.
- 12 - Surface bolts affect DP rating
- 13 - Outswing meets water infiltration requirements for HVHZ
- 14 - Standard non-HVHZ door. Must be completely protected.
- 15 - 14" max sidelite width
- 16 - 36" max sidelite width
- 20 - This is a Dade NOA
- 21 - Endura Fatboy mull
- 22 - Nan Ya 5/8" aluminum mullion reinforcement
- 23 - Inswing only