

ICI 7320 P Series



ICI 7320 Professional Series Radiometric Camera

Detector:	Microbolometer 320 x 240 UFPA VOX
Field of View:	18° with standard 25mm lens
Instantaneous Field of View:	Lens dependent
Spectral Response:	7 to 14 μm
Video Update Rate:	50-60 Hz (14 bit digital)
Focusing Distance:	4" to infinity
Focus Adjustment:	Manual / Electronic focus available
Temperature Dynamic Range:	16 Bits
Accuracy :	$\pm 1^\circ\text{C}$ or $\pm 1\%$
Thermal Sensitivity:	<27 mk
Operating Temperature:	-20° C to 50° C
Storage Temperature:	-40° C to 70° C
Environmental Protection:	IP54
Shock:	30g
Vibration:	3g
Palettes:	8 palettes including color and B&W

InfraredCamerasInc.com
 (866) 861-0788
 (409) 861-0788



Includes IR Flash Professional Thermal Imaging Software.
 Optional application software:
 DLL's-Labview & C++
 Optional SDK available


Optional Lenses Available

5mm	87° FOV
10mm	46° FOV
18mm	25° FOV
25mm	18° FOV
50mm	11° FOV
75mm	7.3° FOV
100mm	5.5° FOV
150mm	3.7° FOV

Automatic or Manual Gain and Level
 1 watt input powered by computer USB connection
 Weight: 5.2 oz (148g) w/ lens
 Dimensions: 2.1" x 3.2" x 0.5" (53mm x 81mm x 13mm)
 Data Interface: USB2
 Outputs: USB2



ICI 7320 shown with optional 35 Micron Microscopic Lens

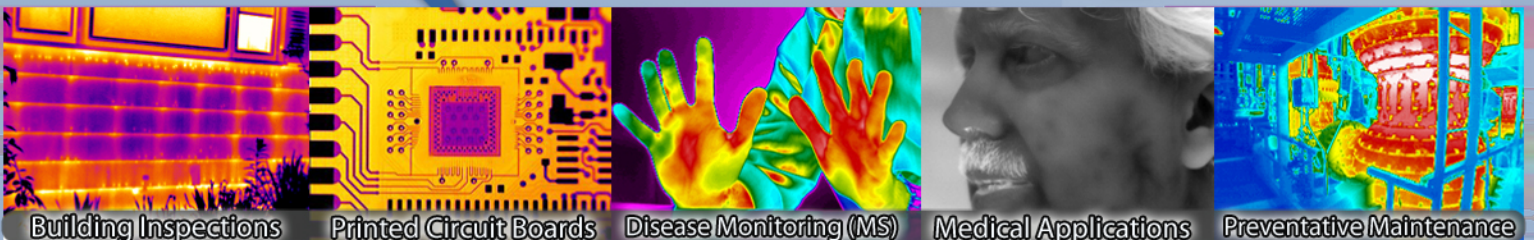

Building Inspections Printed Circuit Boards Disease Monitoring (MS) Medical Applications Preventative Maintenance