

Avanale offer a range of quality GF & E&H meters/equipment, in addition we have a quality range of Martin & AVRO branded meters and controllers

**Conductivity Monitors
Conductivity Controllers
Resistivity Monitors
Resistivity Controllers
pH Controller
ORP Controller
Reverses Osmosis Controller
UF Controller
Handheld TDS/conductivity meter
Handheld pH meter
Dual TDS meter**

If you can not see what you are after, please contact us

phil@avanale.com.au

MT-CM-230 Conductivity Monitor

Features:

- On-line panel mount conductivity monitor
- Display in μS and mS
- Automatic temperature compensation

Technical Parameter:

Sensor input range:	0~20, 0~200, 0~2000 $\mu\text{S}/\text{cm}$ 0~20 mS/cm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C
Electrode:	1.0 cm^{-1} plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\%$ RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In

Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalination monitor
- Water quality monitor



AVRO I460 Conductivity Monitor – Standard supply on smaller AVRO RO Units

Features:

- On-line panel mount conductivity monitor
- Display in μS
- Automatic temperature compensation

Technical Parameter:

Sensor input range:	0~2000 $\mu\text{S}/\text{cm}$
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C
Electrode:	1.0 cm^{-1} plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\%$ RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm

Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalinization monitor
- Water quality monitor

MT-TDS-230 Conductivity Monitor

Features:

- On-line panel mount conductivity monitor
- Display in ppm
- Automatic temperature compensation

Technical Parameter:

Sensor input range:	0~20, 0~200, 0~2000 ppm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C
Electrode:	1.0 cm^{-1} plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\%$ RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm



Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalination monitor
- Water quality monitor

MT-EC-450 Conductivity Controller

Features:

- On-line panel mount conductivity controller
- Display in μS , ppm and mS
- Simulate Function, Isolated 4-20mA current output
- Relay control output. Hi, On, Off.
- Automatic programmable temperature compensation
- Display and/or Control: μS , mS, ppm or $^{\circ}\text{C}$



Technical Parameter:

Sensor input range:	0~20, 0~200, 0~2000 $\mu\text{S}/\text{cm}$ 0~20, 0~200, 0~2000ppm 0~20mS/cm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic programmable compensation standard Temperature: 25 $^{\circ}\text{C}$
Electrode:	1.0cm ⁻¹ plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Current output:	Isolated 4-20mA current output
Control output:	Relay output, Hi, on, off
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50 $^{\circ}\text{C}$; Humidity: $\leq 85\%$ RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control
- Cooling water control
- Industrial water process control
- Desalination monitor
- Water quality monitor

MT-CM-5230 Conductivity Controller

Features:

- On-line panel mount conductivity monitor
- Display in μS , ppm and mS
- Simulate Function, Isolated 4-20mA current output
- Automatic programmable temperature compensation
- Display and/or Control: μS , mS, ppm or $^{\circ}\text{C}$

Technical Parameter:

Sensor input range:	0~20, 0~200, 0~2000 $\mu\text{S}/\text{cm}$ 0~20, 0~200, 0~2000ppm 0~20mS/cm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic programmable compensation standard Temperature: 25 $^{\circ}\text{C}$
Electrode:	1.0cm ⁻¹ plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Current output:	Isolated 4-20mA current output
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50 $^{\circ}\text{C}$; Humidity: $\leq 85\%$ RH
Dimensions:	96 x 96 x 130mm (height x width x depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In



Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water Process monitor
- Desalination monitor
- Water quality monitor

MT-CM-5630 Conductivity Controller

Features:

- On-line panel mount conductivity controller
- Display in μS , ppm and mS
- Simulate Function, Isolated 4-20mA current output
- Relay control output. Hi, Lo, On, Off
- Automatic programmable temperature compensation
- Display and/or Control: μS , mS, ppm or $^{\circ}\text{C}$

Technical Parameter:

Sensor input range:	0~20, 0~200, 0~2000 $\mu\text{S}/\text{cm}$ 0~20, 0~200, 0~2000ppm 0~20mS/cm
---------------------	------------------------------------------------------------------------------------



	Accuracy: 1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic programmable compensation standard Temperature: 25°C
Electrode:	1.0cm ⁻¹ plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Current output:	Isolated 4-20mA current output
Control output:	Relay output, Hi, Lo, on, off
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\%$ RH
Dimensions:	96 x 96 x 130mm (height x width x depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control
- Cooling water control
- Industrial water process control
- Desalination monitor
- Water quality monitor

MT-RM-220 Resistivity Monitor

Features:

- On-line panel mount resistivity monitor.
- Display in MΩ.
- Simulate Function, Non-isolated 4-20mA current output
- Automatic temperature compensation

Technical Parameter:

Sensor input range:	0 ~ 18.2MΩ. cm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C
Electrode:	0.05cm ⁻¹ sanitary grade stainless steel 316L electrode , 1/2" thread
Cable length:	10m or others(5~30m)
Current output:	Non-isolated 4-20mA current output
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\%$ RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In



Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor

- Desalination monitor
- Water quality monitor

MT-RM-430 Resistivity Monitor

Features:

- On-line panel mount resistivity monitor.
- Display in MΩ
- Relay control output, Lo, on, off
- Automatic temperature compensation



Technical Parameter:

Sensor input range:	0 ~ 18.2MΩ . cm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C
Electrode:	0.05cm ⁻¹ sanitary grade stainless steel 316L electrode , 1/2" thread
Cable length:	10m or others(5~30m)
Control output:	Relay output, Lo, on, off
Power supply:	AC 220V $\pm 10\%$ 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\%$ RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In

Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalination monitor
- Water quality monitor

MT-RM-5220 Resistivity Controller

Features:

- On-line panel mount resistivity monitor.
- Display in MΩ
- Simulate Function, Isolated 4-20mA current output
- Automatic temperature compensation

Technical Parameter:

Sensor input range:	0 ~ 18.2MΩ .cm
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C



Electrode: 0.05cm⁻¹ sanitary grade stainless steel 316L electrode , 1/2"

thread

Cable length: 10m or others(5~30m)
 Current output: Isolated 4-20mA current output
 Power supply: AC 220V ±10% 50Hz
 Environmental conditions: Temperature: 0~50°C ; Humidity: ≤85%RH
 Dimensions: 96 × 96 ×130mm (height × width × depth)
 Panel cut-out 92X92mm
 Installation Cut-out Fit-In

Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalination monitor
- Water quality monitor

MT-RM-5620 Resistivity Controller

Features:

- On-line panel mount resistivity monitor.
- Display in MΩ
- Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, on, off
- Automatic temperature compensation

Technical Parameter:

Sensor input range: 0 ~ 18.2MΩ .cm
 Accuracy: 1.5% (FS)
 Stability: ±2 × 10⁻³ (FS) / 24h
 Display: Back light 3.5-bit LCD
 Temperature comp.: Automatic thermistor temp compensation, standard temperature: 25°C
 Electrode: 0.05 cm⁻¹ sanitary grade stainless steel 316L electrode , 1/2" thread
 Cable length: 10m or others(5~30m)
 Current output: Isolated 4-20mA current output
 Control output: Relay control output, Hi, Lo, on, off
 Power supply: AC 220V ±10% 50Hz
 Environmental conditions: Temperature: 0~50°C ; Humidity: ≤85%RH
 Dimensions: 96 × 96 ×130mm (height × width × depth)
 Panel cut-out 92X92mm
 Installation Cut-out Fit-In




Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalination monitor
- Water quality monitor

MT-CRC-8850 Conductivity/Resistivity Controller

Features:

- On-line panel mount conductivity or resistivity controller
- Display in μS , ppm (TDS) and $\text{mS M}\Omega$
- Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, pulse, off
- Automatic programmable temperature compensation
- Dual output option allows temperature and process signal transmission
- 2X16 character dot matrix LCD
- NEMA 4X/IP65 enclosure with self-healing window
- Meets USP requirements
- Used for conductance, resistance, or TDS signal transmission and display

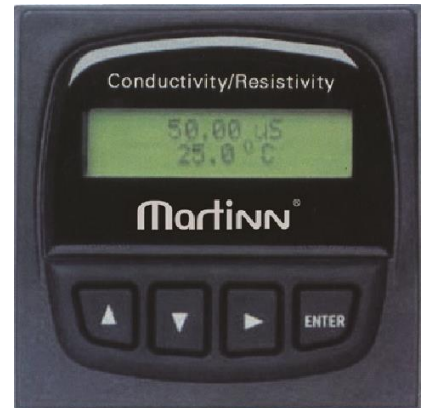

Technical Parameter:

Sensor input range:	Conductivity: 0.055 ~ 400000 $\mu\text{S/cm}$ Resistivity: 0 ~ 18.2 $\text{M}\Omega \cdot \text{cm}$ TDS: 0.023 ~ 200000 ppm
Accuracy:	1.0% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Back light 2X16 character dot matrix LCD
Temperature comp.:	Automatic thermistor temp compensation, standard temperature: 25°C (PT1000, -25°C ~ 120°C)
Current output:	Isolated 4-20mA current output, fully adjustable and reversible
Relay output:	Mechanical SPDT contacts:., Hi, Lo, Pulse, Of Max 400 pulses/min
Open-collector output:	Hi, Lo, Pulse, Off Max 400 pulses/min
Communication Output:	RS-485 serial port
Power supply:	DC 18~36V
Environmental conditions:	Temperature: 0~50°C ; Humidity: $\leq 85\% \text{RH}$
Dimensions:	96 x 96 x 45mm (height x width x depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In

Application:

- RO/DI system monitor
- Cooling water monitor
- Industrial water process monitor
- Desalinization monitor
- Water quality monitor
- Environmental study (TDS)
- Leak detection
- Chemical concentration

MT-pH-850 pH Controller

Features:

- On-line panel mount pH controller.
- Display in pH
- Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, on
- Automatic temperature compensation



Technical Parameter:

Sensor input range:	0.00 ~ 14.00pH
Resolution:	0.02pH
Accuracy:	+/- 0.1pH
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic MTC temp compensation 0 ~ 80°C
Calibration:	Automatic 3 point calibration
Electrode:	Plastic-shell dual combination electrode , 3/4" thread
Cable length:	10m or others(5~30m)
Current output:	Isolated 4-20mA current output
Control output:	Relay control output, Hi, Lo, on
Power supply:	AC 220V ±10% 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: ≤85%RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control
- Cooling water control
- Industrial water process control
- Waste water control
- Desalinization monitor
- Water quality monitor

MT-ORP-860 ORP Controller

Features:

- On-line panel mount pH controller.
- Display in mV
- Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, on



Technical Parameter:

Sensor input range:	-999 ~ 999mV
Accuracy:	+/-2mV
Display:	Back light 3.5-bit LCD
Electrode:	Plastic-shell dual combination electrode , 3/4" thread

	Cable length:
10m or others(5~30m)	
Current output:	Isolated 4-20mA current output
Control output:	Relay control output, Hi, Lo, on
Power supply:	AC 220V \pm 10% 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: \leq 85%RH
Dimensions:	48 x 96 x100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control
- Cooling water control
- Industrial water process control
- Waste water control
- Desalinization monitor
- Water quality monitor

MT-pH/ORP-2310 ORP Controller

Features:

- On-line panel mount pH/ORP controller.
- Display in pH,mV
- Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, on, off
- Automatic temperature compensation
- Display and/or Control: pH or ORP



Technical Parameter:

Sensor input range:	pH: 0.00 ~ 14.00pH
	ORP: -999 ~ 999mV
Accuracy:	pH: +/- 0.1pH
	ORP: +/-2mV
Display:	Back light 3.5-bit LCD
Temperature comp.:	Automatic MTC temp compensation 0 ~ 60°C
Calibration:	Automatic 3 point calibration
Electrode:	Plastic-shell dual combination electrode , 3/4" thread
Cable length:	10m or others(5~30m)
Current output:	Isolated 4-20mA current output
Control output:	Relay control output, Hi, Lo, on, off
Power supply:	AC 220V \pm 10% 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: \leq 85%RH
Dimensions:	96 x 96 x130mm (height x width x depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control

● Industrial water process control

- Pool and spa control
- Waste water control
- Desalination monitor
- Water quality monitor
- Disinfecting

MT-pH/ORP-2800 ORP Controller

Features:

- On-line panel mount pH/ORP controller.
- Display in pH,mV
- Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, on, off
- Automatic temperature compensation
- Display and /or Control :pH and ORP simultaneously

Technical Parameter:

Sensor input range:	pH: -2.00 ~ 16.00pH
	ORP: -2000 ~ +2000mV
Resolution:	pH: 0.01pH
	ORP: 1 mV
Accuracy:	pH: +/- 0.02pH
	ORP: +/- 4mV
Temperature comp.:	PT100,10°C~130°C (MTC,ATC)
Calibration:	Automatic 3 point calibration
Electrode:	Plastic-shell dual combination electrode , 3/4" thread
	Plastic-shell triple combination electrode , 3/4" thread (Pt100)
Cable length:	10m or others(5~30m)
Current output:	Isolated 4-20mA current output
Control output:	Relay control output, Hi, Lo, on, off
Power supply:	AC 220V ±10% 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: ≤85%RH
Dimensions:	96 × 96 ×130mm (height × width × depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In

Application:


- RO/DI system control
- Cooling water control
- Industrial water process control
- Pool and spa control
- Waste water control
- Desalination monitor
- Water quality monitor
- Disinfecting



MT-pH/ORP-8750 ORP Controller

Features:

- On-line panel mount pH and ORP controller
- Display in °C
- Hold and Simulate Function, Isolated 4-20mA current output
- Relay control output, Hi, Lo, pulse, off
- Automatic temperature compensation (PH)
- Output scalability
- Dual output option allows temperature and pH signal transmission
- 2X16 character dot matrix LCD
- NEMA 4X/IP65 enclosure with self-healing window
- Meets USP requirements
- Used for pH or ORP signal transmission and display

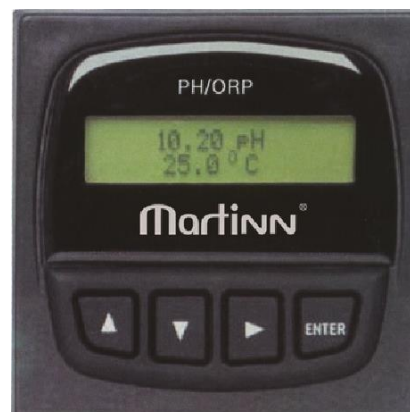

Technical Parameter:

Sensor input range:	pH: 0.00 ~ 14.00pH ORP: -2000 ~ +2000mV
Accuracy:	pH: 0.01pH ORP: 1 mV
Display:	Back light 2X16 character dot matrix LCD
Temperature comp.:	Automatic temp compensation PT1000, -25°C ~ 120°C (MTC, ATC)
Current output:	Isolated 4-20mA current output, fully adjustable and reversible Relay
output:	Mechanical SPDT contacts:, Hi, Lo, Pulse, Of Max 400 pulses/min
Open-collector output:	Hi, Lo, Pulse, Off Max 400 pulses/min
Communication Output:	RS-485 serial port
Power supply:	DC 18~36V
Environmental conditions:	Temperature: 0~50°C ; Humidity: ≤85%RH
Dimensions:	96 × 96 ×45mm (height × width × depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In

Application:

- Neutralization systems
- Heavy metals recovery
- Plating control
- Industrial water process monitor
- Pool and spa control
- Desalination monitor
- Water quality monitor
- Environmental study
- Waste water control
- Disinfecting

MT-ROE-2200 Reverse Osmosis Controller

Features:

- Panel mount reverse osmosis controller
- RO collecting: water shortage, raw water low pressure, high pressure, product water tank high level.
- RO controlling: raw water pump overload, high pressure pump overload, inlet valve, auto-flush valve
- Simulate Function, Isolated 4-20mA current output
- Relay control output. On
- Automatic temperature compensation



Technical Parameter:

Current output:	Isolated 4-20mA current output
Control output:	Relay output, on
Power supply:	AC 220V ±10% 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: ≤85%RH
Dimensions:	48 x 96 x 100mm (height x width x depth)
Panel cut-out	45X91mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control
- Industrial water process control
- Desalinization control

ROC – 8221 RO Controller

Features:

- Panel mount reverse osmosis controller with on-line conductivity and temperature monitor
- RO collecting: water shortage, raw water low pressure, high pressure, product water tank high level.
- RO controlling: raw water pump, high pressure pump, RO high pressure, inlet valve, auto-flush valve, membrane flush, sleep,
- Simulate Function, Isolated 4-20mA current output
- Automatic temperature compensation
- Display and/or Control: μS and $^{\circ}\text{C}$




Application:

- RO/DI system control
- Industrial water process control
- Desalinisation control

AVRO46210 RO Controller as used on the smaller AVRO RO units

Features:

- Panel mount reverse osmosis controller with on-line conductivity monitor. $\mu\text{S}/\text{cm}$ or TDS
- RO low feed tank, low feed pressure, high pressure, product water tank high level.
- RO controlling: raw water pump, high pressure pump, RO high pressure, inlet valve, auto-flush valve, membrane flush, sleep,
- Allows level switches in feed and permeate tanks
- Pre-treatment interlock
- Automatic temperature compensation
- High permeate quality alarm
- LED on schematic indicates component operation

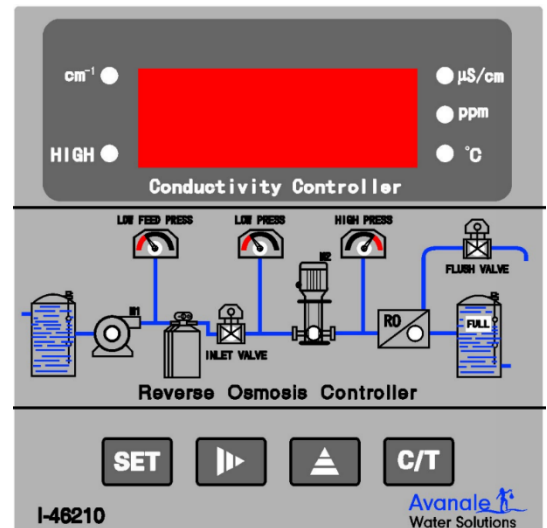

Application:

- RO/DI system control
- Industrial water process control
- Desalination control

MT-ROE-2230 Reverse Osmosis Controller

Features:

- Panel mount reverse osmosis controller with on-line conductivity and temperature monitor
- RO collecting: water shortage, raw water low pressure, high pressure, product water tank high level.
- RO controlling: raw water pump, high pressure pump, RO high pressure, inlet valve, auto-flush valve, membrane flush, sleep,
- Simulate Function, Isolated 4-20mA current output
- Relay control output. On
- Automatic temperature compensation
- Display and/or Control: μS and $^{\circ}\text{C}$



Technical Parameter:

Sensor input range:	Conductivity: 0~20, 0~200, 0~2000 $\mu\text{S}/\text{cm}$ Temperature: 0 ~ 50 $^{\circ}\text{C}$
Accuracy:	1.5% (FS)
Stability:	$\pm 2 \times 10^{-3}$ (FS) / 24h
Display:	Conductivity: 4 digit LCD Temperature: 3

digit LCD

Temperature comp.:	Automatic compensation standard Temperature: 25°C
Media Temperature:	5 ~ 50°C
Electrode:	1.0cm ⁻¹ plastic platinum gold electrode , 1/2" thread
Cable length:	5m or others(5~30m)
Current output:	Isolated 4-20mA current output
Control output:	Relay output, on
Power supply:	AC 220V ±10% 50Hz
Environmental conditions:	Temperature: 0~50°C ; Humidity: ≤85%RH
Dimensions:	96 × 96 ×130mm (height × width × depth)
Panel cut-out	92X92mm
Installation	Cut-out Fit-In

Application:

- RO/DI system control
- Industrial water process control
- Desalination control

MT-UF-4060 UF Controller

Features:

- Panel mount UF controller
- UF controlling: Service, Forward Flushing, Back Washing
- Relay control output. On
- Friendly Interface Designing

Technical Parameter:

Power voltage:	AC 220V±15% 50Hz
Temperature:	0 ~ 50°C;
Humidity:	≤85%RH
Load capacity of output contact:	5A/250V AC
	The magnetic valve should be driven through intermediate relay
Medium temperature:	5 ~ 50°C
Display mode:	3 1/2-digit LCD digital display
Outline dimensions:	96×96×110mm (height×width×depth)
Meter board hole:	92×92mm (height×width)
Installation	Cut-out Fit-In



Application:

- UF system control
- Residential water process control

TDS-3D TDS Meter

Hand Held
 3 Digit Display: 000-999 ppm
 Accuracy: $\pm 2\%$ F.S.
 Operating Temp: 0-50°C Automatic temp. compensation
 Battery Life: 1000 hours, 2x1.5V button cell
 Size: 15.5*3.1*2.3cm
 Weight: 76.5g(2.7oz)
 Comes with Clip-On Protective pouch

TDS-4D TDS Meter

4 Digit Display: 0000-5000 ppm
 Accuracy: $\pm 2\%$ F.S.
 Operating Temp: 0-80°C Automatic temp. compensation
 Battery Life: 1000 hours, 3 V CR2032 button cell
 Size: 15 x 2.8x 1.3cm
 Weight: 42.5 g (1.5 oz)
 Comes with Clip-On Protective pouch



TDS-3D-TEMP TDS & Temp Meter

3 Digit Display TDS: 000-999 ppm
 Temperature: 0 ~ 50°C
 Accuracy: $\pm 2\%$ F.S.
 Operating Temp: 0-80°C Automatic temp. compensation
 Battery Life: 1000 hours, 4x1.4V Mercury 675H or Equivalent
 Size: 15.5*3.1*2.3cm
 Weight: 76.5g(2.7oz)
 Comes with Clip-On Protective pouch



MT-DM-1 Dual TDS Meter

On-line dual TDS meter

3 Digit Display: 000-999 ppm

Accuracy: ±2% F.S.

Operating Temp: 0-50°C Automatic temp. compensation

Battery : button cell 1.5V * 2

Size: 7.6*2*4.7CM

Weight: 79.4g



MT-DM-2 Dual TDS Meter

On-line dual TDS meter

3 Digit Display: 000-999 ppm

Accuracy: ±2% F.S.

Operating Temp: 0-50°C Automatic temp. compensation

Battery : 5A (1.5V)*2

Size: 11.6*6.8*1.8CM

Weight: 201.3g



MT-PH-200 PH Meter

Range: 0.00 ~ 9.99, 10.0 ~ 14.00pH

Resolution: 0.01pH

Accuracy: +/- 0.02pH

Display: Back light large LCD

Temperature comp.: Automatic temp compensation 0 ~ 80°C

Calibration: Automatic 3 point calibration

Operating Temp: 0~80°C

Battery: button cell 1.5V*3

Battery life: 1000 hours

Size: 18.5x3.4x3.4cm

Weight: 95g (3.4oz)



MT-COM-100 TDS/Conductivity/Temp Meter

Range:	0~99.9, 100~999, 1000~9990 μ S/cm 0~99.9, 100~999, 1000~9990ppm
Resolution:	0.1us, 1us, 10us 0.1ppm, 1ppm, 10ppm
Accuracy:	2% (FS)
Transfer coefficients:	Non-linearity, including KCl, NaCl, 442, chosen by user.
Proofread:	Manual proofread.
Temperature comp.:	Automatic compensation standard Temperature: 25°C
Water Proof:	IP67
Battery:	button cell 1.5V*3
Size:	18.5*3.4*3.4cm
Weight:	90.7g

