



Grade 2 Cylindrical Knobset

ANSI Grade 2 EA & EI Series


LIFETIME WARRANTY




Conforms with BHMA/ANSI A156.2 Series 4000, Grade-2. Exceeds 400,000 Cycles. Meets A117.1 Accessibility Code.

EA Series BA KNOB

Shown in Brushed Stainless Steel (US32D)

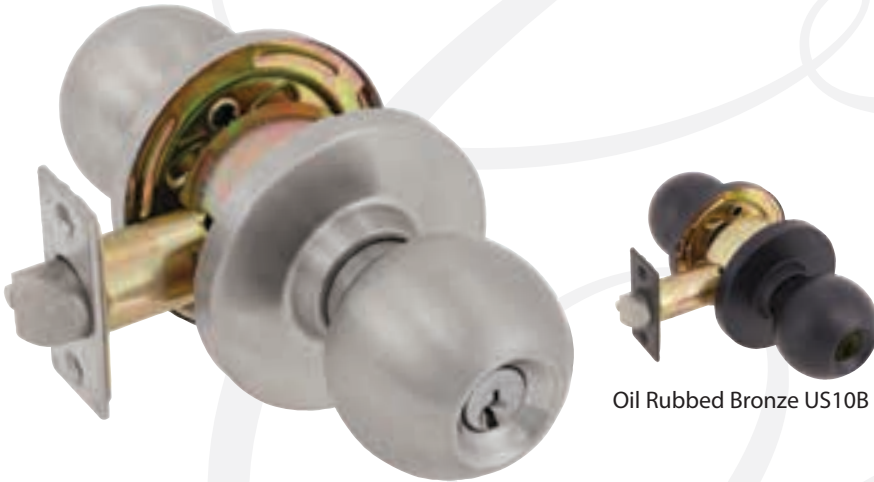

Oil Rubbed Bronze US10B


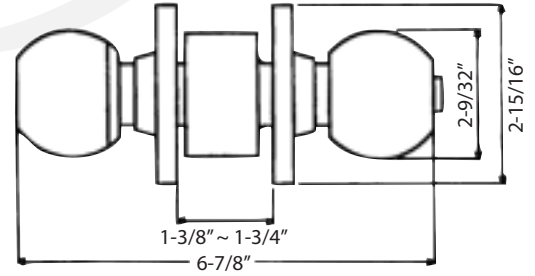


EI Series BA KNOB

Brushed Stainless Steel (US32D)



(SFIC) Interchangeable Core Available

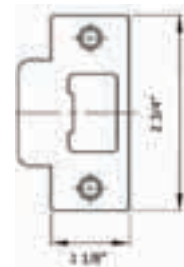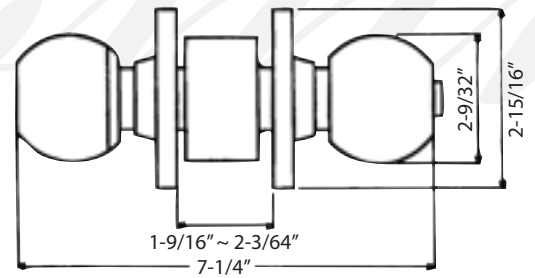

CODE: 9101
FUNCTION: T Strike Standard

PRODUCT FEATURES

- Concealed Mounting Screws.
- Fast and Easy Installation.
- Non Handed.
- Panic Proof (inside always free).

FINISHES AVAILABLE

BHMA SYMBOL	US CODE	DESCRIPTION
613	10B	Oil Rubbed Bronze (EA only)
605	3	Polished Brass (EA only)
630	32D	Brushed Stainless

PRODUCT SPECIFICATIONS

APPLICATIONS: For offices, schools, hospitals, apartments, hotel/motels, and other public buildings.

DOOR THICKNESS: 1-3/8" ~ 2" door thickness (35~51 mm).

BACKSET: 2-3/4" or 2-3/8", 3-3/4" or 5" optional.

STRIKE: 2-3/4" T-Strike standard. Strike box included. ANSI strike available.

LATCHBOLT: 1/2" throw stainless steel latch bolt (12.7 mm) RH or LH applications. Meets UL 3-Hour fire rating. UL File No. R13776. Faceplate Dimensions: 2-3/8", 1" x 2-1/4", 2-3/4", 1-1/8" x 2-1/4"

EXPOSED TRIM: Wrought brass.

KEYING: Schlage C 6-Pin Keyway. KWI available. Custom keying available upon request.

INTERCHANGEABLE CORE: Optional small-format 6-Pin or 7-Pin available.

ANSI & FEDERAL STANDARDS: Meets & exceeds requirement of BHMA/ANSI A156.2 Series 4000, Grade-1, 400,000 Cycles. Meets FF-H-106C Federal Standard.