


# Farm King

## PRODUCT GUIDE

Grain Handling | Tillage | Application Equipment | Hay Tools | Landscaping | Allied by Farm King



# Farm King

## Products for Every Farm

### Product Guide

Farm King started from humble beginnings in the 1930's, expanding over the decades through steady and measured growth and strategic acquisitions. Once associated only with grain augers, Farm King now manufactures one of the most diverse product portfolios in the agriculture industry, offering equipment that is used on nearly every farm around the world. Manufacturing facilities in Canada, including Manitoba and Alberta, and factories in North Dakota and Minnesota in the USA, are responsible for producing the majority of Farm King products, built to internationally recognized quality standards. With distribution locations throughout North America and a network of more than 1000 dealers, Farm King is poised for additional growth and product line expansion.

# Grain Handling

Farm King grain handling equipment is backed by decades of experience on farms around the world. As one of the first companies to produce a Backsaver Auger more than 30 years ago, peak structural integrity has been achieved and the overall product line has evolved to meet the high capacity needs of modern agricultural operations.



**CX Auger 8 / 10** - Features several enhancements to serviceability and stability as well as an expanded list of options. These updates ensure a smooth operating auger while requiring less power. Double intake fighting improves longevity and increases the intake area providing higher capacities to meet your grain moving on-farm demands.

MODEL	CX841	CX851	CX861	CX1041	CX1051	CX1061
Tube diameter, in	8			10		
Tube length, feet	41	51	61	41	51	61
Gasoline hp (3450 rpm)	16	20	24	28	32	38
Electric hp (1725 rpm)	8	10	15	10	15	20



**Backsaver Auger 10 / 13** - Farm King backsaver augers are practical, economical and dependable. That dependability has been a benchmark of Farm King backsaver augers for many decades. Available in tube widths of 10" and 13" and lengths from 50' to 114'.

MODEL	1050	1060	1070	1080	1370	1385	1395	13114
Size	10" x 50'	10" x 60'	10" x 70'	10" x 80'	13" x 70'	13" x 85'	13" x 95'	13" x 114'
Tractor requirements, hp	40	48	55	65	80	90	100	165



**Backsaver Auger 16** - The line of 16" augers, available in 84' and 104', is a high capacity auger capable of a 77' vertical reach. Using the industry-proven scissor lift undercarriage and heavy duty components, the 16" line of augers are built to be durable, reliable and move a lot of grain.

MODEL	1684	16104
Size	16" x 84'	16" x 104'
Tractor requirements, hp	150	175



**Conventional Auger 8 / 10 / 13** - The sturdy lightweight assembly allows the conventional auger to be easily transported. The trailing swivel wheels can be raised hydraulically to allow for increased turning radius as well as smooth transitions over uneven terrain.

MODEL	831	836	1031	1036	1336
Tube diameter, in	8		10		13
Tube length, feet	31	36	31	36	36
Gasoline hp (3450 rpm)	12	12	18	22	30
Electric hp (1725 rpm)	5	10	10	15	22

## Products for Every Farm



**Hammermill** - The Farm King hammermill does the job quickly and economically, grinding as much as 75 bushels per hour. The hammers are made from high quality carbon steel for extra-long life.

MODEL	60
Capacity (approx.)	75 bu/hr
Screen size	6" wide x 14" round
Motor required (approx.)	5 - 7.5 hp, 3450 rpm motor (not included)



**Rollermill** - Available in three sizes, Farm King roller mills are capable of processing up to 300 bushels per hour. An optional magnet removes nails and other metal objects from the grain and prevents them from damaging the rollers.

MODEL	85	100	180
Capacity (approx.)	50-100 bu/hr	100-150 bu/hr	200-300 bu/hr
Roll diameter	8"	10"	10"
Drive required	PTO or 3-5 hp electric	PTO or 5-7.5 hp electric	40-60 PTO drive hp



**Grain Cleaner** - The Farm King grain cleaner separates the dockage from grain before it gets shipped or stored, increasing profit by reducing bin storage capacity and shipping costs. Screenings can be used as animal feed.

MODEL	360	480
Drum diameter / length, in	36/73	48/98
Motor required (approx.)	1 hp	3 hp
Capacity (Dry corn, bushels per hour)	700	2500



### CX<sup>III</sup> Auger 8/10

The gearbox, with left- or right-side drive, is positioned higher on the tube to allow the auger to reach deeper into the bin. The replaceable double intake flighting is standard and the intake has been lengthened to 24" for more capacity. All models are available with a reverse shift gearbox. Double edge intake flighting on the 8/10 models for longer life. The auger intake has been extended by 6", now 24" long for higher capacity.

### Auger Mover

The auger mover mounts to the line of CX augers, eliminating the stress and labor from relocating or repositioning the auger between bins or across the yard.



### Unloading Auger

Farm King unloading augers transfer grains and oilseeds much faster than conventional utility augers and reach where normal portable augers can't. The hopper of the unloading auger fits under hopper bottom bins and hopper trailers for fast and easy unloading.



### Utility Auger

Farm King manufactures a wide selection of utility augers with tube widths ranging from 4" to 8" in lengths from 11' to 23'. The components are adaptable to suit various configuration and capacity requirements and solid construction and heavy gauge tubing ensure additional durability and longevity.



**Tillage** Farm King Tillage has been proven over thousands of acres and more than five decades of breaking land. Designed to meet the needs of farmers and contractors, every piece of Farm King Tillage utilizes an overbuilt and heavy-duty design. Farm King offers a full line of offset and tandem discs, in addition to a line of cultivators, chisel plows, chisel cultivators and vertical tillage.



**HSCD (high compact speed disc)** - The High Speed Disc is a high speed compact disc that excels at managing difficult residue in challenging field conditions. Designed for high speed operation, the High Speed Disc is more productive than traditional tillage since it operates at field speeds of 8 - 12 mph (12 - 20 km/hr).

MODEL	HS.8525	HS.8530	HS.8535	HS.8540
Widths, working	25' 5"	30' 5"	35' 5"	40' 5"
Weight class	1031 lb/ft	947 lb/ft	895 lb/ft	854 lb/ft
hp required*	12 - 15 hp/foot (9 to 11 kW per 305 mm)			



**VT3000** - The adjustable gang angle, from 0° to 16°, makes the VT3000 a unique vertical tillage tool with multi-season use and various soil bed applications. With multiple blade sizes and blade spacing, the VT3000 can be configured for specific regional requirements or soil types.

MODEL	3290 (8")	3320 (8")	3345 (8")	3375 (8")	3290 (9")	3320 (9")	3345 (9")	3375 (9")
Widths, working	28' 10"	31' 7"	34' 2"	36' 11"	28.10'	32'	35' 2"	38' 4"
Weight class	800 lb/ft class (1190 kg/m)				800 lb/ft class (1190 kg/m)			
hp required*	10 to 15 hp/ft							



**Offset Disc** - Farm King offset discs are available in four weight classes ranging from 550 lb/ft to 1050 lb/ft. Designed to be stronger and last longer Farm King discs feature extreme duty bearings and optional interlocking 1/2 spools and the industry's strongest and tightest gangs with steel fabricated spools torqued to an impressive 3,200 ft-lb.

MODEL	1225	1275	1375	8550
Widths, working	10' to 20'	10' to 20'	10' to 15'	9.5' to 15.5'
Weight class	550 lb/ft	650 lb/ft	750 lb/ft	1050 lb/ft
hp required*	6 to 8 hp/ft	9 to 12 hp/ft	15 to 20 hp/ft	25+ hp/ft



**Tandem Disc** - Utilizing a one of a kind floating hitch, Farm King tandem discs leave a more level finish when compared to competitive units. All Farm King disc gangs are torqued to an unparalleled 3,200 ft lbs of torque. Steel fabricated spools are built to withstand heavy shock loads and prevent gangs from slipping.

MODEL	395	4490	4590	6650/6650NT	6650LTF	8700	8700LTF
Size	11.5" to 20'	18' to 28'	28.0' to 40.5'	16' to 35.5'	40' to 42'	24' to 38.5'	40.5' to 42.5'
Weight, lb	350 lb/ft	500 lb/ft	600 lb/ft	600 lb/ft	700 lb/ft	700 lb/ft	700 lb/ft
hp required*	6 to 8 hp/ft	6 to 8 hp/ft	6 to 9 hp/ft	6 to 9 hp/ft	10 to 15 hp/ft	10 to 15 hp/ft	10 to 15 hp/ft

\* All horsepower is tractor engine horsepower, per foot. Horsepower requirements depend on terrain, soil type and depth of cut.



**Application Equipment** Farm King Application Equipment has been designed to provide many years of profitable and dependable service. Known for dependability and value, Farm King manufactures a wide array of application equipment. Every model is available in red/cream or green/cream colour schemes.



**1840 Applicator** - The high-clearance toolbar design and user friendly hydraulic concepts combined with the field proven asymmetrical tank gives this unit a short wheelbase that tracks exceptionally well in all field conditions.

MODEL	1840
Tank size, gallon	1800 gallon, stainless steel baffle, hopper bottom sump
Toolbar width, feet	widths up to 45 ft'
Row Spacings	20", 22", 30", 38"
Tractor SCV valves required	3 SCV valves (1 - fold/unfold, 2 - raise/lower, 3 - pump)



**1860/2460 Applicator** - This unique toolbar features an industry leading 36" of crop clearance to expand the window of application. Adjustable hydraulic down pressure provides excellent ground contour following.

MODEL	1860	2460
Tank size, gallon	1800	2400
Toolbar width, feet	60', 66'	60', 66'
Row Spacings	36 - 20", 36 - 22", 24 - 30", 18 - 38"	
Tractor SCV valves required	3 SCV valves (1 - fold/unfold, 2 - raise/lower, 3 - pump)	



**Utility Sprayer** - Boom height adjustments are easily made using the single hydraulic cylinder and vertical mast. The utility sprayer is constructed with the best materials and is designed for many years of trouble-free service.

MODEL	1000
Tank size, gallon	1000
Boom length, front fold, feet	60
Options	Chemical eductor, foam marker



**Fertilizer Applicator 1410**

Each Farm King fertilizer applicator is tuned to deliver top-notch performance and dependability. The custom 1000 gal. tank features a 4" deep box sump, 16" fill well, and 3" cam lever quick fill.



**Fertilizer Applicator 1460**

The heavy-duty 4 x 6 double frame features twin cylinder height adjust with hydraulic depth control assist, 7.6-15SL adjustable wing gauge wheels, and hydraulic wing fold with 7° down-flex. 1600 gallon tank.



**Liquid Supply Trailer**

Minimal soil compaction and tight turning radius. Use this four-wheel steer trailer to supply your planter, field cultivator and strip till.



**Hay Tools** Farm King now offers an expanded line of hay and forage tools including rakes, cutters, mowers and bale carriers. This equipment has been designed to handle the rigorous demands of high volume multi-seasonal use for farms and ranches and commercial hay operations.



**Round Bale Carrier** - The 1450 round bale carrier can carry seven 5' by 6' bales weighing up to 900 kg (2,000 lb) each in a single row. The double wide Farm King 2450 round bale carrier has twice that capacity. The 2400 model is specifically designed to work in hilly or smaller field structures and boasts a capacity of 12-4' and 8-5' wide bales.

MODEL	1450	2450	2400
Capacity	Seven 5' x 6' bales, or Eight 4' x 6'	Sixteen 4' bales, or Fourteen 5' bales	Ten 4' x 6' or Eight 5' x 6' bales
Tractor requirement, hp	60	80	80
Weight, lb	5,495	9,375	6,600



**Square Bale Carrier** - The square bale carrier picks, hauls and stacks eight 48" x 48" bales or can double row twenty 32" x 34" x 96" bales.

MODEL	4480
Capacity	Eight 48" x 48" bales or can double row twenty 32" x 34" x 96" bales
Tractor requirement, hp	100
Weight, lb	9,485



**420 Rotary Rake** - Specifically designed for use in smaller field structures, operating with minimal impact and processing the crop with extreme delicacy. Provides smooth operation with 4 tandem axle pneumatic tires.

MODEL	RR420
Working width	13.8'
No. of arms	11
Weight, lb	1,411



**Double Rotary Rake** - The double rotary rake by Farm King is a semi-mounted rake designed for larger field structures and high volume production designed for use with 70-80 hp tractors. This single windrow machine with overlapping rake wheels ensure that no material is left on the field.

MODEL	RR7700FK
Working width	23' thru 26'
Tractor requirement, hp	70 - 80
Weight, lb	3,951



### Square Bale Carrier System Monitor

Designed to be intuitive and straightforward, the main menu offers four options, selected by buttons located next to the screen. Shipped from the factory with default settings, the bale carrier is ready for operation once shipped.



**Tedder** - The Farm King tedder is designed to increase the value of your hay and make your operation more productive. Available in 10', 17' and 19' lengths, there is a Farm King tedder to meet your needs.

MODEL	RT10	RT17	RT19	RT24
Working width	10'	17'	19'	24'
Tractor requirement, hp	20	20	20	30
Weight, lb	904	992	1,213	1,918



**Easy Rake** - Raking your windrows with the Farm King easy rake eliminates numerous field passes and provides uniform rows. Available with 10, 12 and 14 wheel tine configurations and working widths of 21, 24 and 27 respectively.

MODEL	RE10	RE12	RE14
Working width	21'	24'	27'
No. of wheels	4	4	6
Weight, lb	3,250	3,450	4,320



**Easy Rake - Superstar** - The frame and independent finger wheels enable the machine to adapt to the most varied work conditions. Opening and closing is hydraulically controlled. Windrow width is adjusted with a bushing system.

MODEL	RS16	RS18	RS20
Working width	32'	35'	38'
Transport width/length, feet	9.2/34	9.2/37	9.2/40
Weight, lb	5,619	7,198	7,519



**Bat Rake** - The Farm King bat rake is engineered to be compact and maneuverable, with the versatility to create windrows that work for your operation. A high clearance frame allows you to rake hay in any condition.

MODEL	8	10	12
Working width	8'	10'	12'
Tractor requirements, hp	20	20	30
Windrow width, min/max, in	37 / 83	37 / 83	37 / 83
Weight, lb	1,433	1,631 lb	1,874 lb

### Rotary Rake vs. Double Rotary Rake

The 420 has one rotor with right-hand side discharge. It's 14' working width and features like the pivoting headstalk, wheel spacing and placement within the articulated frame make it perfect for smaller fields or rolling terrain.

The double rotary rake is ideal for larger operations and bigger fields. With nearly 26' of working width, the intersection of the arms create a central single windrow. Despite the large size, the steering system enables ease of use in transport as well as maneuvering in headlands. Functions and operation is hydraulically controlled from the cab.

Both units are equipped with oil bath gearboxes, cardan shafts, slip clutch, are easily transportable and highly effective tangential tine arms that really give an exceptional quality raking experience and superior forage preservation.

### Selecting the Right Rake

The Easy Rake is a smaller sized rakes up to the 14 wheel models. The larger Superstar Rakes have 16, 18 and 20 wheel configurations.

Easy Rakes have adjustable working width/windrows and can be used for one-sided windrows and can reach steering angles of 90 degrees. These rakes feature pivoting wheels solid construction. Auto transport locks and transport mode are engaged from the tractor cab. Each rake wheel floats independently to help follow the terrain to rake more effectively.

The Superstar features a heavy frame, standard tandem axles and larger wheels for work in heavier crops such as corn stalks and thick alfalfa. The frame articulates and the side frames hinge on the 18 and 20 wheel.

The Bat Rake is a built for faster operation in tough conditions.

### BW150 vs BW 200 Bale Wrappers

The BW150 bale wrapper is a simple 3-point hitch mount machine. Load a bale onto the machine and activate with the controls of the tractor. Wrap the bale and manually unload the bale when it is done. A simple, economical way to wrap bales.

The BW200 bale wrapper is self-loading and unloading. Everything is done from the seat of the tractor and only one operator is needed to wrap bales.





**Bale Wrapper** - The BW150 and 200 bale wrappers are designed for farmers who are looking for a high performing bale wrapper. The 200 is a professionally trailed machine with lateral side loading arms and the 150 attaches to a 3point hitch.

MODEL	150	200
Tractor requirement, hp	40	40
Weight, lb	992	2,095



**Sickle Bar Mower** - Available in three sizes the sickle bar mower was designed for simple operation and effective cutting. The tilting mower bar provides a clean cut on ditches, embankments and hills.

MODEL	RBS6	RBS7	RBS8
Working width	6'	7'	8'
Tractor requirements	25 hp	25 hp	40 hp
Weight, lb	583	634	711




**Disc Mower** - The MDN 5, 6 and 7 are constructed using only the highest-grade steel and gear components. Two cone discs are located on each end of the disc assembly to assist in swath formation and shaping.

MODEL	MDN5	MDN6	MDN7
Working width	7'	8' 1"	9' 4"
Number of discs/blades	5/10	6/12	7/14
Tractor requirements, hp	40	50	55
Weight, lb	1,000	1,200	1,300



**Pendolare Disc Mower**- The center pivot point enables this professional-grade mower to float over varying terrain and still provide an even cut. Available adjustments allow for a customized cut. Finger or roller conditioners are available.

MODEL*	245	285	320	245F	285F	320F	245R	285R	320R
Overall width, in	96	112	128	96	112	128	96	112	128
Tractor requirements, hp	65	75	80	70	80	90	75	85	95
Weight, lb	1,370	1,525	1,675	1,675	1,850	2,050	1,765	1,940	2,140

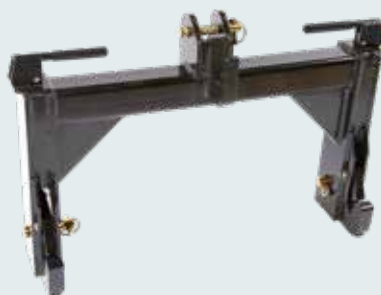

### Quick Hitch

A Farm King quick hitch can make light work of hooking up implements to the 3-point hitch. Attach the quick hitch to your tractor's 3-point hitch just like you'd hook up a piece of equipment. When the sway links are set you don't have to adjust them again, and you can leave the quick hitch on your tractor all the time.



**Landscaping Equipment** Farm King has been building equipment for the agriculture industry for more than 70 years. Known for dependability and value, Farm King manufactures a wide array of landscaping equipment for tractors starting at 12 hp, all of which are quick hitch compatible. Farm King landscaping equipment has undergone years of testing and refinement and is built to be rugged and long lasting.



**Rotary Cutter** - Farm King rotary cutters are made to clear those rough areas where stones, tree stumps and debris are hidden by weeds. These rotary cutters are available in two series, both of which are available with a 3-point hitch. Series 2 are available with a trailing kit.

SERIES	I	I	II	II	II
<b>MODEL</b>	<b>410</b>	<b>510</b>	<b>510</b>	<b>620</b>	<b>720</b>
Cutting width/height, in	48/min 3	60/min 4	60/min 4	72"/min 4	84"/min4
Tractor requirement, hp	20 - 45	25 - 55	25 - 65	35 - 65	45 - 75
Weight, 3-pt/Trailing, lb	450/n/a	520/n/a	601/686	777 /856	989/1080



**8' Twin Spindle Rotary Cutter** - The twin spindle rotary cutter is a simple and robust machine designed for tractors above 40 HP. Extremely high blade speeds and a 2" diameter cutting capacity make this a very effective machine for rough cutting requirements. Standard equipment includes safety chain, stump jumper and replaceable skid shoes.

MODEL	820
Tractor requirement, hp	40
Weight, lb	1550



**10.5' Flex-Wing Rotary Cutter** - The 10.5' has a wing only on one side instead of on both. It has an exceptionally robust gearbox rated at 250 HP for the splitter and 190 HP on the wing which is at the extreme duty level for spec comparisons. This machine is meant for gently sloping or slightly contoured right of ways, roadsides, pastures or for residue in row crop fields and are an excellent choice for agricultural, state/provincial or municipal mowing applications.

MODEL	1030
Cutting width/height, in	10.5' / 2-15"
Tractor requirement, hp	65
Weight, lb	5,200



**Flex-Wing Mower** - Excellent shredding and even distribution is found in the flex-wing mower from Farm King. Designed to cut everything from light brush to wheat stubble and corn stalks. The suspension provides an even cut and the machine has one of the lowest transport widths in the industry.

MODEL	1530
Cutting width/height, in	180/1.75 to 16.75
Tractor requirement, hp	85
Weight, lb	4,500 to 5,050



**Rotary Tiller** - Farm King has a collection of rotary tiller models to suit your garden and landscaping needs. The tiller attaches to the three-point hitch and is designed to fit a variety of tractors, from 12 hp to 65 hp.

SERIES	25	25	25	45	45	65	65
<b>MODEL</b>	<b>236</b>	<b>245</b>	<b>254</b>	<b>4560</b>	<b>4572</b>	<b>6572</b>	<b>6582</b>
Width, tillage/overall, in	36/46.5	45/54.5	54/66.5	55/66	69/78	68/78	77/88
Tractor requirement, hp	12 - 18	14 - 22	18 - 25	25 - 40	30 - 45	45 - 55	55 - 65
Weight, lb	385	418	477	613	688	906	968



**Post Hole Digger** - The Farm King post hole digger uses an impressive one or two flighting design to dig deep into the hardest compact soil in any region. Each model also comes with a five year limited warranty on most gearbox components.

MODEL	150	160	205	210
Hitch size	Cat. 0	Cat. I/II	Cat. I/II	Cat. I/II
Weight, lb	149	160	206	210



**Post Driver** - The 3-point post driver works with your tractor or skid-steer for efficient effortless post driving. Available in a PTO or 9hp engine models, Farm King post driver trailers can work with a tractor or behind a pick-up truck.

MODEL	1450	2400, ENGINE OR PTO DRIVE
Hammer weight	310 lb	310 lb empty, up to 700 lb ballasted
Weight	1135 lb	PTO: 1190 lb, Engine: 1300 lb



### Cultivator

Superior soil penetration is what you will get every pass with the Farm King cultivators. These cultivators are design to give the operator optimal depth control and even soil distribution. Heavy-duty gauge wheels and a rigid design allow the cultivator to remain stable when digging deep into the soil. Models available are 609, 7211, 8413.

### Box Scraper

Two 1/2" x 6" replaceable, back to back blades make this bi-directional scraper extremely versatile. The scarifier shanks are heat treated and are easily adjusted for depth. 4', 5', 6' & 7' models are available with weights of 320, 378, 428 and 469 lb respectively.

### Disc

Farm Kings discs are heavily constructed to provide long lasting equipment for multiple applications. Specializing in seedbed preparation, the Farm King disc penetrates the crusty, hard packed soil and rejuvenates it for easy seed application. Hardened steel discs help churn the soil to reveal a nutrient rich layer and deeper rich soil texture. There are four models of disc ranging from 5.5'-8.5'.

### Landscape Rake

The Farm King landscape rake is ideal for seedbed preparation and trash removal from long grass, dirt and gravel. Five-positions of angle adjustment allows the operator to evenly distribute crushed rock or clumped soil. 5', 6', 7' and 8' models are available.

### Drag Harrow

Three available sizes of harrow in 80", 100" and 120" make any large job feel small. These harrows are great for leveling driveways, gravel parking lots, weeding out tilled soil and removing embedded trash from gravel and soils.

### Mounted Following Harrow

Farm King harrows mount to tillage tools with a single, heavy 3" square tube carrier arm. The 3/8" x 16" coil spring lay back teeth can be quickly lever-adjusted to five positions to give you the desired penetration and vibration action.



**Full Line of Finishing Mowers** - Farm King offers a full line of finishing mowers for various mowing applications. The Home Owner series offers excellent value in a well-built package designed for light- to medium-duty applications, requiring less horsepower but still providing a high blade-tip speed for an excellent finish.

For more demanding mowing jobs, the Heavy-Duty series uses heavier gauge steel and includes solid reinforcing plates under the deck at all spindle and axle mounting locations, heavy duty cast sealed spindles and spring loaded self tensioning belt adjustment.



**Finishing Mower (Home-Owner)** - The home-owner finishing mower series was designed as an economical choice for use on large acreage homesteads. These finishing mowers are quick hitch compatible.

MODEL	430	530	630
Cutting width/height, in	48/1.5 to 4.5	60/1.5 to 4.5	72/1.5 to 4.5
Tractor requirement, hp /3-pt hitch	12 - 25/Cat. I	15 - 30/Cat. I	20 - 30/Cat. I
Weight, lb	442	503	569



**Finishing Mower (Heavy-Duty)** - Manufactured with top quality material, the edge of the mower deck features solid reinforcing rods. Each mower features three high-speed blades with one of the highest rated tip-speeds in the industry.

MODEL	555	655	755
Cutting width/height, in	60/1.5 to 5.5	72/1.5 to 5.5	54/1.5 to 5.5
Tractor requirement, hp /3-pt hitch	15 - 55/Cat. I	20 - 55/Cat. I	25 - 55/Cat. I
Weight, lb	627	697	780



**Triplex Finishing Mower** - Three of these finishing mowers together create one magnificent volume grass trimmer. Nine blades generate a powerful vacuum for a crisp, clean cut. Each deck floats independently over rolling terrain for a uniform, manicured trim.

YT MODEL	450	550	650	750
Cutting width/height, in	132	162	192	237
Tractor requirements, hp	45	55	65	80



# Products for Every Farm



**Snowblower** - Farm King has been building reliable snowblowers for more than three decades. Through the years the design has been refined to create an excellent snowblower that is easy to use and maintain. Conventional and Propeller styles are available.

MODEL	500	600	660	740	840	840G	960Q	1080C	1200
Working width/height, in	50/25	60/25	66/25	74/30	84/30	84/30	96/36	108/41	120/41
Tractor requirement, hp	15-30	20-40	20-40	40-70	60-90	60-90	90-125	120-180	180-225
Weight, lb	422	470	515	756	848	878	1243	2398	2600



**Propeller Series Snowblower** - These snowblowers perform exceptionally well in hard packed snow and ice conditions. Paddles on the auger replace traditional flighting, breaking up larger pieces of snow and ice before reaching the fan for smoother flow.

MODEL	PR5010	PR6010	PR6610	PR7420	PR8420	PR8420G	PR9620	PR1080	PR1200
Working width/height, in	50/25	60/25	66/24	74/25	84/25	84/25	96/36	108/41	120/41
Tractor requirement, hp	15-30	20-40	22-40	40-70	60-90	60-90	90-125	120-180	180-225
Weight, lb	422	470	515	756	848	878	1,243	2,398	2,6000



**Pull Type Snowblowers** - The pull type snowblowers are 3-point hitch mounted snowblowers that have been inverted to operate in the forward direction of travel, improving the comfort and effectiveness of the operator. A rear scraper allows for better clearing closer to buildings.

MODEL	PT740	PT840	PT840G
Working width/height, in	74/30	84/30	84/30
Tractor requirement, hp	40-70	60-90	60-90
Weight, lb	965	995	878





**Allied by Farm King** Allied has a long history of quality-built agricultural and commercial grade attachments. A wide variety of equipment has been developed to meet the tough demands of farmers, contractors and landscapers. The products that carry the Allied by Farm King brand uphold the tradition of durable equipment that is adaptable to any environment.



**Snowblower** - Allied has been building reliable snowblowers for more than three decades. Through the years the design has been refined to create an excellent snowblower that is easy to use and maintain.

MODEL	5010	6010	6610	7420	8420	8420G	9620Q	1080C
Working width/height, in	50/25	60/25	66/25	74/30	84/30	84/30	96/36	108/41
Tractor requirement, hp	15 - 30	20 - 40	22 - 40	40 - 70	60 - 90	60 - 90	90 - 125	120 - 180
Weight, lb	422	470	515	756	848	878	1243	2398



**Propeller Series Snowblower** - These snowblowers perform exceptionally well in hard packed snow and ice conditions. Paddles on the auger replace traditional fighting, breaking up larger pieces of snow and ice before reaching the fan for smoother flow.

MODEL	PR5010	PR6010	PR6610	PR7420	PR8420	PR8420G	PR9620	PR1080	PR1200
Working width/height, in	50/25	60/25	66/24	74/25	84/25	84/25	96/36	108/41	120/41
Tractor requirement, hp	15-30	20-40	22-40	40-70	60-90	60-90	90-125	120-180	180-225
Weight, lb	422	470	515	756	848	878	1,243	2,398	2,6000



**Binary Series Snowblower** - This snowblower offers the flexibility to be used on a skid steer or a tractor with a PTO and 3-point hitch. By removing a few bolts and changing some hardware, the hydraulic snowblower can be used on a traditional farm tractor.

MODEL	500	600	660	740	840
Working width/height, in	50/24	60/24	66/24	74/25	84/25
Weight, lb	480	528	573	814	906



**HD Hydraulic Snowblower** - The Allied HD hydraulic snowblowers have been engineered to maximize your skid steers efficiency. Available in high and low flow configurations, designed to be durable and reliable.

MODEL	6025	6035	7225	7235	8425	8435
Working width/height, in	60/25	66/25	72/35	72/35	84/25	84/35
Weight, lb	828	828	923	1084	951	1108



**Rear Blade** - These blades are manufactured using more steel, which adds strength, longevity and durability to each blade. Available in five series suitable for tractors ranging from 30 hp to 155 hp, Cat. I, II & III.

SERIES	30			45			60			80			100			155		
MODEL	3048	3060	3072	4560	4572	4584	6084	6096	8084	8096	80108	10096	100108	15596	155108	155120	155144	
Maximum hp	30	30	30	45	45	45	60	60	80	80	80	100	100	155	155	155	155	
Weight, lb	130	155	180	263	283	289	405	450	939	969	989	1287	1352	1683	1770	1749	1846	



**Rotary Sweep** - Cuts cleaning jobs in half with a rugged and durable design. The rotary sweep is available in 5.57' thru to 7.75' sweeping widths ensuring no surface goes untouched. Available in both skid steer and 3-point hitch mount.

MODEL*	6032P	6032PS	6032W	6032WS	7232P	7232PS	7232W	7232WS	8432P	8432PS	8432W	8432WS
Overall width, in	69	69	69	69	81	81	81	81	93	93	93	93
Mount system	Cat. I	Skid Steer	Cat. I	Skid Steer	Cat. I	Skid Steer	Cat. I	Skid Steer	Cat. I	Skid Steer	Cat. I	Skid Steer
Weight, lb	640	640	640	640	740	740	840	740	740	840	840	840

\*P=Poly, W=Wire/Poly



**Stump Grinder** - The Allied by Farm King stump grinder can cut through even the hardest stumps. The impressive 45° swing arc allows the stump grinder to cover greater surface areas of larger trees.

MODEL	2628	3633	2628H
Hitch	Cat. I	Cat. I / II	Universal skid steer
Cut height, above ground/below ground, in	18/10	18/15	18/10
Weight, lb	660	880	757



**Front-End Loader, 95 Series**  
Earlier model tractors continue to use our time-proven 95 series loader, for tractors with 15 to 190 hp which has one of the largest mounting kit application lists in the industry.

SERIES	95 SERIES
MODEL	95 / 195 / 295 / 395 / 495 / 495S
Tractor requirement, hp	15-100
Weight, lb	475-2070
MODEL	595 / 595S / 695 / 795 / 795S / 895 / 895S
Tractor requirement, hp	50-190
Weight, lb	2190-3390



**Front-End Loader, Midmount 2000 Series** - Designed specifically for modern tractors, the midmount 2000 series provides enhanced visibility, increased lifting capability and superior breakout force.

SERIES	MIDMOUNT 2000 SERIES
MODEL	2095 / 2195 / 2295 / 2395 / 2495 / 2495TSL / 2495S / 2495 STSL / 2595 / 2596 / 2595TSL / 2596TSL / 2595S / 2596S / 2595S / 2596STSL / 2695 / 2795HD / 2795HDTSL / 2795HDS / 2795HDSTSL / 2895 / 2895TSL / 2895S / 2895STSL / 3995TSL
Tractor requirement, hp	15-300
Weight, lb	500-4275



## Attachments

### Brush Grapple

The large 50 inch grapple opening allows the operator to pick large quantities of branches at one time. Models in 62 and 77 inch widths.

### Snow Blade

The Allied by Farm King snow blade can come equipped for a front end loader or skid steer configuration. Blade widths range from 60" to 108" and the weights range from 334lbs to 690lbs.

### Standard Bucket

Available in 48", 60", 72", 84", 96" and 100". Capacities range from 6.3 cu. ft. up to 1.19 cu. yd.

### Large Capacity/Snow Bucket

Available in 84" and 100" sizes. Capacities range from 1.35 cu. yd. up to 2.25 cu. yd.

### C2000/C3000/C4000 Series Grapple

Standard with 84" cross tube to fit on 84" and larger standard and large capacity buckets.

### Ballast Box

Provides weight to the rear axle for added stability and traction of the tractor.

### Skid Steer Adapter Plate

Allows the user to pick up any skid steer attachment.

### A Frames

Models for both round and square bales.

### Pallet Fork 'A' Frame Kit

Forks available in 48" (4,400 lb capacity) and 42" (2,000 lb capacity) sizes.

### Square Bale Stacker Frame

Install up to 8 additional stabilizer spears. Telescopic extension kit - for up to 3 square bales at a time.

### Round Bale Squeeze

For loader models 395, 495, 595, 695 and 795. Euro and skid steer mount available. Designed for round bales, wrapped or dry.

[www.farm-king.com](http://www.farm-king.com)

# Farm King

1260 Clarence Avenue  
Winnipeg, Manitoba Canada R3T 1T2  
Ph: 204.661.8711 | Fax: 204.654.2503  
Toll Free: 888.524.1003  
E-mail: [info@buhler.com](mailto:info@buhler.com)  
Web: [farm-king.com](http://farm-king.com)

Equipment shown is subject to change without notice. ©2018 Buhler Trading Inc.  
Printed in Canada. TSX:BUI. Ref: 052018

**bühler** | a division of Buhler Industries Inc.

