

Folder van onze binnendeuren. Voor meer informatie kan u ons contacteren Tel: 0478/11.84.15 mail: info@ecowin.be



CONTENTS

| STILE DOORS | | | 06 |
|---------------------------------------|------------|--|------------|
| Miskant | 118 | Irys | 118 |
| Laurencja | 126 | Daglezja | 126 |
| Surmia Budleja | 144 | Frezja Debecja | 144 |
| Epimedium Epimedium | 152 | Nemezja | 152 |
| Aralia | 158 | Berberys | 158 |
| Ewodia | 164 | Floks | 164 |
| Nolina Powojnik | 166 148 | Krokus Kamelia | 166 148 |
| Magnolia | 152 | Petunia | 152 |
| Juka | 158 | Azalia | 158 |
| Forsycja Lawenda | 164 | Hiacynt Fragi | 164 164 |
| HARDWARE - HANDLES | | | 06 |
| TECHNICAL INFORMATION | | | 06 |
| DOOR FRAME EXTENSION PANELS | i | | 06 |
| Uno premium | 118 | Milda | 118 |
| Turan Miskant | 126 144 | Baldur Anubis | 126 |
| Nemezja | 144 | Sylena | 144 |
| Laurencja | 152 | 37.01.0 | |
| INLAYS | | | 06 |
| FLUSH DOORS | | | 06 |
| Uno premium | 118 | Lorient | 118 |
| Baldur | 126 | Menton | 126 |
| Altamura Ansedonia | 144 | Sorano | 144 |
| INTERIOR FRONT DOORS | | | 06 |
| Forteca RC2 | 118 | Fixed and adjustable door frame for Herse Set series | 118 |
| Forteca RC3 | 126 | Steel door frames for Herse Set series | 126 |
| Fixed door frame for Forteca | 144 | United steel door frame for Herse Set series | 144 |
| Steel door frames for Forteca | 148 | | |
| Herse Set | 45 | | |
| Herse Max Set | 45 | | |
| INTERIOR FIRE PROTECTION FROM | T DOORS | | 06 |
| Leda EI30 | 118 | Steel door frames for the Leda series | 118 |
| Leda E160 | 126 | Double-leaf Leda Ei30 Ei60 | 126 |
| Wooden door frame for the Leda series | 144 | Hyperion EI30 RC2 | 144 |
| HARDWARE - HANDLES | | | 06 |
| TECHNICAL INFORMATION | | | 06 |
| DOOR FRAME EXTENSION PANELS | , | | 06 |
| WALL-MOUNTED SLIDING DOOR S | SYSTEMS | | 0.6 |
| POCKET SLIDING DOOR SYSTEMS | | | 06 |
| DOUBLE-LEAF DOORS | | | 06 |
| FOLDING DOORS | | | 06 |
| COVERT CONCEALED DOOR SYSTE | M | | 06 |
| LIGHTING | | | 06 |
| DOOD EDAMES | | | 06 |

DECORS

COLOURS AVAILABLE FOR INTERIOR DOORS

GREKO, FINISH



















PREMIUM







OAK PREMIUM

SNOW-WHITE GREKO

WHITE BARK PREMIUM



WHITE PREMIUM























WHITE CPL 0,2 I 0,7 3.)



ASH GREY CPL 0,2 10,7^{2.)}



ANTHRACTE CPL0,210,74)



OAK CPL 0,2 1 0,7





UV PAINTED



1.1 Similar to: RAL 9003, NCS S0500-N 2.1 Similar to: RAL 7047, NCS S2500-N 3.1 Similar to: RAL 9003, NCS S0300-N 4.1 Similar to: RAL D2 000 35 00 NCS S7000-N 5.1 Similar to: RAL 9003, NCS S0500-N

Special AntiFinger coating to reduce dirt and fingerprints.

REBEATED STILE DOORS



STILE

Two types of stiles to choose: MDF stile for the GREKO laminates or Glulam wood stile for the PREMIUM and CPL laminates.





COLORS

Wide range of colors: up to 22 decors.

GLAZING

- Optional modern tempered and frosted.
- Aesthetic frameless tongue-andgroove glazing without bars, solid dowel joint with 35 mm or 22 mm thick rail





VENTILATION

Three types of ventilation: sleeves, grill or cut.

DOOR FRAMES

Fixed* and adjustable door frame with 6 cm or 8 cm strip.







*Available only in rebeat system

AVAILABLE SYSTEMS

REBEAT SYSTEM

- Three silver 2-pin hinges adjusted horizontally Standard core lock Rebeat door leaf







NON-REBEAT SYSTEM

- three silver 2-pin hinges with 3D adjust Magnetic lock Leaf faced with door frame











MISKANT

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES

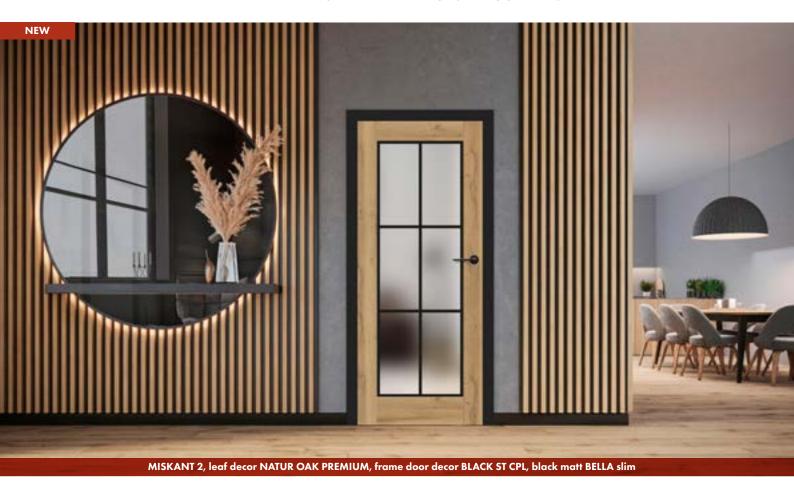

AVAILABLE SOLUTIONS







double-leaf door





sliding door

60

AVAILABLE **DOOR LEAF WIDTHS**60 70 80 90 100

GLAZING **STANDARD "OBVERSE"**





"REVERSE" GLAZING MADE TO ORDER



GLULAM WOOD STILE for the PREMIUM and CPL laminates without the Anti Finger coating











- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminat without the AntiFinger coating.

Optionally, upon extra charge, upper panels extending the frame page 134.

HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame.

Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

GLAZING

- Tempered frosted glass or clear glass, thickness 4 mm
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- Black lines of 18 mm in width (thickness).

GREKO



CPL

| NEW | | | | 100 | NEW | NEW | NEW |
|-------------------|------------|-----------------|--------------|------------------|---------------------------------|----------------------|-----------------|
| | | | 100 150 | 11 120 1 104 | | | |
| white ST CPL 134) | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappuccino ST CPL ⁴⁾ | light-grey ST CPL 4) | black ST CPL 4) |

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs).

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop down gasket²⁾.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black) Price for 1 set.

Can be replaced with a black magnetic lock for non-rebated door leaves.

Magnetic stop (buffer) (available in six colours p. 132).

¹⁾ Plain white laminate imitating a painted surface. ²⁾ A stop prevents application of a drop-down gasket and vice versa.

³¹ Concerns only PREMIUM and ST CPL decors ⁴¹ Special **AntiFinger** coating to reduce dirt and fingerprints.

LAURENCJA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS







double-leaf door





sliding door





AVAILABLE DOOR LEAF WIDTHS











- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.

NEW

- 4mm thick HDF panels with CPL or PREMIUM laminate.
- Very wide crossbar 35 mm.
- Optionally, upon extra charge, upper panels extending the frame - page 134

HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame.
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW

GLAZING

- Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

NEW

PREMIUM



EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs).

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾.

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).


¹⁾ Plain white laminate imitating a painted surface. 3) Special AntiFinger NEW coating to reduce dirt and fingerprints.

BUDLEJA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS





CZ standard



single leaf door

90 - 190* double-leaf door



60 - 100*

single leaf sliding







double-leaf sliding door

AVAILABLE DOOR LEAF WIDTHS







GLULAM WOOD STILEfor the PREMIUM and CPL laminates without the Anti Finger coating







- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.

Very wide crossbar - 35 mm.

NEW











- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame.

Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW



GLAZING

Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides.

Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

PREMIUM



| NEW | FB 85 | | | | NEW | NEW | NEW |
|--------------------|------------|-----------------|--------------|------------------|---------------------|----------------------|-----------------|
| | 13 50 | | | 11/10/11/11 | | | |
| | | | | | | | |
| white ST CPL 1) 3) | aok ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappuccino ST CPL3) | light grey ST CPL 3) | black ST CPL 3) |
| | | | | | | | |

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs).

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾.

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

¹⁾ Plain white laminate imitating a painted surface. 3) Special AntiFinger NEW coating to reduce dirt and fingerprints.

ARALIA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS



CZ standard





double-leaf door



single leaf sliding



double-leaf

sliding door





AVAILABLE DOOR LEAF WIDTHS



GLULAM WOOD STILE

for PREMIUM laminates





- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.

4mm thick HDF panels with GREKO, CPL or PREMIUM finish.

NEW



HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW



GLAZING

- Frosted decor mat glass 4 mm or custom-made frosted VSG 221 laminated safety glass, frosted or black NEW smooth on both sides, for an additional charge.
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing).

PREMIUM



EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs).

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾.

Frosted or black VSG 221 NEW laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

EPIMEDIUM

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



*) The pictures show only the EPIMEDIUM doors with 80 and 70 cm wide leaves. The glazing to vertical bars ratio in the other width options differs considerably, which can be the key factor regarding the customer's product choice. For the other width options go to www.erkado.pl

AVAILABLE SOLUTIONS



PL standard



CZ standard



single leaf door



double-leaf door



single leaf sliding door



sliding door



double-leaf



AVAILABLE DOOR LEAF WIDTHS














MDF STILE NEW for the GREKO and CPL laminates with





GLULAM WOOD STILE

for the PREMIUM and CPL laminates without the Anti Finger coating











- Rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminat without the AntiFinger coating.

NEW

- 4mm thick HDF panels with GREKO, CPL or PREMIUM finish.
- Narrow, long crossbar of 22 mm.

HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame

Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW


GLAZING

Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides.

NEW

- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- Depending on the leaf width, the glazing widths differ. Check at www.erkado.pl

GREKO

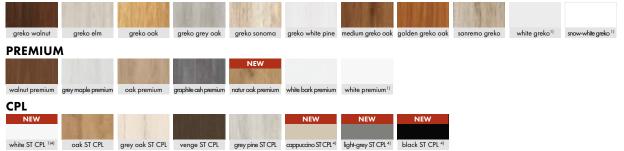

EXTRA CHARGES

Ventilation cut

Plastic woodgrain sleeves (4 pcs).

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾.

Frosted or black VSG 221 NEW laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

Can be replaced with a black magnetic lock for non-rebated door leaves.

1) Plain white laminate imitating a painted surface.

³¹ Concerns only PREMIUM and ST CPL decors ⁴¹ Special **AntiFinger** NEW coating to reduce dirt and fingerprints..

MAGNOLIA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS



CZ standard





double-leaf door



single leaf sliding



sliding door





AVAILABLE **DOOR LEAF WIDTHS**













- Rebated or non-rebated door leaf made in the STILE technology
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminat without the AntiFinger coating.

4mm thick HDF panels with GREKO, CPL or PREMIUM finish.

NEW







HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.






GLAZING

Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides.

NEW

Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

GREKO



CPL

| NEW | UTB 18-5 | | ALC: NO. | 15 1 3 63 | NEW | NEW | NEW |
|-------------------|------------|-----------------|--------------|------------------|---------------------------------|----------------------|-----------------|
| | | | | 11/10/11/11 | | | |
| white ST CPL 1343 | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappuccino ST CPL ⁴⁾ | light-grey ST CPL 4) | black ST CPL 4) |

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs)

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾.

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

Can be replaced with a black magnetic lock for non-rebated door leaves.

1) Plain white laminate imitating a painted surface. 3) Concerns only PREMIUM and ST CPL decors. 4) Special AntiFinger NEW coating to reduce dirt and fingerprints.

IRYS

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS







double-leaf door



door



sliding door





AVAILABLE DOOR LEAF WIDTHS











- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and NEW vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.
- 4mm thick HDF panels with GREKO, CPL or PREMIUM finish.

NEW



HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW




Tempered 4 mm glass, frosted or transparent as a standard and, for an additional charge, laminated VSG 221 safety glass frosted or black smooth on both sides.

NEW

Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

GREKO



CPL

| NEW | UTB 18-5 | | ALC: NO. | 15 1 3 63 | NEW | NEW | NEW |
|-------------------|------------|-----------------|--------------|------------------|---------------------------------|----------------------|-----------------|
| | | | | 11/10/11/11 | | | |
| white ST CPL 1343 | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappuccino ST CPL ⁴⁾ | light-grey ST CPL 4) | black ST CPL 4) |

EXTRA CHARGES

Ventilation cut.

walnut premium

Plastic woodgrain sleeves (4 pcs)

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

¹⁾ Plain white laminate imitating a painted surface.


³⁾ Concerns only PREMIUM and ST CPL decors ⁴⁾ Special **AntiFinger** NEW coating to reduce dirt and fingerprints.

DAGLEZJA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS







single leaf door



double-leaf door



single leaf sliding



double-leaf sliding door





AVAILABLE DOOR LEAF WIDTHS







GLULAM WOOD STILE for the PREMIUM and CPL laminates without the Anti Finger coating





- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.

4mm thick HDF panels with GREKO, CPL or PREMIUM finish

NEW



HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW



Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides.

NEW

Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)























greko walnut **PREMIUM**













CPL





















EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs)

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf.

Drop-down gasket²⁾

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).


Can be replaced with a black magnetic lock for non-rebated door leaves

1) Plain white laminate imitating a painted surface.

³⁾ Concerns only PREMIUM and ST CPL decors 4) Special **AntiFinger** NEW coating to reduce dirt and fingerprints.

FREZJA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES

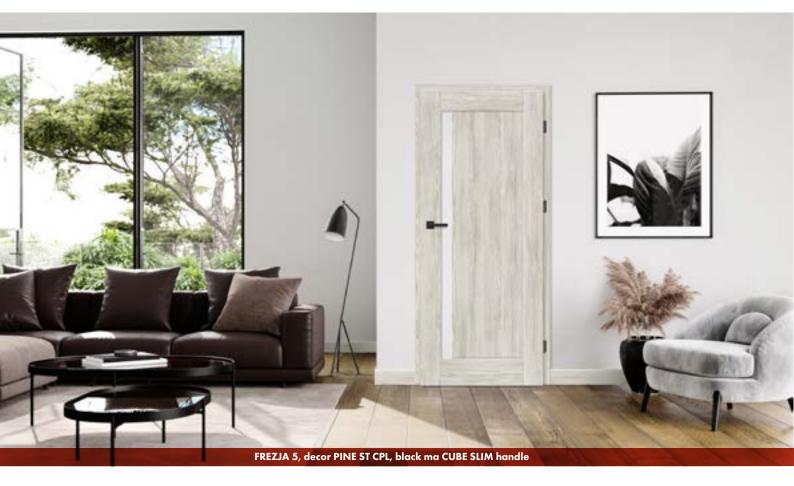

AVAILABLE SOLUTIONS







single leaf door



double-leaf door



single leaf sliding



sliding door



REBEAT

double-leaf









VENTILATION CUT FREZJA 8



GLULAM WOOD STILE for the PREMIUM and CPL laminates without the Anti Finger coating







- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.
- 16 mm thick HDF panels (also a 4 mm panel for the FREZJA 2 & 6 models) covered with the GREKO, CPL or PREMIUM laminate; FREZJA 7 is available with a mirror only.

NEW



HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame

Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW






GLAZING

4 mm frosted or transparent tempered glass or a mirror fied on one side (only FREZJA 7) as a standard and a VSG 221 frosted or black safety glass, smooth on both sides (does not apply to FREZJA 7, 8).

NEW

- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing).
- Fixed glazing widths: FREZJA 1 140 mm, FREZJA 5 70 mm

GREKO

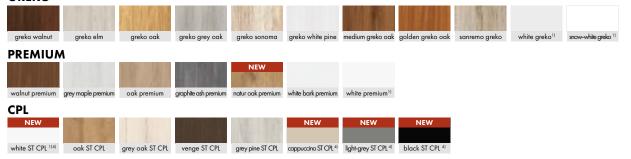

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs). 2)

Round and square metal sleeves2) (4 pcs); brushed nickel or patina finish white and black.

Ventilation grille 2) (only for door leaf widths of: 80, 90, 100).

"100" rebated and non-rebated door leaf.

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

¹⁾ Plain white laminate imitating a painted surface. 2) Not available in FREZJA 8, 3) FREZJA 8 is not available for sliding systems.

^{5]} Concerns only PREMIUM and ST CPL decors 4] Special AntiFinger NEW coating to reduce dirt and fingerprints.


NEMEZJA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS













- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger NEW coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.
- 4mm thick HDF panels with GREKO, CPL or PREMIUM



HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame

NEW

NEW

NEW

Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

GLAZING

- Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides
 - Possibility to change the glazing side to REVERSE (OBVERSE - standard glazing)

GREKO



| NEW | 178 B-C | | | 155 136 | NEW | NEW | NEW |
|-------------------|------------|-----------------|--------------|------------------|---------------------------------|----------------------|-----------------|
| | 113 130 | | THE STATE OF | o to the | | | |
| white ST CPL 1)4) | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappuccino ST CPL ⁴⁾ | light-grey ST CPL 4) | black ST CPL 4) |

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs)

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100)

"100" rebated and non-rebated door leaf.

Drop-down gasket. 2)

Magnetic stop (buffer). 2)

Frosted VSG 221 laminated safety glass, smooth on both sides

NEMEZJA 1 NEMEZJA 9 i 13 NEMEZJA 7

NEMEZJA 4 i 11 NEMEZJA 10

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

¹⁾ Plain white laminate imitating a painted surface.

³⁾ Concerns only PREMIUM and ST CPL decors 4) Special **AntiFinger** NEW coating to reduce dirt and fingerprints.

BERBERYS

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS






CZ standard



double-leaf door





sliding door





AVAILABLE DOOR LEAF WIDTHS



MDF STILE NEW for the GREKO and CPL laminates with the AntiFinger coating



GLULAM WOOD STILE

for the PREMIUM and CPL laminates without the Anti Finger coating









- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger NEW coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.
- 4mm thick HDF panels with GREKO, CPL or PREMIUM finish.
- Brushed aluminium insert profiles.







HARDWARE

Rebated door leaves: three silver 2-pin hinges adjusted horizontally.

Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame

Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW

NEW





Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides.

NEW

Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

GREKO



















PREMIUM

CPL

























EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves (4 pcs).

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket 2)

Frosted or black VSG 221 laminated safety glass, smooth on both sides.


Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

¹⁾ Plain white laminate imitating a painted surface.

³⁾ Concerns only PREMIUM and ST CPL decors ⁴⁾ Special **AntiFinger** NEW coating to reduce dirt and fingerprints.

FLOKS

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES

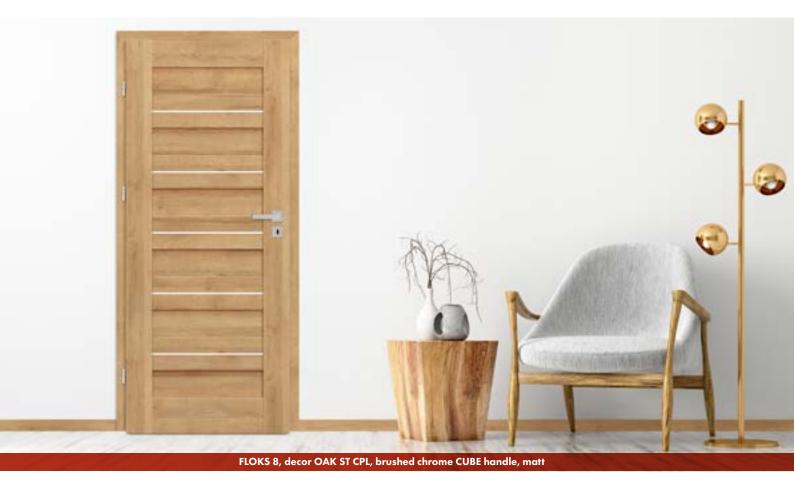

AVAILABLE SOLUTIONS



CZ standard





double-leaf door



single leaf sliding



double-leaf

sliding door





AVAILABLE DOOR LEAF WIDTHS



MDF STILE for GREKO laminates



GLULAM WOOD STILE for PREMIUM and CPL laminates









- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger NEW coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.

4mm thick HDF panels with GREKO, CPL or PREMIUM finish.









HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW





GLAZING

Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black safety glass, smooth on both sides.

NEW

Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

GREKO





| NEW | 100 | | | | NEW | NEW | NEW |
|-------------------|-------------|-----------------|--------------|------------------|---------------------------------|---------------------------------|-----------------|
| | 100 100 100 | | | 1.180 | | | |
| | | | | | | | |
| white ST CPL 1)4) | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappucaino ST CPL ⁴⁾ | light-grey ST CPL ⁴⁾ | black ST CPL 4) |
| | | | | | | | |

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves.

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket. 2)

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

¹⁾ Plain white laminate imitating a painted surface

KAMELIA

REBATED AND NON-REBATED INTERIOR STILE DOOR LEAVES



AVAILABLE SOLUTIONS








double-leaf door





sliding door





AVAILABLE DOOR LEAF WIDTHS



MDF STILE for GREKO laminates



GLULAM WOOD STILE for PREMIUM i CPL laminates









- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger NEW coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating

4mm thick HDF panels with GREKO, CPL or PREMIUM finish.

NEW







HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW






GLAZING

- Standard 4 mm clear or milk tempered glass and for an additional charge VSG 221 milk glass or black NEW safety glass, smooth on both sides.
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

NEW

GREKO

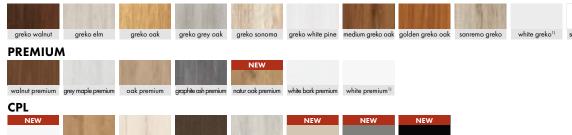

grey oak ST CPL venge ST CPL grey pine ST CPL cappuccino ST CPL⁴⁾ light-grey ST CPL⁴⁾

EXTRA CHARGES

Ventilation cut.

Plastic woodgrain sleeves.

Round or square metal sleeves (4 pcs); brushed nickel, patina, black or white.

Ventilation grille (only for door leaf widths of 80, 90, 100).

"100" rebated and non-rebated door leaf.

Drop-down gasket. 2)

frosted or black VSG 221 NEW laminated safety glass, smooth on both sides, price for 1 piece.


Metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black).

¹⁾ Plain white laminate imitating a painted surface.

³⁾ Concerns only PREMIUM and ST CPL decors ⁴⁾ Special **AntiFinger** NEW coating to reduce dirt and fingerprints.

FRAGI

REBATED INTERIOR STILE DOOR LEAVES

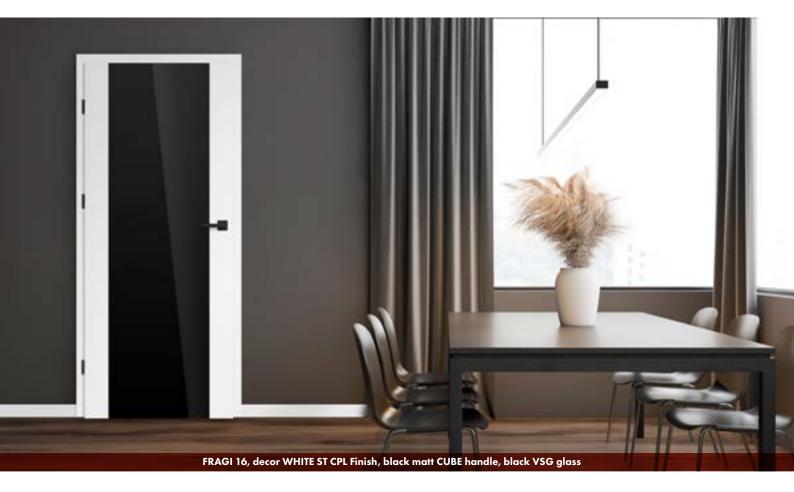

AVAILABLE SOLUTIONS







double-leaf door



AVAILABLE DOOR LEAF WIDTHS










"REVERSE" GLAZING MADE TO ORDER



GLULAM WOOD STILE for PREMIUM and CPL laminates











- Rebated door leaf made in STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating


HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- A deadbolt lock, euro profile cylinder, economy lock or with a thumb turn.

GLAZING

- 8 mm tempered or tempered and VSG/ESG 441 laminated safety glass, frosted or black, smooth on both sides (for FRAGI 15 & FRAGI 16 models).
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

GREKO

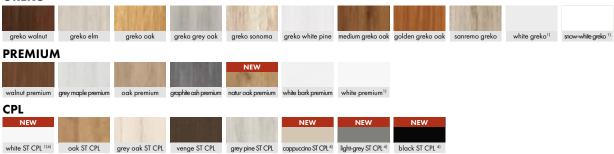

EXTRA CHARGES

Ventilation cut.

metal hinge casings in rebated door leaf (colour: brushed nickel, patina, glossy chrome, glossy brass, white or black)

NOTE: The picture shows only an 80cm-wide door leaf. The proportion in the picture differ slightly for the other FRAGI 1 model widths. For further details and photos go to our website: www.erkado.pl

 $^{^{\}rm 1]}$ Plain white laminate imitating a painted surface.

PAINTED DOORS



STILES

Two types of stile: MDF stile for the GREKO laminates or Glulam wood stile for the PREMIUM and CPL laminates.





COLORS

Door surface in white titanium UV. It is a modern technology of multiple painting and hardening with UV varnish.

GLAZING

A choice of 8mm safety glass: tempered, laminated.

VENTILATION

Possibility of making ventilation cut.

FRAMES

Fixed* and adjustable door frame with 6 cm or 8 cm strip.







*Available only in rebeat system

AVAILABLE SYSTEMS

REBEAT SYSTEM

- three silver 2-pin adjustable hinges standard lock core door leaf with rebeat





NON-REBEAT SYSTEM

- three concealed hinges with 3D adjustment magnetic lock leaf faced with door frame









REVERSE SYSTEM

- two concealed hinges with 3D adjustment magnetic lock leaf faced with door frame












UNO PREMIUM

REBATED, NON-REBATED AND REVERSE PAINTED DOORS

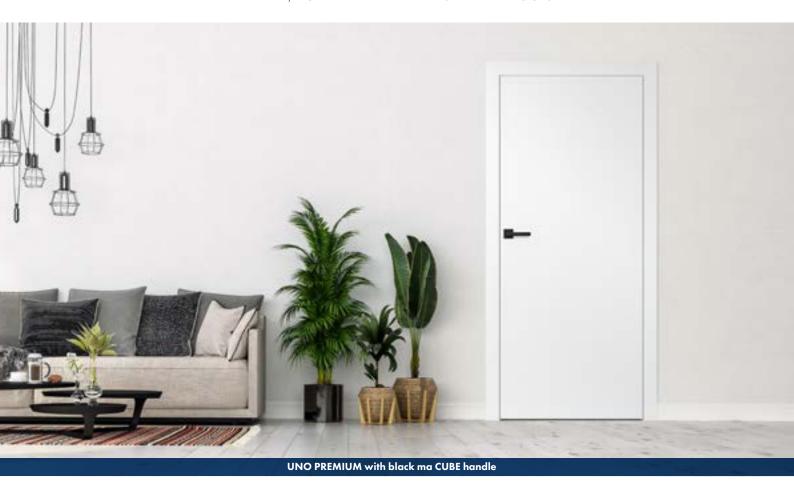

AVAILABLE SOLUTIONS









AVAILABLE DOOR LEAF WIDTHS

| 60 | 70 | 80 | 90 | 100 |
|----|----|----|----|-----|
| | | | | |

CZ standard







- Rebated, non-rebated or reverse door leaf
- Internal timber stile (sides and top, boom -MDF) covered with two HDF boards

NEW

Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions.
- Door leaf edge made in standard technology.

NEW

HARDWARE

Three pin mortise hinges in a rebated door leaf.

- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black for an extra charge); hinges are supplied and priced with the door frame.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or, optionally, for an additional charge, a black magnetic lock.

PAINTED

white titanium UV

EXTRA CHARGES

Reverse door leaf

Solid core filling.

Ventilation cut.

"100" rebated and non-rebated door leaf.

Drop-down gasket 2).

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

Can be replaced with a black magnetic lock for non-rebated and reverse leaves.

Stainless steel porthole: "chrome" polished or "satine" brushed; frosted decormat glass, clear glass; porthole ID 235 mm; external 350 mm).

^{*}NETTO PRICE, **BRUTTO PRICE, */**The price is for leaf, the price does not include handle and door frame.

¹⁾ Plain white laminate imitating a painted surface.


TURAN

REBATED, NON-REBATED PAINTED DOORS



AVAILABLE SOLUTIONS









- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.

4mm thick HDF panels with GREKO, CPL or PREMIUM finish.



NEW



FINISHING

 Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions.

HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf.
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

GLAZING

 TURAN 1 model, 8 mm tempered glass or, for an additional charge, frosted or black VSG441 laminated safety glass, smooth on both sides



PAINTED white titanium UV

MOULDING



EXTRA CHARGES

Ventilation cut.

"100" rebated and non-rebated door leaf. Drop-down gasket²⁾.


 $^{\rm 1)}\,\text{Plain}$ white laminate imitating a painted surface.

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).


MISKANT

REBATED, NON-REBATED PAINTED DOORS

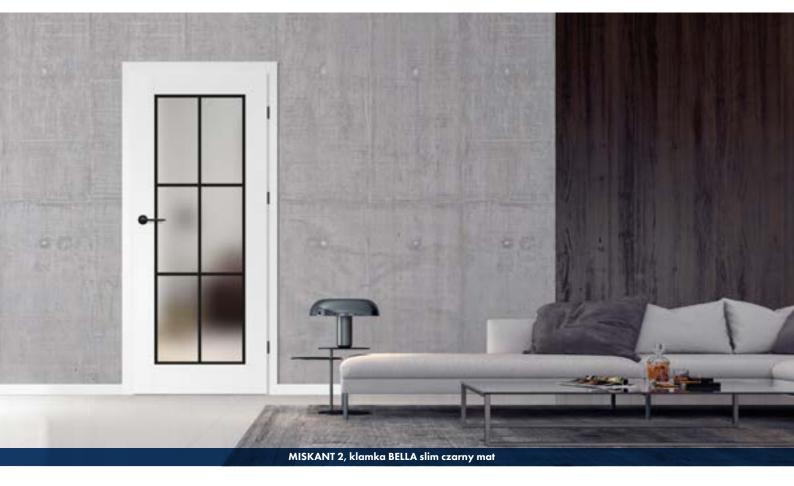

AVAILABLE SOLUTIONS























PAINTED

white titatnium UV

CONSTRUCTION

- Rebated or non-rebated door leaf made in the STILE technology.
- MDF board vertical stiles covered with the GREKO and CPL laminate with the AntiFinger coating and vertical glulam stiles covered with thin HDF panels and the PREMIUM or CPL laminate without the AntiFinger coating.
- Optionally, upon extra charge, upper panels extending the frame – page 134

FINISHING

 Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions. NEW

NEW

HARDWARE

- Rebated door leaves: three silver 2-pin hinges adjusted horizontally.
- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame.
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

NEW

NEW

GLAZING

 Toughened transparent or frosted glass with a thickness of 4 mm or, for an additional charge, laminated VCG 221 safety glass, smooth on both sides

NEW

- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)
- Painted black lines of 18 mm in width (thickness)

EXTRA CHARGES

Ventilation cut.

"100" rebated and non-rebated door leaf.

Drop-down gasket 2).


Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

Can be replaced with a black magnetic lock for non-rebated door leaves.

¹⁾ A stop prevents application of a drop-down gasket and vice versa.

NEMEZJA

REBATED, NON-REBATED PAINTED DOORS

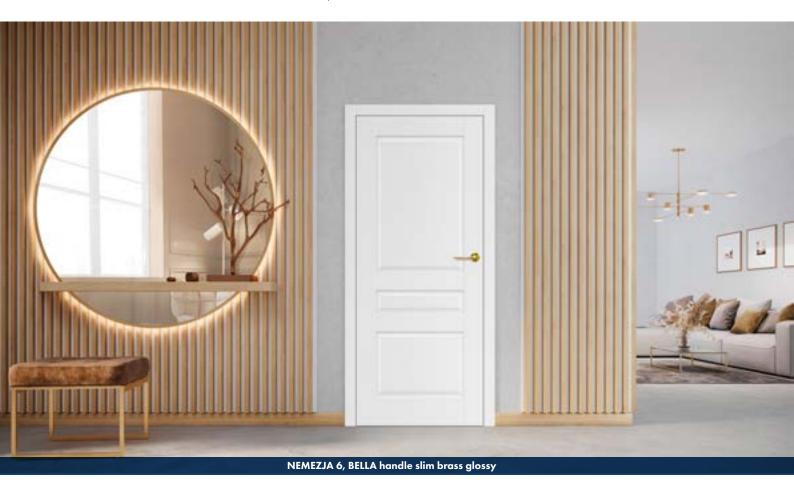

AVAILABLE SOLUTIONS









AVAILABLE DOOR LEAF WIDTHS

| 60 | 70 | 80 | 90 | 100 |
|----|----|----|----|-----|
| | | | | |









- Rebated or non-rebated door leaf made in the STILE technology.
- Timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish.

NEW

16 mm thick HDF panels, moulded and coated with UV resistant varnish.

FINISHING

Door leaves and door frames coated with water--based UV hardened varnish for high resistance to adverse use conditions.

HARDWARE

Rebated door leaves: three silver 2-pin hinges adjusted horizontally.

NEW

- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame.
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

GLAZING

- Frosted or transparent tempered glass as standard, and frosted or black VSG 221 laminated safety glass at an extra charge, smooth on both sides.
- Possibility to change the glazing side to REVERSE (OBVERSE - standard glazing).

PAINTED

white titanium UV

EXTRA CHARGES

Ventilation cut.

"100" rebated and non-rebated door leaf.

Drop-down gasket 1).

Factory through hole drilling for handles.

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

NEMEZIA 1 NEMEZIA 9 I 13 NEMEZIA 7

NEMEZJA 4 I 11 NEMEZJA 10

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

Can be replaced with a black magnetic lock for non-rebated door leaves.

LAURENCJA

REBATED, NON-REBATED PAINTED DOORS



AVAILABLE SOLUTIONS



CZ standard







- Rebated or non-rebated door leaf made in the STILE technology.
- Timber stiles covered with thin HDF boards and laminated and coated with UV resistant varnish.

NEW

 4 mm thick HDF panels, moulded and coated with UV resistant varnish.

FINISHING

 Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions.

HARDWARE

 Rebated door leaves: three silver 2-pin hinges adjusted horizontally. NEW

- Three concealed hinges in a non-rebated leaf, silver (optionally black - subject to an additional charge); hinges supplied with and included in the price of the door frame.
- Deadbolt lock in a rebated door leaf and a key-locked magnetic lock in a non-rebated door leaf, thumb turn cylinder, economy, with a silver blockade; optionally, for an additional charge, a black, magnetic lock.

GLAZING

- Frosted or transparent tempered glass as standard, and frosted or black VSG 221 laminated safety glass at an extra charge, smooth on both sides.
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing).

PAINTED

white titanium UV

EXTRA CHARGES

Ventilation cut.

"100" rebated and non-rebated door leaf.

Drop-down gasket 1).

Frosted or black VSG 221 laminated safety glass, smooth on both sides.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

Can be replaced with a black magnetic lock for non-rebated door leaves.

NEW

MILDA

REBATED, NON-REBATED AND REVERSE PAINTED DOORS



MILDA 4, CODE I REMIONI Hanaic,

AVAILABLE SOLUTIONS







double-leaf door



single leaf sliding



sliding door







AVAILABLE DOOR LEAF WIDTHS













- Rebated, non-rebated or reverse door leaf.
- Internal timber stile (sides and top, boom -MDF) covered with two HDF boards.
- Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions.
- Door leaf edge made in standard or non-rebated technology.

HARDWARE

- Three pin mortise hinges in a rebated door leaf
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves: thumb turn cylinder, economy or with a blockade.

PAINTED

white titanium UV

MOULDING



EXTRA CHARGES

Reverse door leaf.

Solid core filling.

"100" rebated and non-rebated door leaf.

Drop-down gasket 2).

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, while or black).

Ventilation cut.

BALDUR

REBATED, NON-REBATED AND REVERSE PAINTED DOORS



AVAILABLE SOLUTIONS




CZ standard










sliding door

AVAILABLE DOOR LEAF WIDTHS 100



VSG/ESG laminated and tempered glass as a standard, frosted or black







- · Rebated, non-rebated or reverse door leaf.
- Internal timber stile (sides and top, boom -MDF) covered with two HDF boards.
- Honeycomb stabilising filling or solid core filling for an additional charge

FINISHING

- Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions.
- Door leaf edge made in standard or non-rebated technology.

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves: thumb turn cylinder, economy or with a blockade.

GLAZING

- BALDUR 1, 3, 5 VSG/ESG 441 laminated and tempered safetyglass as a standard, frosted or black, smooth on both sides.
- Fixed glazing widths: BALDUR 1 50 mm, BALDUR 3, 5 – 210 mm.

PAINTED MOULDING white filternium UV



EXTRA CHARGES

Ventilation cut.

Solid core filling

Reverse door leaf.

"100" rebated and non-rebated door leaf.


Drop-down gasket (not for the BALDUR 1, 3, 5 models).

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black)

¹⁾ BALDUR 1, 3, 5 models unavailable in sliding systems and double-leaf doors.

SYLENA

REBATED, NON-REBATED AND REVERSE PAINTED DOORS

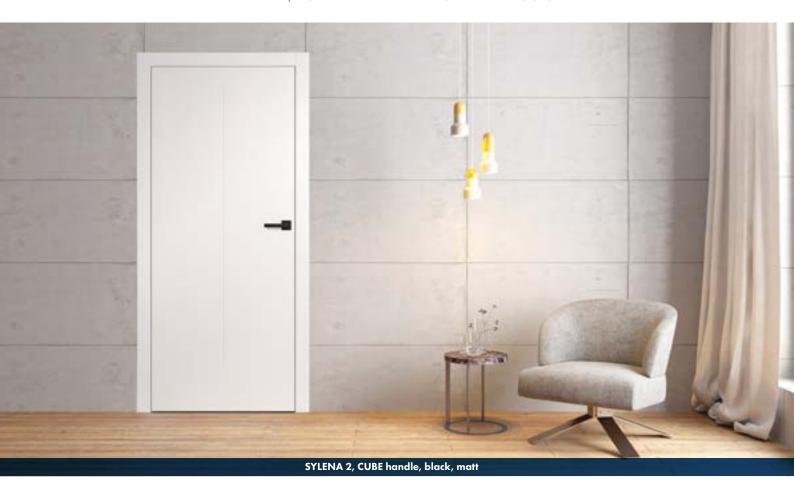

AVAILABLE SOLUTIONS



CZ standard





double-leaf door



single leaf sliding



sliding door







AVAILABLE DOOR LEAF WIDTHS









- Rebated, non-rebated or reverse door leaf.
- Internal timber stile (sides and top, boom -MDF) covered with two HDF boards.
- Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- Door leaves and door frames coated with water-based UV hardened varnish for high resistance to adverse use conditions.
- Door leaf edge made in standard or non-rebated technology.

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves: thumb turn cylinder, economy or with a blockade.

PAINTED

white titanium UV

MOULDING



EXTRA CHARGES

Reverse door leaf.

Solid core filling.

Ventilation cut.

"100" rebated and non-rebated door leaf.

Drop-down gasket.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black). Price for set for 1 hinge.

PANEL DOORS



STILES

Two types of filling to chose from: honeycomb or solid core filling.





COLORS

• Wide range of colors, up to 31 decors.

GLAZING

Standard or laminated, safety glass.

VENTILATION

• Three types of ventilation: sleeves, grilles or cut.

DOOR FRAMES

Fixed* and adjustable door frame with 6 cm or 8 cm strip.







*Available only in rebeat system

AVAILABLE SYSTEMS

REBEAT SYSTEM

- three silver 2-pin adjustable hinges standard lock core door leaf with rebeat





NON-REBEAT SYSTEM

- three concealed hinges with 3D adjustment magnetic lock leaf faced with door frame









REVERSE SYSTEM

- two concealed hinges with 3D adjustment magnetic lock leaf faced with door frame









INLAYS

DECORATIVE INSERT FLUSH WITH THE LAMINATE SURFACE

LUX INLAY **OAK**



LUX INLAY **OAK**



INLAYS

DECORATIVE INSERT FLUSH WITH THE LAMINATE SURFACE

LUX INLAY **OAK**

Door frame BLACK ST CPL Leaf NATUR OAK PREMIUM







INLAY LUX 214

INLAY LUX 207

INLAY LUX 209

LUX INLAY BRUSHED STEEL

Door frame and leaf LIGHT-GREY ST CPL











INLAY LUX 113

INLAY LUX 112

INLAY LUX 104

INLAY LUX 103

INLAY LUX 116







Available colours of the LUX INLAY: brushed steel, black, brushed gold, oak (compatible with OAK CPL 0.2 and 0.7).

The presented INLAYS can be optionally used in the following models for an additional charge:

INLAYS are located on both sides of the leaf and are flush with its surface. The inlay width is 8 mm and 220 mm (LUX 315 inlay).

- UNO PREMIUM okleina ALTAMURA 1 HERSE SET 32 dB

INLAY LUX 114 INLAY LUX 107

UNO PREMIUM


REBATED, NON-REBATED AND REVERSE INTERIOR DOORS



UNO PREMIUM inlay 313, leaf decor WHITE PREMIUM, door frame OAK CPL, handle LUNA PREMIUM round black matt

AVAILABLE SOLUTIONS







Black transverse door leaf edge finish (charged extra)





- Rebated, non-rebated or reverse door leaf.
- Internal timber stile (sides and top, bo om -MDF) covered with two HDF boards.
- Stabilizing "honeycomb" filling.
- 4 mm thick HDF panels, coated with CPL or Premium laminate.

FINISHING

- HDF board with PREMIUM laminate.
- Door leaf edge made in standard rebated or non-rebated technology.
- The edge laminated in the same colour as the door leaf surface or, optionally, in plain black (the decor options include NATUR OAK PREMIUM HORIZONTAL with a black edge with a horizontal structure).
- Inserts (inlay) colour: brushed steel, black, brushed gold and OAK CPL with a width of 8 mm or 220 mm (LUX inlay 315) flush with the leaf, on both sides of the leaf.

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black for an extra charge); hinges are supplied and priced with the door frame
- Bolt lock in the rebate leaf and a magnetic lock in the non-rebate and reverse leaf: with a key, thumb turn cylinder, economy or with silver, with a blockade; optionally, for an extra charge, a black magnetic lock.

NEW

NEW

PREMIUM



EXTRA CHARGES

Reverse door leaf.

Solid core filling.

Door closer reinforcement.

Arm door closer (silver, black, white, brown).

Ventilation door cut or grille.

Plastic woodgrain sleeves (4 pcs).

"100" rebated and non-rebated door leaf.

"110" rebated and non-rebated door leaf.

Drop-down gasket 2).

Round and square metal sleeves (4 pcs); brushed nickel or patina finish, white and black.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

Can be replaced with a black magnetic lock for non-rebated and reverse leaves.

Black door leaf edge finish.


Stainless steel porthole: "chrome" polished or "satine" brushed; frosted decormat glass, clear glass; porthole ID 235 mm external 350 mm).

LUX inlay; available versions at p. 56-57

¹⁾ Plain white laminate imitating a painted surface.


BALDUR

REBATED, NON-REBATED AND REVERSE PAINTED DOORS

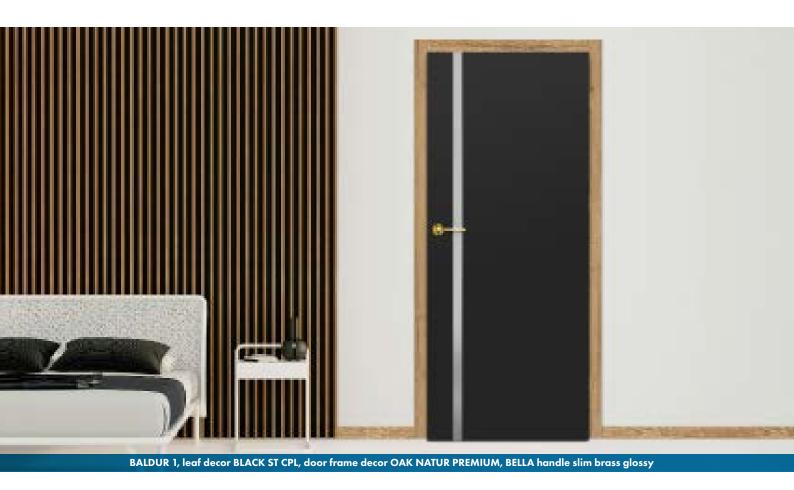

AVAILABLE SOLUTIONS















- Rebated, non-rebated or reverse door leaf.
- Internal timber stile (sides and top, boom -MDF) covered with two HDF boards.
- Honeycomb stabilising filling or solid core filling for an additional charge
- Unavailable in double-leaf doors and sliding systems.

FINISHING

- Płyta HDF pokryta okleiną PREMIUM lub CPL
- Door leaf edge made in standard or non-rebated technology in CPL 0,2 laminates, laminated with the ABS edging only in leaf color
- Reverse door leaf only in with the STANDARD edge and with the GREKO, PREMIUM and ST CPL decors
- The edge laminated in the same colour as the door leaf surface or, optionally, in plain black (NATUR OAK PREMIUM HORI-ZONTAL, black edge with a transverse structure) black, partial edge finish (two vertical and a top one) and by the glass.

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves: thumb turn cylinder, economy or with a blockade.

GLAZING

 BALDUR 1, 3 tempered frosted 8 mm or charged extra laminated and tempered VSG/ESG 441 safetyglass, frosted or black smooth on both sides

PREMIUM



EXTRA CHARGES

Reverse door leaf (unavaiable in CPL 0,2)

Solid core filling.

Ventilation cut.

"100" rebated and non-rebated door leaf.


Laminated VSG/ESG 441 frosted or black glass.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

Black leaf edge finish.


ALTAMURA

REBATED, NON-REBATED AND REVERSE INTERIOR DOORS

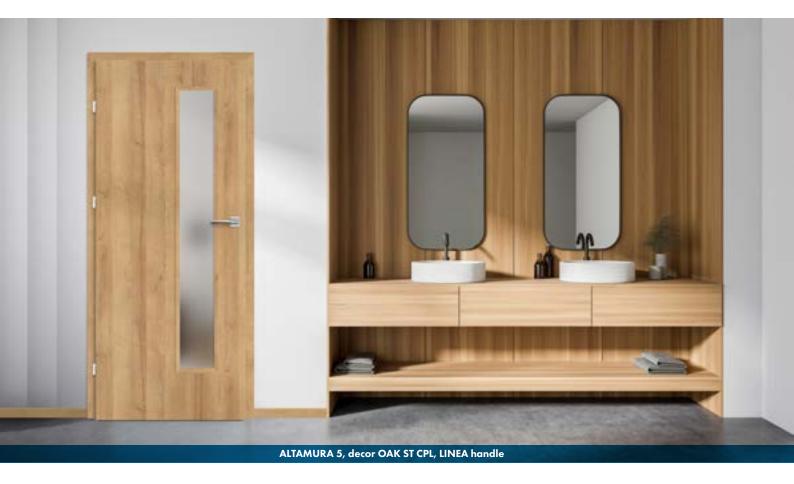

AVAILABLE SOLUTIONS



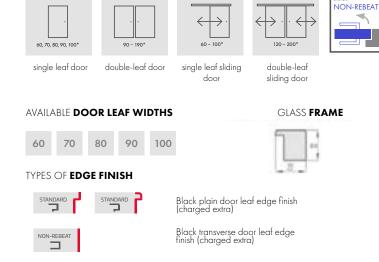





















- Rebated, non-rebated or reverse door leaf.
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates.
- Internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and PREMIUM decor.
- Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- Laminated HDF board.
- Door leaf edge made in the SOFT (FINISH & GREKO) or the STANDARD (FINISH, GREKO, PREMIUM & CPL) technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf.
- Reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors.

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf in silver (black for an extra charge); hinges are supplied and priced with the door frame.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves, thumb turn cylinder, economy or silver with a blockade or optionally, for an additional charge, a black magnetic lock.

GLAZING

- Decormat glass as standard frosted, transparent or charged extra VSG 221 safety forsted, smooth on both sides.
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing)

FINISH















GREKO



| | 11 35 | | | 10 10 | | | |
|-------------------|------------|-----------------|--------------|------------------|------------------|--------------------|-------------|
| white ST CPL 1)4) | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | ash grey CPL 0,2 | anthracite CPL 0,2 | oak CPL 0,2 |

EXTRA CHARGES

Reverse door leaf (unavailable for CPL 0,2 and 0,7).

Solid core filling

Door closer reinforcement.

Arm door closer.

Additional bottom bar (can be cut by customer up to max 8 cm).

Ventilation door cut or grille.

Metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black.

Black door leaf edge finish.

Plastic sleeves.

"100" rebated and non-rebated door leaf.

Frosted VSG 221 laminated glass.

Drop-down gasket.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

ALTAMURA 1: stainless steel porthole: polished "chrome" or brushed "satin" and black matt, frosted decormat glass, clear glass; portholedimeter: internal: 235 mm; external 350 mm).

Stainless steel panel (fitted on both sides in the rebated STANDARD door leaves only), height 300mm.


LORIENT

REBATED, NON-REBATED AND REVERSE INTERIOR DOORS





AVAILABLE SOLUTIONS



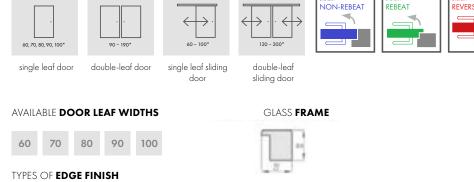









- Rebated, non-rebated or reverse door leaf.
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates.
- Internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in CPL and PREMIUM decor.
- Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- Laminated HDF board.
- Door leaf edge made in the SOFT or STANDARD technology.
- Reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors
- Edge (in standard or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with NATUR OAK PREMIUM HORIZONTAL, a black edge with a transverse structure)

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves: thumb turn cylinder, economy or with a blockade.

GLAZING

- Decormat glass as standard frosted, transparent or charged extra forsted VSG 221 safety glass, smooth on both sides.
- Possibility to change the glazing side to REVERSE (OBVERSE - standard glazing).

FINISH



PREMIUM



GREKO





EXTRA CHARGES

Reverse door leaf (unavailable for CPL 0,2 and 0,7).

Solid core filling.

door closer reinforcement.

Arm door closer.

Additional bottom bar (can be cut by customer up to max 8 cm).

Ventilation door cut or grille.

Metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black.

Black door leaf edge finish.

Plastic sleeves.

"100" rebated and non-rebated door leaf.

Frosted VSG 221 laminated glass.

Drop-down gasket.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

¹⁾ Plain white laminate imitating a painted surface. 2) Available only in SOFT version where laminate is joined in edging. 3) Available only in STANDARD.

SORANO

REBATED, NON-REBATED AND REVERSE INTERIOR DOORS




NON-REBEAT

REBEAT


AVAILABLE SOLUTIONS



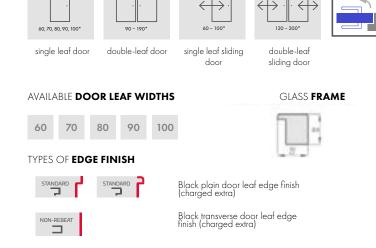





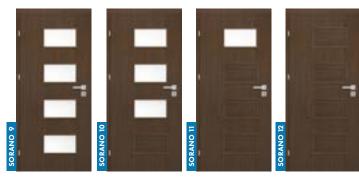

- Rebated, non-rebated or reverse door leaf.
- MDF stiles and rails covered with two HDF boards in GREKO and FINISH laminates.
- Internal timber stile (sides and top, bottom -MDF) covered with two HDF boards in the CPL and PREMIUM decor.
- Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- Door leaf edge made in the SOFT or STANDARD technology.
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the door leaf STANDARD and in GREKO, PREMIUM and ST CPL decors
- Reverse door leaf only in the STANDARD edge and in GREKO, PREMIUM and ST CPL decors.
- Edge (in standard or non-rebated finish) laminated in edging in the same colour as the surface or, optionally, in plain black (black edging with NATUR OAK PREMIUM HORIZONTAL, a black edge with a transverse structure).

HARDWARE

- Three pin mortise hinges in a rebated door leaf.
- Three concealed hinges in the non-adjacent leaf and two hinges in the reverse leaf.
- A deadbolt lock in the rebated door leaf and a key-locked magnetic lock in the non-rebated and reverse door leaves: thumb turn cylinder, economy or with a blockade.

GLAZING

- Decormat glass as standard frosted, transparent or charged extra forsted VSG 221 safety glass, smooth on both sides.
- Possibility to change the glazing side to REVERSE (OBVERSE - standard glazing).

FINISH



PREMIUM



GREKO



CPL

| | | 1 1 1 | | | | | |
|-----------------|------------|-----------------|--------------|------------------|------------------|--------------------|-------------|
| white ST CPL 1) | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | ash grey CPL 0,2 | anthracite CPL 0,2 | oak CPL 0,2 |

EXTRA CHARGES

Reverse door leaf (unavailable for CPL 0,2 and 0,7).

Solid core filling.

Door closer reinforcement.

Arm door closer.

Additional bottom bar (can be cut by customer up to max 8 cm).

Ventilation door cut or grille.

Metal round or square ventilation sleeves (4 pcs); brushed nickel or patina finish in white or black.

Black door leaf edge finish

Plastic sleeves.

"100" rebated and non-rebated door leaf.

Frosted VSG 221 laminated glass.

Drop-down gasket.

Metal hinge casings in the rebated door leaf (brushed nickel, patina, polished chrome, polished brass, white or black).

¹⁾ Plain white laminate imitating a painted surface. 2) Available only in SOFT version gdzie okleina jest łączona w felcu. 3) Available only in STANDARD.

GLASS DOORS



PATTERNS

Interesting design, 48 models to choose from.

COLOR

A wide range of door frames colors, up to 33 decors.

GLAZING

• Safety glass panes 8mm tempered or laminated glass.

VENTILATION

Possibility of making ventilation cut.

DOOR FRAMES

Fixed, adjustable door frame with 6 cm or 8 cm strip.



AVAILABLE SYSTEMS

GRAF GLASS DOOR SYSTEM

- modern design two solid hinges stainless steel hinges and handles or black lacquered













GRAF GLASS DOORS

INTERIOR GLASS DOORS

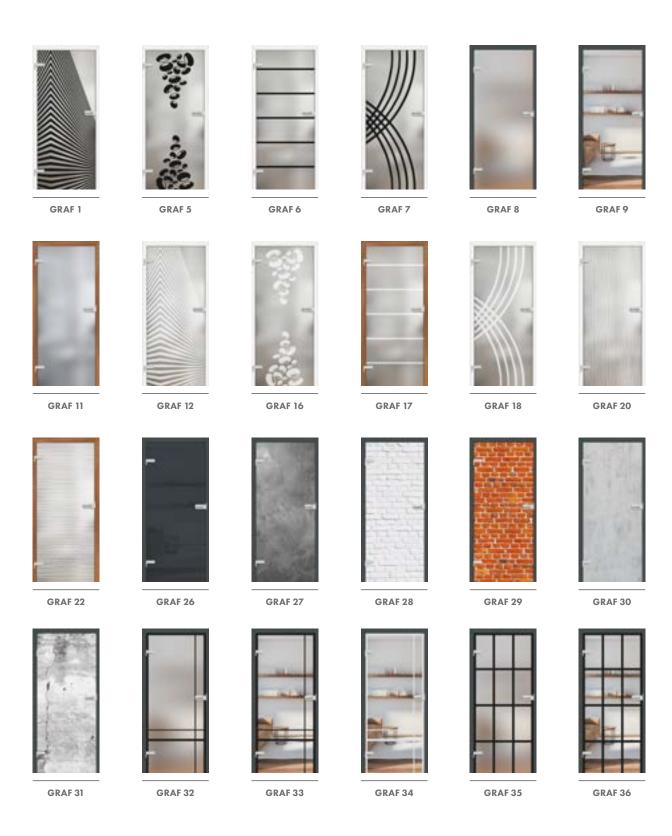

GRAF GLASS DOORS

INTERIOR GLASS DOORS

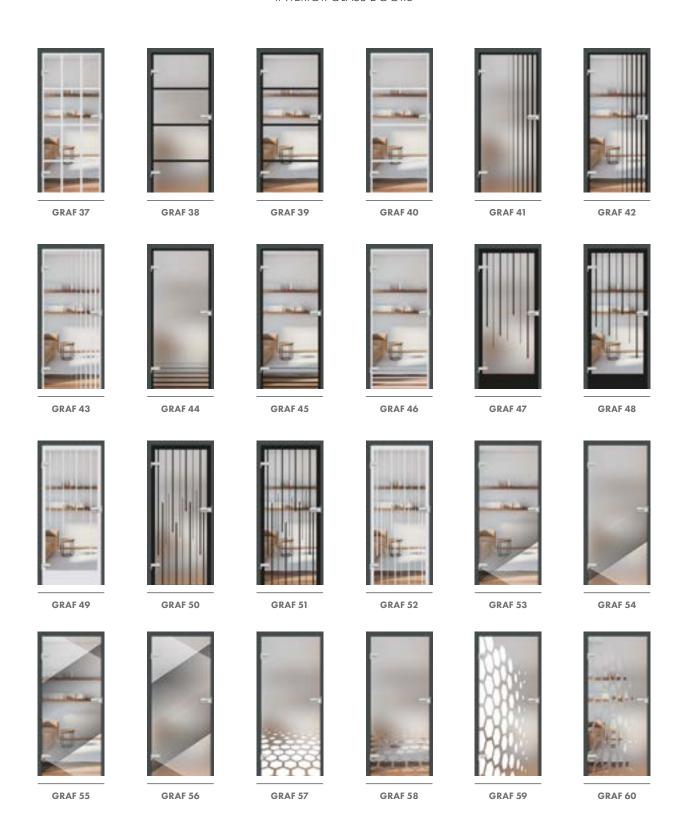

GRAF GLASS DOORS



CONSTRUCTION

- 8 mm tempered glass, 8 mm tinted glass (GRAF 26) and laminated glass 44.3 (GRAF 27, 28, 29).
- Possibility to change the glazing side to REVERSE (OBVERSE standard glazing).
- Frosted or clear glass with black or white painted decorative paerns.

FIXED AND ADJUSTABLE FRAMES

- Prices of fixed and adjustable frames for rebated doors.
- No electric strike possible.
- 10 mm pin hinge for glass panes frames.
- ONLY REBATED FRAMES IN ALL AVAILABLE DECORS, STEEL FRAMES AND THE WHITE PAINTED TITANIUM UV FRAME ARE AVAILABLE FOR GLASS GRAF DOORS.

NOTE

For the extended Glass Door Collection and a variety of available models go to our website: www.erkado.pl. You can also order the available models through the B2B panel.

AVAILABLE DOOR LEAF WIDTHS

60 70 80 90 (za dopłatą)

EXTRA CHARGES

Ventilation cut.

"90" door leaf.

METAL-BUD HARDWARE STAINLESS STEEL






HERSE SET 32dB

HERSE SET AKUSTIC 39 dB

FRONT DOORS WITH BURGLAR-PROOF LOCKS OR STRIP LOCKS

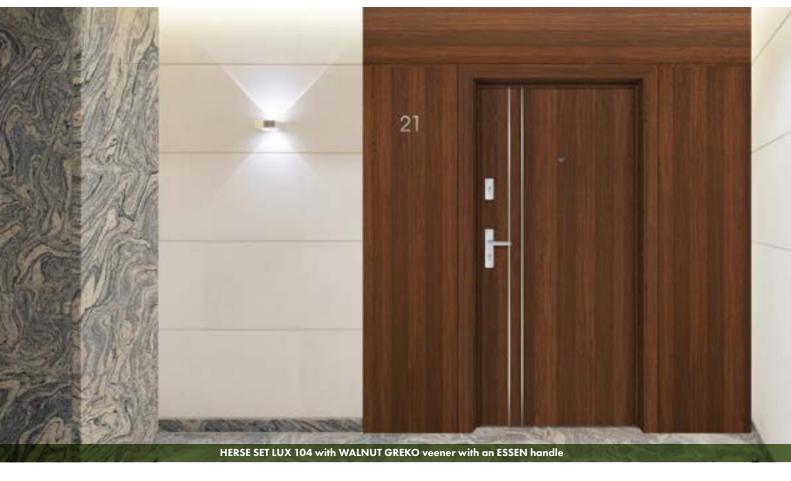

AVAILABLE SOLUTIONS





















adjustable main keeper in frame

stainless steel

threshold

three 2-pin hinges; Ø16, 3D adjustable

3 hinge bolts

hardwood threshold (lacquer)

ESSEN handle



door viewer









46 mm

DOOR LEAF

einforced with sheet steel



with channel bar








drop-down gasket

with pressure

adjustment



CROSS-SECTION OF HERSE DOOR LEAF 32 dB



GENRAL INFORMATION

- HERSE SET doors are designed for housing and public utility building as an entrance internal door (excluding the "80N" width).
- HERSE SET leaf with fixed and adjustable door frame with each of threshold available is rated for sound insulation at Rw = 32dB or extra charged Rw=39dB

CONSTRUCTION

- Timber and MDF stile covered with two HDF boards.
- Specially designed solid core filling.
- Robust steel channel section reinforced.
- Door leaf thickness of 46 mm.
- Additional gasket in the door leaf.

FINISHING

- Door leaf edge made in the SOFT or STANDARD technology
- CPL 0.2 & 0.7 laminates available only with the STANDARD edge with the ABS edging in the same colour as the door leaf only or, for an additional charge, with a standard black edge.
- 8 mm or 220 mm wide brushed steel, black or OAK CPL inlays flush with the door leaf, on both leaf sides.
- STANDARD edge laminated in the same colour as the door leaf or, optionally, plain black edging (NATUR OAK PREMIUM HORIZON-TAL, black edge with a transverse structure).
- Pre-cut up to 8 cm as an option.
- Custom order with the lower lock only as an option.
- Side and top panels glued to the wall (only with the adjustable door frame and an 8 cm square).

HARDWARE

- Three silver 2-pin hinges; Ø 16; 3D adjustable (2D with a steel frame).
- Two 3-pin Class 2 rated security locks with a thumb turn (optionally only lower).
- Three hinge bolts on the hinge side.
- possibility to apply an arm door closer.
- Lower lock PZ centre is 72 mm.
- Optionally, a bolt strip lock with two cores, for an extra charge.

REBATED FIXED AND ADJUSTABLE **DOOR FRAMES**

- Optionally, an electric door strike can be used in the door frame for the lower lock with no upper lock in the door leaf..
- Adjustable main keeper in frames.
- The 80N width is available for the fixed door frame only.

NEW



GREKO



FINISH



PREMIUM



CPL

| NEW | FB 85 | | | 100 | NEW | NEW | NEW |
|-------------------|------------|-----------------|--------------|------------------|---------------------------------|----------------------|-----------------|
| | | | | | | | |
| white ST CPL 1343 | oak ST CPL | grey oak ST CPL | venge ST CPL | grey pine ST CPL | cappuccino ST CPL ⁴⁾ | light-grey ST CPL 4) | black ST CPL 4) |

EXTRA CHARGES

Door viewer

Hardwood threshold (lacquer) for adjustable frames $55\ \mathrm{mm}$ or stainless steel threshold with gasket.

Arm door closer (silver, black, white, brown)

Door closer reinforcement.

Drop-down gasket 2).

Metal hinge casings: brushed nickel, patina, polished chrome, polished brass, while or black $\,$

LUX inlay; available versions p. 56-57.

Clip-on square, 3 pcs (extends the adjustment range by 20 cm).

Cutting the door leaf with a wooden frame up to 8 cm every 1 cm or product in CZ standard.

Black door leaf edge finish.

"100" door leaf or package.

30/45 lock core.

30G/45 or 30/45G cylinder-holder.

30/45 lock core and 30G/45 or 30/45G cylinder-holder in the masterkey system.

ESSEN handle (nickel, satin, patina, black).

ESSEN upper face plate (nickel, satin, patina, black).

Additional charge for HERSE SET AKUSTIC 39 dB door.

Multi-point bolt strip lock with two locks.

¹⁾ Plain white laminate imitating a painted surface.
³⁾ Available only in STANDARD.


⁴⁾ Special **AntiFinger** coating to reduce dirt and fingerprints.




FIXED AND ADJUSTABLE FRAMES

HERSE SET, HERSE MAX SET









| Door width | A | В | С | D | E | F |
|---------------|------|------|------|------|------|-----|
| "80N" | 804 | 777 | 764 | 852 | 872 | 756 |
| "80" | 844 | 817 | 804 | 892 | 912 | 796 |
| "90E" | 948 | 921 | 908 | 996 | 1016 | 900 |
| "100" | 1044 | 1017 | 1004 | 1092 | 1112 | 996 |

| Door width | A | В | С | D | E | F | G | н |
|---------------|------|------|------|------|------|-----|--------------|-----|
| "80" | 844 | 817 | 804 | 826 | 848 | 888 | 946*/986** | 796 |
| "90E" | 948 | 921 | 908 | 996 | 1016 | 900 | 1050*/1090** | 900 |
| "100" | 1044 | 1017 | 1004 | 1092 | 1112 | 996 | 1146*/1186** | 996 |

*strip 6 cm/**strip 8 cm



- The fixed frame, architrave and clip-on square in CPL 0.2 are also used in the set for door leaves in CPL 0.7.
- Joints at 90 degrees of the adjustable frame possible with the 8 cm architraves only. Extra charge for joint at 90 degree.
- Electric door strike.
- Door closer reinforcement for adjustable door frame.

- Square with three clips (square with clips extends the adjustment range by 20 mm)
- The architraves and quarter round.
- Cutting the door leaf with a wooden frame up to 8 cm every 1 cm or product in CZ standard.



HANDLES FOR PANEL, STILE DOOR LEAVES

RUMBA handle with antibacterial coating with active silver ions



black matt



key face plate



face plate



anti-bacterial toilet sign knob



METAL-BUD LUNA PREMIUM handle, SQUARE

Glossy chrome, brushed matt chrome, glossy brass, black matt

glossy chrome

brushed ma chrome

black ma





















key face plate face plate face plate for toilet door

METAL-BUD LUNA PREMIUM handle, ROUND

Glossy chrome, brushed matt chrome, glossy brass, black matt

glossy brass



























key face plate face plate face plate for toilet door

HANDLES FOR PANEL, STILE DOOR LEAVES

METAL-BUD CUBE SLIM handle (face plate width 6 mm)

Glossy chrome, brushed matt chrome, glossy brass, black matt

1EW

glossy chrome

glossy brass



key face plate face plate face plate for toilet door

METAL-BUD CUBE handle

Glossy chrome, brushed matt chrome, brushed ma nickel, black matt

brushed matt chrome

black matt



key face plate face plate face plate for toilet door

METAL-BUD CUBE PREMIUM handle

Glossy chrome, brushed matt chrome, brushed ma nickel, black matt

NEW

brushed nickel, matt



HANDLES FOR PANEL, STILE DOOR LEAVES

METAL-BUD BELLA SLIM SQUARE (prestige face plate of 6 mm in thickness)

Glossy chrome, brushed ma chrome, glossy brass, black ma

glossy chrome







black matt





METAL-BUD BELLA SLIM ROUND (prestige face plate of 6 mm in thickness)

Glossy chrome, brushed matt chrome, glossy brass, black matt

glossy chrome





face plate for toilet door

key face plate face plate











METAL-BUD TREND handle

Nickel satin, graphite/chrome, glossy chrome

nickel satin

graphite/chrome

glossy chrome









key face plate face plate face plate for toilet door

HANDLES FOR PANEL, STILE DOOR LEAVES

METAL-BUD DECO texture handle



decor MEDIUM GREKO OAK



decor GREKO WALNUT



decor BLACK



decor GREKO OAK



decor WHITE GREKO



decor GREKO SANREMO



decor GREKO SONOMA



METAL-BUD IBIZA handle

Glossy chrome, nickel satin, graphite/chrome, white matt, black matt

glossy chrome



black matt



graphite/chrome

nickel satin



white matt



METAL-BUD LINEA handle

Glossy chrome, graphite/chrome, nickel, satin

glossy chrome



graphite/chrome



nickel satin



Face plate

Glossy chrome, nickel satin, graphite/chrome, white ma, black ma for the DECO, IBIZA, LINEA model



HANDLES FOR PANEL, STILE DOOR LEAVES

METAL-BUD QUBIK handle

Nickel velvet, chrome glossy, white matt, black matt

QUBIK handle nickel, velvet



METAL-BUD BARCELONA handle

Nickel, velvet, glossy chrome, black matt



BARCELONA handle glossy chrome

QUBIK handle chrome glossy

BARCELONA handle nickel, velvet



Nickel, velvet, glossy chrome, white ma, black ma glossy brass for the QUBIK, BARCELONA models



key face plate face plate face plate for toilet door

METAL-BUD ERKADO handles

Inox

FACE PLATE

SAPPHIRE INOX handle



ONYX INOX handle



ROMA INOX handle



face plate inox



METRO INOX handle



NOVA ROUND INOX handle



face plate inox



key face plate inox



PROXIMA INOX SQUARE handle



NOVA ROUND INOX handle



key face plate inox



face plate for toilet door inox



QUBIK handle, black matt



QUBIK handle, white matt

BARCELONA handle, black matt



TOPAZ INOX handle



JOWISZ INOX handle



face plate for toilet door inox



HANDLES FOR PANEL, STILE DOOR LEAVES

METAL-BUD ERKADO handle Black matt TOPAZ black matt handle face plate key face plate face plate for toilet door APRILE handle Glossy chrome, satin chrome,black, gold, gold matt, brass PINA glossy chrome PINA satin chrome PINA black PINA gold PINA gold matt PINA brass handle YUKA glossy chrome YUKA satin chrome YUKA black Face plate Glossy chrome, satin chrome, black, gold, gold matt, brass for the PINA, YUKA models key face plate face plate face plate for toilet door key face plate face plate face plate for toilet door key face plate face plate face plate for toilet door key face plate face plate face plate for toilet door

HANDLES FOR PANEL, STILE DOOR LEAVES

GAMET handle

Brushed chrome, glossy chrome

MISTICO handle glossy chrome



ERBA handle brushed nickel



CASCADA handle brushed nickel



MISTICO handle brushed chrome



ERBA handle antique brass



CASCADA handle antique brass



face plate for key, lock core and for toilet door













face plate for key, lock core and for toilet door













face plate for key, lock core and for toilet door













METAL-BUD JOWISZ INOX handles, long face plate (10 mm thick), spacing 72 mm

NEW

JOWISZ INOX handle Key face plate



JOWISZ INOX handle face plate for toilet door



JOWISZ INOX handle face plate



JOWISZ INOX handle face plate, economy



METAL-BUD TOPAZ INOX handle, long face plate (10 thick), spacing $72~\mathrm{mm}$

Inox

TOPAZ INOX handle Key face plate



TOPAZ INOX handle face plate for toilet door



TOPAZ INOX handle face plate




TOPAZ INOX handle face plate, economy



HANDLES FOR PLATE, STILE LEAVES, WITH LONG FACE PLATE

The handles with a long face plate are not to be used for non-rebated doors

METAL-BUD ASTRA, SYDNAY and QUBIK handles, long face plate, spacing 72 mm

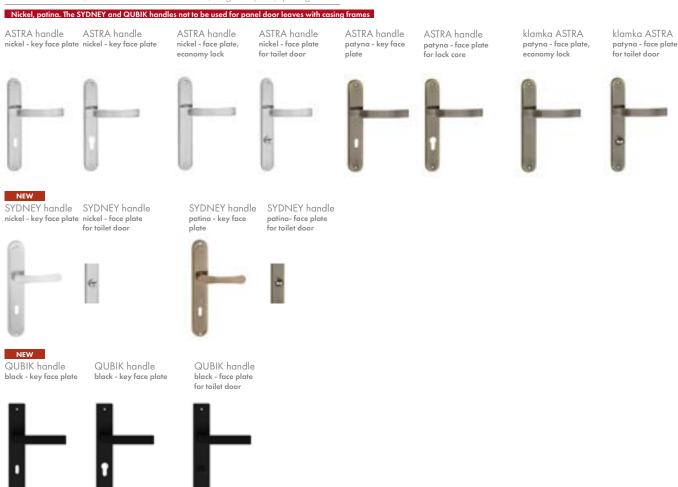

Handle METAL-BUD ERKADO BONN and ESSEN (face plate thickness ESSEN - 10 mm, BONN - 8 mm), spacing 72 mm




LOCK CORE



HOW TO SELECT A LOCK CORE?

Example of calculating the lock core size for the flush and stile doors (40mm) with the face plate thickness of G=7 mm A/B = (C+G+3) / (D+G+3) A/B = (15+7+3) / (25+7+3) A/B = 25/35

| LOCK CORE | |
|-----------|--|
| SIZE | |
| 26/36 | |
| 30/30 | |



| DOOR TYPE | DOOR LEAF THICKNESS | PROPORTION OF LOCK SETTING IN DOOR (C/D) | RECOMMENDED LOCK CORE SIZE (A/B)* | |
|----------------------------|---------------------|--|--------------------------------------|--|
| Flush, stile (rebated) | 40 mm | 15/25 | 26/36 | |
| Flush, stile (non-rebated) | 40 mm | 20/20 | 30/30 | |
| HERSE | 46 mm | 15/31 | 30/45 | |

TECHNICAL INFORMATION

DOOR OPENING DIRECTIONS

DOOR OPENING DIRECTIONS


SINGLE DOOR LEAF

SINGLE DOOR RIGHT DOOR LEAF


REBATED, NON-REBATED, REVERSE DOORS













NON-REBATED

BATED REBA

REBATED

REVERSE

DOUBLE DOORS









HOW TO CALCULATE DOOR PRICE?



AVAILABLE SOLUTIONS













DOOR FACE FINISH TYPES

FINISH

The Finish laminate is pre-impregnated, which means printing and then coating with paint with required properties. Using the performance finishing coats adds to the surface's basic resistance.

GREKO

The Greko laminate is also pre-impregnated, which means printing and then coating with paint with required properties. Using the performance finishing coats adds to the surface's resistance and flexibility of the product. The paint's silicon content ensures the film resistance is enhanced.

The Greko laminate is manufactured on a high density Japanese base layer which is not resin coated. This makes the film ecological, healthy and safe for people and environment both in the production process and during use, as well as for disposal. No formaldehyde or other harmful ingredients is used.

Its distinctive patterns are what distinguishes the Greko film. The laminates bear striking resemblance to wood, as the high quality surface comes with a 3D natural wood effect. Woodgrain decors look just like wood

PREMIUM

The Premium laminate is a product based on Polypropylene (PP), a material of very high resistance to abrasion and scratching, plus top quality appearance. It adds a refined looks and individual character to the doors, as it imitates natural wood perfectly.

Not only does the Premium laminate attracts with its appearance but with its functionality, as it resists scratching better than average products and is fire-retardant and abrasion resistant.

These properties ensure the extended longevity and maintenancefree use of the PREMIUM range products even in most adverse conditions.

EDGE FINISH TYPES

EDGE SOFT



The SOFT door leaf comes with a chamfered edges, which lends an aesthetic and modern look to it. The leaf is finished with a laminate of an improved resistance

to scratching, which dramatically enhances its resistance during use. Okleina v skrzydłach SOFT łączona jest w dwóch miejscach pokazanych na szkicu (nie dotyczy dekoru ŚNIEŻNOBIALEGO GREKO w którym okleina łączona jest wewnątrz felca).

EDGE STANDARD



It involves covering the flat plane with the 0.15 mm ST CPL laminate, CPL 0.2, CPL 0,7 laminates, polypropylene PREMIUM laminate, GREKO laminate or FINISH film. The door leaf made in STANDARD technology has unchamfered edges, which is where the face panel is joined with edging laminate, as shown in the diagram. The laminate in the CPL 0.2 and CPL 0,7 laminates is made of very durable PVC, the so-called ABS. The joining method of the laminate is also identical for the non-rebated doors and non-rebated sliding systems.

ST CPL, CPL 0,2 I CPL 0,7

The CPL laminate is composed of a decorative layer impregnated in resins, and a base layer ensuring flexibility. Following the lamination process, the top resin layer is hardened for high resistance to scratching and abrasion. It is characterised by high resistance to impact, abrasion, scratching, heat and UV radiation Thanks to using this type of material, the door can be installed in so-called "difficult" interiors [exposed to heat, moisture or extraordinary use].

Approx. laminate thickness: ST CPL - 0,15 mm , CPL 0,2 - 0,2 mm and CPL 0 CPL 0,7 - 0,7 mm. The CPL 0.7 laminate is used to cover only one leaf plane thanks to its unique hardness. The CPL 0,2 and CPL 0,7 laminated door leaves come with the leaf edge made of the so-called ABS, a highly durable PVC.

UV VARNISH

The door surface has several coats of the WHITE TITANIUM UV modern UV hardened varnish.

The flat surfaces are covered with a specialist base membrane in the first phase, and then coated twice with a top quality paint and hardened with UV.

The moulded surfaces cannot be covered with the membrane for technological reasons, so they are coated with three paint layers and hardened with UV.

The fully automatic coating process follows scanning to ensure ideal quality of the surface. Hardening the paint with the cutting-edge method involving UV light source ensures very high mechanical resistance.






LEAF DIMENSIONS IN PL STANDARD

STILE DOOR LEAF


PANEL DOOR LEAF

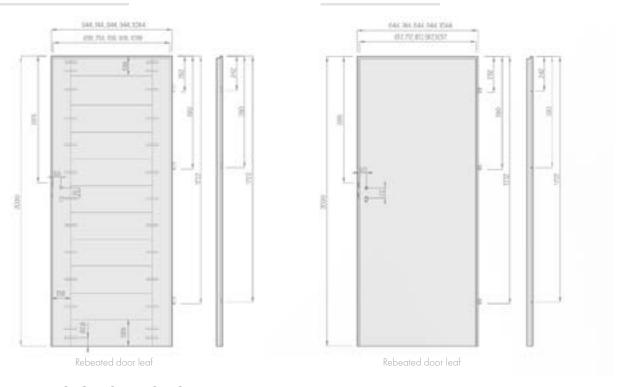


LEAF DIMENSIONS IN CZ STANDARD

STILE DOOR LEAF

PANEL DOOR LEAF

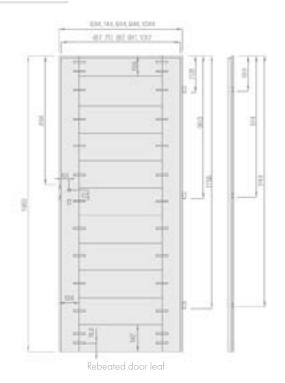

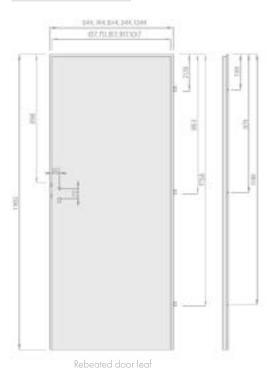




- A MDF or timber stiles in PREMIUM laminate
- B MDF rails



Solid 35 mm or 22 mm thick rail



Aesthetic frameless tongueand-groove glazing without bars



Solid core filling

- A MDF board; B gasket; C HDF board; D filling;
- MDF or timber stiles in Herse SET and UNO PREMIUM

FILLING TYPES

Honeycomb



MDF stile for the GREKO and CPL laminates with the AntiFinger coating NEW



Glulam timber stile for PREMIUM and CPL surfaces without the **AntiFinger** coating




Honeycomb and solid core filling in the panel doors ONLY.


For the flush doors we add a third hinge as standard.

GRAF GLASS PANEL


DIMENSION IN PL STANDARD



DIMENSION IN CZ STANDARD



BATHROOM TURN & RELEASE



Bathroom lock – for turn and release locks, select:

A Corridor; B Bathroom;

OUTSIDE lock - with the bathroom turn and release is fitted to the

Wall

outside of the door (Z)

INSIDE lock - with the bathroom turn and release is fitted to the

inside of the door (W)

NOTE: Directions for the turn and release locks apply (R/L)

METAL CAPS FOR HINGES



Brushed nickel, patina, glossy chrome, glossy brass, white matt and black matt.

Casings dimensions:

- inner diameter 15 mm for panel and stile doors
- length 47 mm

VENTILATION

Plastic sleeves for FINISH colour group















Grilles




GLAZING

STANDARD OBVERSE GLAZING




REVERSE GLAZING MADE TO ORDER



G Plain side; M Ornamented matt side

VENTILATION

Ventilation door cut not available in non-rebated door leaves for wall-mounted and pocket sliding doors.



Square and round metal sleeves





CUTTING THE DOOR LEAVES


Cuing the door leaves to size by customer acc. to Polish standard, up to 50 mm, or up to 80 mm for the HERSE SET door leaves (unless pre-cut), as well as in the panel door leaves, is possible if an additional lower strip has been fied by the manufacturer.

NOTE: cuing the door leaves to size by customer is not allowed for the FRAGI doors, double-leaf and fire doors, non-rebated leaves for sliding systems, glass GRAF doors, FORTECA RC2 and FORTECA RC3 burglar-proof doors, and stile doors acc. to the CZ standard.

The door leaf height made acc. to the so-called CZ standard is lower than the PL standard by 47 mm.

GLAZING

STANDARD "OBVERSE" GLAZING



"REVERSE" GLAZING MADE TO ORDER



G plain side **M** matt side with decoration or colourless side with decoration

GLAZING TRANSLUCENCY ILLUSTRATION



GRAF 1 tempered, painted glass



GRAF 12 tempered, painted glass



GRAF 8 decormat



GRAF 9 transparent



GRAF 26 dark grey



GRAF 29 laminated glass



Tempered glass decormat frosted



2 x 250 ml

Tempered glass transparent




VSG black



frosted

FROSTED AND BLACK VSG 221, 331, 441 LAMINATED GLASS

FOR STILE AND PANEL DOORS



CLEANING, REVITALISATION & REGENERATION KIT FOR OTTIMO DOORS

FOR STILE AND PANEL DOORS

Door Core

ELECTRIC DOOR STRIKE

Available for fixed and adjustable door frames for rebated doors, see p. 161-163, but unavailable for the door frames used with the GRAF glass panes and double-leaf doors.

Types of electric door strikes::

- basic 12V
- basic 24V
- switch operated 12 V

BASIC

Normally closed, and opened when voltage is fed.

SWITCH OPERATED

Same operation as in the basic strike, but with an option to be switched off by moving the springbolt.

REVERSE

Closed when voltage is fed, opened when not.

NON-REBATED HARDWARE

CONCEALED HINGE



MAGNETIC CATCH



ADJUSTABLE MAGNETIC CATCH STRIKE



LEAF FACED WITH DOOR FRAME



NEWCONCEALED HINGE, BLACK



MAGNETIC LOCK BLACK






ADJUSTABLE MAGNETIC CATCH STRIKE, BLACK

HARDWARE

Deadbolt locks



LOCK PZ CENTRES:


- 1. For rebated door leaves, the PZ centre of the key operated deadbolt lock, toilet lock and core lock is 72 mm.
- 2. For non-rebated and reverse door leaves, the PZ centre of the magnetic lock is:
- key and toilet with 90 mm spacing
- lock core spacing 85 mm

The toilet locks have a square-shaped bolt hole:

- PL standard: 4 mm
- CZ standard: 6 mm

INSTALLATION OF FRAME FOR NON-REBATED DOOR FRAMES

Available with FIXED and ADJUSTABLE DOOR FRAMES for REBEAT door, but unavailable with DOOR FRAMES for GRAF Glass panes and double-leaf doors.




- A Drill holes for metal screws of min length 80 mm x Ø6 mm.
- **B** Apart from installation foam, mounting anchors are required when installing the door frame. Drill the holes for screws under the gasket so that it hides them.

SLIDING SYSTEMS

WALL-MOUNTED

WALL-MOUNTED SLIDING DOOR SYSTEM



Price includes: Aluminium track with a cover profile and door stop in the colour of the door leaf and length:

- 210 cm for "100" leaves
- 200 cm for "90" leaves
- 180 cm for "80" leaves
- 150 cm for "70" "60" leaves

Available wall-mounted sliding system sets:

- Track with a cover profile and door stop with gasket (only SP1Nz & SP1Nb)
- Track with a cover profile and tunnel door frame (only for SP2N)
- Track with a cover profile and door stop + tunnel door frame (only SP1Nz & SP1Nb)
- Track with a cover profile and door stop with gasket + tunnel door frame (only SP1Nz & SP1Nb)

HOOK BOLT KEY LOCKS

Glossy chrome, brushed chrome, glossy brass, black matt

Key only in silver. The hook bolt key lock comes with two pull handles to choose



EXTRA CHARGES


- tunnel type adjustable door frame for the price of the adjustable door frame
- hook bolt lock with hardware only for the single system
- oval, rectangular or round pull handle; glossy chrome, brushed chrome, glossy brass, black ma; two pcs. of pull handles per set
- synchronisation simultaneous opening and closing of the door leaves using only one leaf; only for SP2N
- soft closing damper automatic leaf damping during the final closing phase only for SP1Nz and SP1Nb

ROUND, OVAL AND RECTANGULAR PULL HANDLES



WITH DOOR OPENING HOUSING


SPINZ LUB SPINB (LEFT, OBVERSE VERSION)

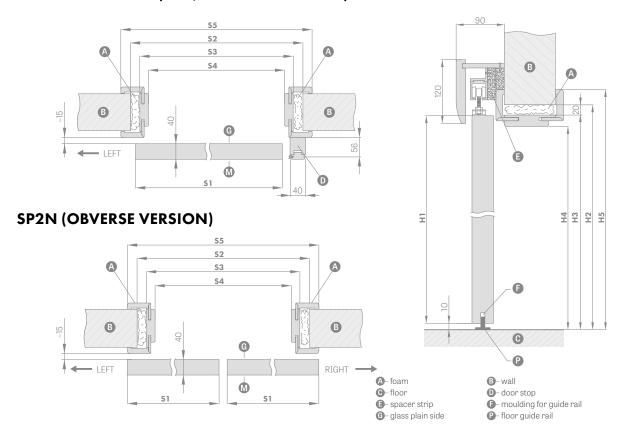

| | | | WALL-MOUNTED SLIDING DOOR SYSTEM WITH DOOR OPENING HOUSING | | | | | | | | | |
|-----|---|-----------|--|-----------|-----------|-----------|-----------|-------------------|-----------|-----------|-----------|--|
| | | | SINGLE-LEAF DOORS | | | | | DOUBLE-LEAF DOORS | | | | |
| | | "60" | "70" | "80" | "90" | "100" | "60"x2 | "70"x2 | "80"x2 | "90"x2 | "60"x2 | |
| S1 | Door leaf width | 644 | 744 | 844 | 944 | 1044 | 1288 | 1488 | 1688 | 1888 | 2088 | |
| \$2 | Opening width in the wall | 688 | 788 | 888 | 988 | 1088 | 1288 | 1488 | 1688 | 1888 | 2088 | |
| \$3 | Frame outer width | 648 | 748 | 848 | 948 | 1048 | 1248 | 1448 | 1648 | 1848 | 2048 | |
| \$4 | Frame opening width | 604 | 704 | 804 | 904 | 1004 | 1204 | 1404 | 1604 | 1804 | 2004 | |
| \$5 | Frame cover width architrave 6 cm/architrave 8cm | 746/786 | 846/886 | 946/986 | 1046/1086 | 1146/1186 | 1346/1386 | 1546/1586 | 1746/1786 | 1946/1986 | 2146/none | |
| Н1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | |
| H2 | Opening height in the wall | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | |
| НЗ | Opening height in the wall for SPN w/o housing | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | |
| H4 | Frame outer height | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | |
| Н5 | Frame cover width architrave 6 cm/architrave 8cm | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/none | |

WITHOUT FRAME COVER

SPINZ LUB SPINB (LEFT, OBVERSE VERSION)

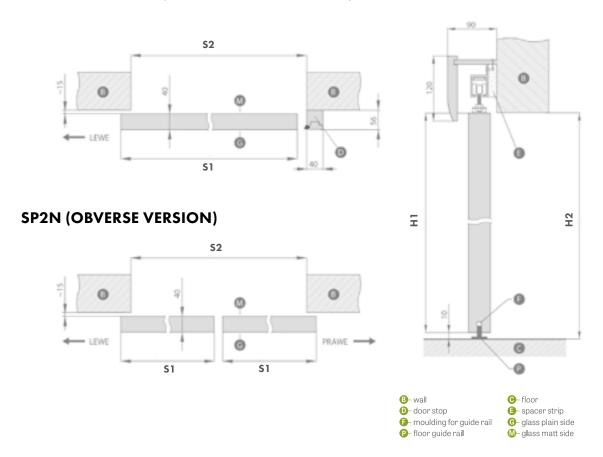

| | | | WALL-MOUNTED SLIDING DOOR SYSTEM WITH FRAME COVER | | | | | | | | | | |
|-----|----------------------------|------|---|------|------|-------|------------------|--------|--------|--------|--------|--|--|
| | | | SINGLE LEAF DOOR | | | | DOUBLE-LEAF DOOR | | | | | | |
| | | "60" | "70" | "80" | "90" | "100" | "60"x2 | "70"x2 | "80"x2 | "90"x2 | "60"x2 | | |
| \$1 | Door leaf width | 644 | 744 | 844 | 944 | 1044 | 1288 | 1488 | 1688 | 1888 | 2088 | | |
| S2 | Opening width in the wall | 602 | 702 | 802 | 902 | 1002 | 1202 | 1402 | 1602 | 1802 | 2002 | | |
| Н1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | | |
| H2 | Opening height in the wall | 2020 | 2020 | 2020 | 2020 | 2020 | 2020 | 2020 | 2020 | 2020 | 2020 | | |

LOFT STANDARD TYPE

SINGLE SLIDING SYSTEM

LOFT STANDARD

Available with all leaves in the SP1N standard wall mounted sliding system.

DOUBLE SLIDING SYSTEM

LOFT STANDARD

Consists of two single systems and a connecting element for rails.

DOUBLE SYSTEM

LOFT STANDARD


Counted as 2 x single system + connecting element for rails. Choice of two brackets holding the leaf: INDUSTRIAL and RETRO



Leaf BALDUR 7, decor WHITE TITAN UV, black rectangular pull handle, brackets INDUSTRIAL

LOFT STANDARD SLIDING DOOR SYSTEM

- OVAL, RECTANGULAR OR ROUND PULL HANDLE
- DOOR CLOSER ON ONE SIDE
- CONNECTOR FOR TRACKS (ENABLES THE USE OF THE LOFT SYSTEM IN THE DOUBLE-LEAF SYSTEM)





| | | | H | | |
|----|-----|---|---|-----|---|
| -0 | - 6 | | | 1_1 | |
| U | V | | 0 | 0 0 | |
| 0 | | | | - | |
| ı | 0 | ¥ | | 0 | ¥ |
| | | | | | 0 |
| | 0 | | 9 | 0 | |

| | | "60" | "70" | "80" | "90" | "100" |
|-----------|----------------------------|------|------|------|------|-------|
| S1 | Door leaf width | 644 | 744 | 844 | 944 | 1044 |
| S2 | Opening width in the wall | 602 | 702 | 802 | 902 | 1002 |
| Н1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 |
| H2 | Opening height in the wall | 1962 | 1962 | 1962 | 1962 | 1962 |
| НЗ | Overall system height | 2170 | 2170 | 2170 | 2170 | 2170 |

| CHIDE RA | All FOR | SINIGIE | CVSTEAA | IENIGTH: |
|----------|---------|---------|---------|----------|

- 200 cm for "60" "70" "80" leaves
- 250 cm for "90" "100" leaves

| | | "60" | "70" | "80" | "90" | "100" |
|------------|----------------------------|------|------|------|------|-------|
| S 1 | Door leaf width | 644 | 744 | 844 | 944 | 1044 |
| S2 | Opening width in the wall | 602 | 702 | 802 | 902 | 1002 |
| S 3 | Guide width | 1500 | 1500 | 2000 | 2000 | 2200 |
| \$4 | Total guide width | 3000 | 3000 | 4000 | 4000 | 4400 |
| Н1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 |
| H2 | Opening height in the wall | 1962 | 1962 | 1962 | 1962 | 1962 |
| НЗ | Overall system height | 2170 | 2170 | 2170 | 2170 | 2170 |

D-door stop

6 moulding for guide rail P-floor guide rail

⊕− floor

Spacer strip

G-glass plain side

M- glass matt side

 $^{^{1.)}}$ The leaf in the closed position overlaps 35 mm on each side

^{2.]} A guide for double-leaf system consists of two guides connected with a connector

LOFT TYPE

LOFT Type wall-mounted sliding door system is available in black and comes complete with the LOFT Type plain door leaf. The LOFT door leaf comes with the stabilising "honeycomb" filling as standard or solid core for extra charge. The door leaf features a non-rebated edge. The system is designed for clear finished opening, without a tunnel.

The complete system includes the sliding LOFT system + LOFT door leaf + pull handle + door closer on one or both side(s).

The double LOFT system is counted as 2 x single system + connecting rail element. Choice of two brackets holding the leaf: INDUSTRIAL and




LOFT, decor OAK ST CPL, round pull handle, RETRO leaf bracket

SLIDING DOOR SYSTEM LOFT (EXTRA CHARGED OPTIONS)

- OVAL, RECTANGULAR OR ROUND PULL HANDLE
- SOLID CORE FILLING
- ROUND AND SQUARE METAL VENTILATION SLEEVES (4 PIECES); BLACK MATT
- DOOR CLOSER ON ONE SIDE
- CONNECTOR FOR TRACKS (ENABLES THE USE OF THE LOFT SYSTEM IN THE DOUBLE-LEAF SYSTEM)
- **BLACK DOOR LEAF EDGE FINISH**





| | | "60" | " 7 0" | "80" | "90" | "100" |
|-----------|----------------------------|------|---------------|------|------|-------|
| \$1 | Door leaf width | 644 | 744 | 844 | 944 | 1044 |
| S2 | Opening width in the wall | 574 | 674 | 774 | 874 | 974 |
| Н1 | Door leaf height | 2150 | 2150 | 2150 | 2150 | 2150 |
| H2 | Opening height in the wall | 2082 | 2082 | 2082 | 2082 | 2082 |



LEAF-HOLDING BRACKETS

GUIDE RAIL LENGTHS:

- 200 cm for "60" "70" "80" leaves
- 250 cm for "90" "100" leaves
- 1.) Plain white laminate imitating a painted surface

ROUND, OVAL, RECTANGULAR PULL HANDLES







^{2.]} special **AntiFinger** coating to reduce dirt and fingerprints

MAGIC TYPE

MAGIC Type wall-mounted sliding door system is available complete with the MAGIC Type plain door leaf only. The MAGIC door leaf comes with the stabilising "honeycomb" filling as standard or solid core for extra charge. The door leaf features a non-rebated edge.

The system is designed for clear finished opening, without a tunnel. The complete system includes the sliding MAGIC system + MAGIC door leaf + pull handle.

The system is only available as a complete set (system + leaf).




MAGIC leaf, decor OAK PREMIUM, oval pull handle

SLIDING DOOR SYSTEM MAGIC (EXTRA CHARGED OPTIONS)

- OVAL, RECTANGULAR OR ROUND PULL HANDLE
- SOLID CORE FILLING
- ROUND AND SQUARE METAL SLEEVES (4 PCS);
 FINISH: BLACK MATT
- BLACK DOOR LEAF EDGE FINISH





| | | "60" | "70" | "80" | "90" | "100" | | | | |
|-------------------------------|---------------------------|------|------|------|------|-------|--|--|--|--|
| \$1 | Door leaf width | 644 | 744 | 844 | 944 | 1044 | | | | |
| \$2 | Opening width in the wall | 584 | 684 | 784 | 884 | 984 | | | | |
| Н1 | Door leaf height | 2150 | 2150 | 2150 | 2150 | 2150 | | | | |
| H2 Opening height in the wall | | 2100 | 2100 | 2100 | 2100 | 2100 | | | | |
| O coall O flagge | | | | | | | | | | |



ROUND, OVAL, RECTANGULAR PULL HANDLES



^{1.)} Plain white laminate imitating a painted surface

Black plain door leaf edge finish (extra charged)

Black transverse door leaf edge finish (extra charged)

 $^{^{2.\!\!\!\!|}}$ Special $\mbox{\bf AntiFinger}$ coating to reduce dirt and fingerprints

GRAF GLASS DOORS



Sliding system for glass doors with a silver anodised aluminium or black matt powder- painted cover.

This system is complete and designed for fiing in a clear finished opening, as the tunnel is not available. The system range includes all GRAF glass panes, see p. 58-59 and go to our website: www.erkado.pl.

The complete system includes: sliding SYSTEM GRAF + glass pane SYSTEM GRAF + pull handle + door closer on one side

| | WALL-MOUNTED GLASS DOOR SLIDING SYSTEM | | | | | | | | | | | |
|------------|--|-----------|------|------|------|--|--|--|--|--|--|--|
| | | "60" | "70" | "80" | "90" | | | | | | | |
| S 1 | Door leaf width | 662 | 762 | 862 | 962 | | | | | | | |
| S2 | Opening width in the wall | 602 | 702 | 802 | 902 | | | | | | | |
| \$3 | Guide rail length | 1500 | 1500 | 1800 | 2000 | | | | | | | |
| H1 | Door leaf height | 2036 | | | | | | | | | | |
| H2 | Opening height in the wall | max. 2020 | | | | | | | | | | |
| НЗ | 3 Overall system height 2114 | | | | | | | | | | | |

GLASS DOOR SLIDING SYSTEM

- silver anode
- black matt

GLASS PANE:

- GRAF 8 System
- GRAF 9 System
- GRAF 1, 6, 11, 17, 22, 26, 32, 35, 36, 38 System

EXTRA CHARGES

- Double-sided round pull handle, stainless steel
- Double-sided round pull handle, stainless steel, black matt
- "90" glass pane extra charge
- Door closer

PULL HANDLE








DOUBLE-LEAF DOORS

REBATED AND NON-REBATED

DOUBLE-LEAF DOORS

- The double-leaf doors are supplied with a solid core filling for extra charge.
- The double-leaf doors are made according to available models of the flush single leaf doors, STILE doors with respective features: colour, finish (STANDARD, SOFT), glazing etc.
- Double-leaf doors available in CPL 0.2 & CPL 0.7
- Passive doors use pull latches.
- Under "60" width passive door available in the full plain version only side panel (see drawing below).
- Side panels are made in the STANDARD edge flush technology. Available
 with the "honeycomb" filling as standard or solid core for extra charge. Grain
 direction of the side panels is vertical.
- Both active and inactive door leaves come with lippings.
- The double-leaf doors in non-rebated technology is available with a magnetic lock only.
- Double non-rebated leaf doors come with an adjustable door frame only.
- Electric door strike is not available for the double-leaf doors.

DOUBLE-LEAF DOOR PRICE:

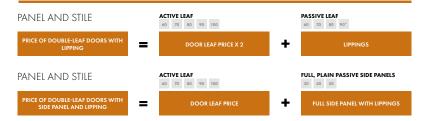

- Prices of fixed and adjustable door frames for double-leaf doors + 30%
- Extra charge for solid core in the extension
- Painted extension only solid core WHITE TITANIUM UV

AVAILABLE DOOR LEAF WIDTHS

- Panel and stile DOUBLE-LEAF DOORS from "120" to "190"** and mixes
- with full plain side panels.




- * Side panel available in standard technology only as a full plain version
- ** For "180" non-rebated doors


^{*} not in the non-rebated door leaves

DOUBLE-LEAF DOORS

NON-REBATED

NON-REBATED DOUBLE-LEAF DOORS WITH ADJUSTABLE **DOOR FRAME**

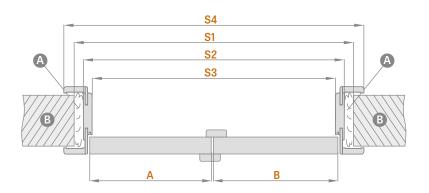





| | ADULCTABLE DOOD ED AME | | NON-REBATED DOUBLE-LEAF DOORS | | | | | | | | | | | |
|-----------------------|--|-----------|-------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|--|
| ADJUSTABLE DOOR FRAME | | "90" | "100" | "110" | "120" | "130" | "140" | "150" | "160" | "170" | "180" | | | |
| A+B | Door leaf width | 988 | 1088 | 1188 | 1288 | 1388 | 1488 | 1588 | 1688 | 1788 | 1888 | | | |
| S 1 | Opening width in the wall | 1061 | 1161 | 1261 | 1361 | 1461 | 1561 | 1661 | 1761 | 1861 | 1961 | | | |
| S2 | Frame outer width | 1021 | 1121 | 1221 | 1321 | 1421 | 1521 | 1621 | 1721 | 1821 | 1921 | | | |
| S3 | Frame opening width | 977 | 1077 | 1177 | 1277 | 1377 | 1477 | 1577 | 1677 | 1777 | 1877 | | | |
| \$4 | Frame cover width architrave 6 cm/architrave 8 cm | 1119/1159 | 1219/1259 | 1319/1359 | 1419/1459 | 1519/1559 | 1619/1659 | 1719/1759 | 1819/1859 | 1919/1959 | 2019/2059 | | | |
| Н1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | | | |
| H2 | Opening height in the wall | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | | | |
| НЗ | Frame outer height | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | | | |
| H4 | Frame opening height | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | | | |
| Н5 | Frame cover width architrave 6 cm/architrave 8 cm | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | 2102/2122 | | | |

DOUBLE-LEAF DOORS - **SYMMETRIC**



DOUBLE-LEAF DOORS - **ASYMMETRIC**



DOUBLE-LEAF DOORS







DOUBLE-LEAF DOORS

REBATED

REBATED DOUBLE-LEAF DOORS

WITH ADJUSTABLE DOOR FRAME









| ABII | ADJUSTABLE BOOD FRAME | | DOUBLE-LEAF DOORS | | | | | | | | | | | |
|-----------------------|--|-----------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|--|
| ADJUSTABLE DOOR FRAME | | "90" | "100" | "110" | "120" | "130" | "140" | "150" | "160" | "170" | "180" | "190" | | |
| A+B | Door leaf width | 988 | 1088 | 1188 | 1288 | 1388 | 1488 | 1588 | 1688 | 1788 | 1888 | 1988 | | |
| S 1 | Opening width in the wall | 1034 | 1134 | 1234 | 1334 | 1434 | 1534 | 1634 | 1734 | 1834 | 1934 | 2034 | | |
| S2 | Frame outer width | 994 | 1094 | 1194 | 1294 | 1394 | 1494 | 1594 | 1694 | 1794 | 1894 | 1994 | | |
| S 3 | Frame opening width | 950 | 1050 | 1150 | 1250 | 1350 | 1450 | 1550 | 1650 | 1750 | 1850 | 1950 | | |
| \$4 | Frame cover width architrave 6 cm/architrave 8 cm | 1092/1132 | 1192/1232 | 1292/1332 | 1392/1432 | 1492/1532 | 1592/1632 | 1692/1732 | 1792/1832 | 1892/1932 | 1992/2032 | 2092/2132 | | |
| Н1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | | |
| H2 | Opening height in the wall | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | | |
| НЗ | Frame outer height | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | | |
| H4 | Frame opening height | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | | |
| H5 | Frame cover width architrave 6 cm/architrave 8 cm | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | 2089/2109 | | |

REBATED DOUBLE-LEAF DOORS



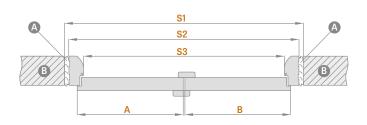





| FIXED DOOR FRAME | | | DOUBLE-LEAF DOORS | | | | | | | | | | | |
|------------------|----------------------------|------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|
| | | "90" | "100" | "110" | "120" | "130" | "140" | "150" | "160" | "170" | "180" | "190" | | |
| A+B | Door leaf width | 988 | 1088 | 1188 | 1288 | 1388 | 1488 | 1588 | 1688 | 1788 | 1888 | 1988 | | |
| S 1 | Opening width in the wall | 1068 | 1168 | 1268 | 1368 | 1468 | 1568 | 1668 | 1768 | 1868 | 1968 | 2068 | | |
| S2 | Frame outer width | 1038 | 1138 | 1238 | 1338 | 1438 | 1538 | 1638 | 1738 | 1838 | 1938 | 2038 | | |
| S3 | Frame opening width | 950 | 1050 | 1150 | 1250 | 1350 | 1450 | 1550 | 1650 | 1750 | 1850 | 1950 | | |
| H1 | Door leaf height | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | 2030 | | |
| H2 | Opening height in the wall | 2077 | 2077 | 2077 | 2077 | 2077 | 2077 | 2077 | 2077 | 2077 | 2077 | 2077 | | |
| НЗ | Frame outer height | 2062 | 2062 | 2062 | 2062 | 2062 | 2062 | 2062 | 2062 | 2062 | 2062 | 2062 | | |
| H4 | Frame opening height | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | | |



COVERT CONCEALED DOOR SYSTEM

OPENING INWARDS AND OUTWARDS



CONSTRUCTION

- Rebated or non-rebated door leaf.
- Wooden stile covered with two HDF boards.
- Honeycomb stabilising filling or solid core filling for an additional charge.

FINISHING

- HDF board covered with PREMIUM laminate, UV paint or a laminate designed for subsequent paint coating or wallpapering.
- Door leaf edge made in rebated or non-rebated technology.

HARDWARE

- Required two mortise hinges in the door frame (third optional, at an extra charge).
- Magnetic lock in the rebated and non-rebated leaf: with a key, thumb turn cylinder, economy or with a blockade.

AVAILABLE DOOR LEAF WIDTHS



ALUMINIUM CONCEALED DOOR FRAME



EXTRA CHARGES

White door frame. 3)

Painted door leaf; WHITE TITANIUM UV.

Solid core filling.

Additional bottom bar in the leaf (can be cut by customer up to max 8 cm).

Round and square metal sleeves (4 pcs); finish: brushed nickel, patina, white and black.

Plastic woodgrain sleeves (4 pcs).

Ventilation door cut or grille.

"100" door leaf.

Drop-down gasket. 4)

¹⁾ Plain white laminate imitating a painted surface.

²⁾ Used for wallpaper hanging and painting.

³⁾ Aluminium colour frame as standard.

⁴⁾ A stop prevents application of a drop-down gasket and vice versa.

⁵⁾ WHITE BASE leaves and aluminium door frame width "70" and "80" available on short lead times – ask your dealer for details.


COVERT CONCEALED DOOR SYSTEM


INWARDS OPENING REBATED DOOR LEAF

REBATED DOOR LEAF


STANDARD DIMENSIONS FOR

INWARDS OPENING REBATED DOOR LEAVES





ALUMINIUM DOOR FRAME CROSS-SECTION




ALUMINIUM CONCEALED DOOR FRAME


| Door leaf width | Construction opening width | Frame outer width | Clear opening width |
|--------------------|----------------------------|----------------------|------------------------|
| Sd (mm) | So (mm) | Sz (mm) | Sp (mm) |
| 620 | 700 | 690 | 605 |
| 720 | 800 | 790 | 705 |
| 820 | 900 | 890 | 805 |
| 920 | 1000 | 990 | 905 |
| 1020 | 1100 | 1090 | 1005 |

| Door leaf height | Construction opening height | Frame outer height | Clear opening height |
|---------------------|-----------------------------------|-----------------------|-------------------------|
| Hd (mm) | Ho (mm) | Hz (mm) | Hp (mm) |
| 2030 | 2079 | 2072 | 2030 |

GYPSUM BOARD INSTALLATION



ENCLOSED IN WALL




COVERT CONCEALED DOOR SYSTEM

OUTWARDS OPENING NON-REBATED DOOR LEAF


NON-REBATED DOOR LEAF

STANDARD DIMENSIONS FOR

OUTWARDS OPENING NON-REBATED DOOR LEAVES

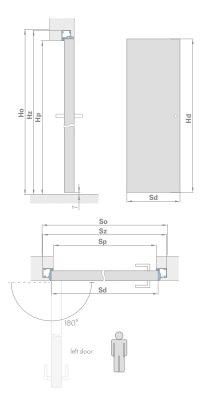


ALUMINIUM DOOR FRAME CROSS-SECTION




| Door leaf width | Construction opening width | Frame outer width | Clear opening width |
|--------------------|----------------------------|----------------------|------------------------|
| Sd (mm) | So (mm) | Sz (mm) | Sp (mm) |
| 620 | 700 | 690 | 605 |
| 720 | 800 | 790 | 705 |
| 820 | 900 | 890 | 805 |
| 920 | 1000 | 990 | 905 |
| 1020 | 1100 | 1090 | 1005 |

| Door leaf height | Construction opening height | Frame outer height | Clear opening height |
|---------------------|-----------------------------------|-----------------------|-------------------------|
| Hd (mm) | Ho (mm) | Hz (mm) | Hp (mm) |
| 2030 | 2069 | 2062 | 2020 |

GYPSUM BOARD INSTALLATION



ENCLOSED IN WALL





DOOR FRAMES

- The adjustable and fixed rebated door frames can be used for all types of ERKADO internal doors made in both flush
 and STILE technologies.
- The adjustable non-rebated door frames can be used for internal doors made in both flush and STILE technologies.
 These door frames are supplied with three concealed hinges.
- The door frame is made with high quality MDF board and covered with durable wood grain film or coated with durable UV paint.
- Depending on the technology, the door frames are laminated with: FINISH, GREKO, CPL, PREMIUM and UV paint.
- The frames for STILE doors have a third hinge as standard.
- Each adjustable and fixed frame comes complete with disassembled frame components, hinges and screws.
 The components are supplied with predrilled holes for fixing.
- Each set is enclosed with assembly manual and warranty certificate.
- The fixed door frame for Herse collection is rectangular and its core is made of glulam timber.

ADJUSTABLE DOOR FRAME REBATED DOOR LEAVES



SOFT FIXED DOOR FRAME REBATED DOOR LEAVES



ADJUSTABLE DOOR FRAME
NON-REBATED DOOR LEAVES



STAND FIXED DOOR FRAME REBATED DOOR LEAVES




STANDARD SQUARE
FOR AN ADJUSTABLE DOOR FRAME



SQUARE WITH EXTENDED TONGUE FOR ADJUSTABLE DOOR FRAME strip 6 cm / strip 8 cm




FIXED DOOR FRAME PL STANDARD




| | "60" | "70" | "80" | "90" | "100" |
|---|------|------|------|------|-------|
| Α | 692 | 792 | 892 | 992 | 1092 |
| В | 604 | 704 | 804 | 904 | 1004 |

ADJUSTABLE DOOR FRAME PL STANDARD




| | "60" | "70" | "80" | "90" | "100" |
|---|---------|---------|---------|-----------|-----------|
| Α | 746/786 | 846/886 | 946/986 | 1046/1086 | 1146/1186 |
| В | 604 | 704 | 804 | 904 | 1004 |

FIXED DOOR FRAME CZ STANDARD



| | "60" | "70" | "80" | "90" | "100" |
|---|------|------|------|------|-------|
| Α | 692 | 792 | 892 | 992 | 1092 |
| В | 604 | 704 | 804 | 904 | 1004 |

ADJUSTABLE DOOR FRAME CZ STANDARD




| | "60" | " 7 0" | "80" | "90" | "100" |
|---|---------|---------------|---------|-----------|-----------|
| Α | 746/786 | 846/886 | 946/986 | 1046/1086 | 1146/1186 |
| В | 604 | 704 | 804 | 904 | 1004 |

FIXED DOOR FRAME FOR DOUBLE-LEAF DOORS PL STANDARD



| | "90" | "100" | "110" | "120" | "130" | "140" |
|---|----------------------|----------------------|----------------------|----------------------|----------------------|-------|
| Α | 1038 | 1138 | 1238 | 1338 | 1438 | 1538 |
| В | 950 | 1050 | 1150 | 1250 | 1350 | 1450 |
| | | | | | | |
| | "150" | "160" | "170" | "180" | "190" | |
| A | "150" 1638 | "160" 1738 | "170" 1838 | "180" 1938 | "190" 2038 | |

ADJUSTABLE DOOR FRAME FOR DOUBLE-LEAF DOORS PL STANDARD




| | "90" | "100" | "110" | "120" | "130" | "140" |
|---|-------------------------------------|--------------------|----------------------------|-----------------------------|-----------------------------|-------|
| Α | 1092/1132 | 1192/1232 | 1292/1332 | 1338 | 1438 | 1538 |
| В | 950 | 1050 | 1150 | 1250 | 1350 | 1450 |
| | | | | | | |
| | "150" | "160" | " 170" | "180" | "190" | |
| A | " 150" 1692/1 <i>7</i> 32 | "160" 1792/1832 | " 170" 1892/1932 | " 180 " 1992/2032 | " 190 " 2092/2132 | |

FOR DOUBLE-LEAF DOORS CZ STANDARD



| | "90" | "100" | "110" | "120" | "130" | "140" |
|---|-------|-------|-------|-------|-------|-------|
| Α | 1038 | 1138 | 1238 | 1338 | 1438 | 1538 |
| В | 950 | 1050 | 1150 | 1250 | 1350 | 1450 |
| | "150" | "160" | "170" | "180" | "190" | |
| Α | 1638 | 1738 | 1838 | 1938 | 2038 | |
| | | 16.50 | 1750 | 18.50 | 19.50 | |


ADJUSTABLE DOOR FRAME FOR DOUBLE-LEAF DOORS CZ STANDARD



| | "90" | "100" | "110" | "120" | "130" | "140" |
|---|-----------|-----------|-----------|-----------|-----------|-----------|
| Α | 1092/1132 | 1192/1232 | 1292/1332 | 1392/1432 | 1492/1532 | 1592/1632 |
| В | 950 | 1050 | 1150 | 1250 | 1350 | 1450 |
| | "150" | "160" | "170" | "180" | "190" | |
| | .50 | 100 | 1/0 | 100 | 1/0 | |
| Α | 1692/1732 | 1792/1832 | 1892/1932 | 1992/2032 | 2092/2132 | |

FIXED DOOR FRAME FOR GLASS DOORS


PL STANDARD



| | "60" | "70" | "80" | "90" |
|---|------|------|------|------|
| Α | 692 | 792 | 892 | 992 |
| В | 604 | 704 | 804 | 904 |

10 mm pin hinge for glass panes frames.


ADJUSTABLE DOOR FRAME FOR GLASS DOORS PL STANDARD



| | "60" | "70" | "80" | "90" |
|---|---------|---------|---------|-----------|
| Α | 746/796 | 846/896 | 946/996 | 1046/1096 |
| В | 604 | 704 | 804 | 904 |


Strip 6cm /strip 8cm 10 mm pin hinge for glass panes frames.

FIXED DOOR FRAME FOR GLASS DOORS CZ STANDARD



| | "60" | "70" | "80" | "90" |
|---|------|------|------|------|
| Α | 692 | 792 | 892 | 992 |
| В | 604 | 704 | 804 | 904 |

ADJUSTABLE DOOR FRAME FOR GLASS DOORS CZ STANDARD



| | "60" | "70" | "80" | "90" |
|---|---------|---------|---------|-----------|
| Α | 746/796 | 846/886 | 946/986 | 1046/1086 |
| В | 604 | 704 | 804 | 904 |

Strip 6cm /strip 8cm.



TUNNEL TYPE ADJUSTABLE DOOR FRAME

REBATED / NON-REBATED

TUNNEL TYPE DOOR FRAMES

The tunnel type door frames are adjustable door frames without any hardware. They are made with a top strip and two vertical strips.

They can be used to finish door openings and safeguard wall corners, but mainly are fitted for interior decoration effects.

The tunnel type adjustable rebated door frames are also used in the ERKADO sliding systems.

The tunnel type adjustable non-rebated door frames are not used in the sliding systems.

Depending on the system, we use the following rebated tunnels:

SLIDING SYSTEM
WALL-MOUNTED DOUBLE



SLIDING SYSTEM WALL-MOUNTED DOUBLE




| | | | | | | ADJUST | ABLE RE | BATED T | UNNELS | ; | | | | |
|--|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | "60" | "70" | "80" | "90" | "100" | "110" | "120" | "130" | "140" | "150" | "160" | "170" | "180" | "190" |
| Opening width in the wall | 688 | 788 | 888 | 988 | 1088 | 1188 | 1288 | 1388 | 1488 | 1588 | 1688 | 1788 | 1888 | 1988 |
| Tunnel outer width | 648 | 748 | 848 | 948 | 1048 | 1148 | 1248 | 1348 | 1448 | 1548 | 1648 | 1748 | 1848 | 1948 |
| Tunnel opening width | 604 | 704 | 804 | 904 | 1004 | 1104 | 1204 | 1304 | 1404 | 1504 | 1604 | 1704 | 1804 | 1904 |
| Frame cover width architraves 6 cm / Architraves 8 cm | 746/ 786 | 846/ 886 | 946/ 986 | 1046/ 1086 | 1146/ 1186 | 1246/ 1286 | 1346/ 1386 | 1446/ 1486 | 1546/ 1586 | 1646/ 1686 | 1746/ 1786 | 1846/ 1886 | 1946/ 1986 | 2046/ 2086 |
| Opening height in the wall | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 | 2060 |
| Tunnel outer height | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 | 2040 |
| Tunnel opening height | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 | 2018 |
| Tuner cover height architrave 6 cm /architrave 8 cm | 2089/ 2109 |


| | | | | | ADJUS | TABLE N | ON-REE | ATED TU | JNNELS | | | | |
|---|----------------------|---------------|---------------|----------------|----------------|----------------|----------------|----------------|---------------|----------------|----------------|----------------|----------------|
| | "60" | "70" | "80" | "90" | "100" | "110" | "120" | "130" | "140" | "150" | "160" | "170" | "180" |
| Opening width in the wall | 713 | 813 | 913 | 1013 | 1113 | 1213 | 1313 | 1413 | 1513 | 1613 | 1713 | 1813 | 1913 |
| Tunnel outer width | 673 | 773 | 873 | 973 | 1073 | 1173 | 1273 | 1373 | 1473 | 1573 | 1673 | 1773 | 1873 |
| Tunnel opening width | 629 | 729 | 829 | 929 | 1029 | 1129 | 1229 | 1329 | 1429 | 1529 | 1629 | 1729 | 1929 |
| Frame cover width architraves 6 cm /Architraves 8 cm | <i>77</i> 1 / 811 | 871/ 911 | 971 / 1011 | 1071 / 1111 | 1171 / 1211 | 1271 / 1311 | 1371 / 1411 | 1471 / 1511 | 1571/ 1611 | 1671 / 1711 | 1771 / 1811 | 1871 / 1911 | 1971 / 2011 |
| Opening height in the wall | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 | 2073 |
| Tunnel outer height | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 | 2053 |
| Tunnel opening height | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 | 2031 |
| Tuner cover height architrave 6 cm /architrave 8 cm | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 | 2102/ 2122 |

REVERSE DOOR FRAME

REVERSE DOOR LEAVES

| DOOR WIDTH | A | В | С | D | E | F | G |
|---------------|------|------|------|------|------|------|------|
| "60" | 624 | 644 | 652 | 696 | 736 | 834 | 791 |
| "70" | 724 | 744 | 752 | 796 | 836 | 934 | 891 |
| "80" | 824 | 844 | 852 | 896 | 936 | 1034 | 991 |
| "90" | 924 | 944 | 952 | 996 | 1036 | 1134 | 1091 |
| "100" | 1024 | 1044 | 1052 | 1096 | 1136 | 1234 | 1191 |






A foam


B wall

G floor


D r


rubber gasket





max






- The frame for reverse leaves is available as a standard with 8 cm angle joined at 45 degrees.
- Available decors within the colour group: GREKO, PREMIUM, CPL and WHITE TITANIUM UV varnish.
- 120 mm extension for reversible laminate and lacquered frame.
- Door frame lacquered in WHITE TITANIUM UV, is also available with 8 cm angle joined at 90 degrees at an extra charge (not available for 75-95 mm)
- Movable square with 2 cm longer tongue and standard square for adjustable frames with all laminates and lacquered.
- The door frame above 255 mm is composed of two parts.

ADJUSTABLE DOOR FRAME

NON-REBATED DOOR LEAVES

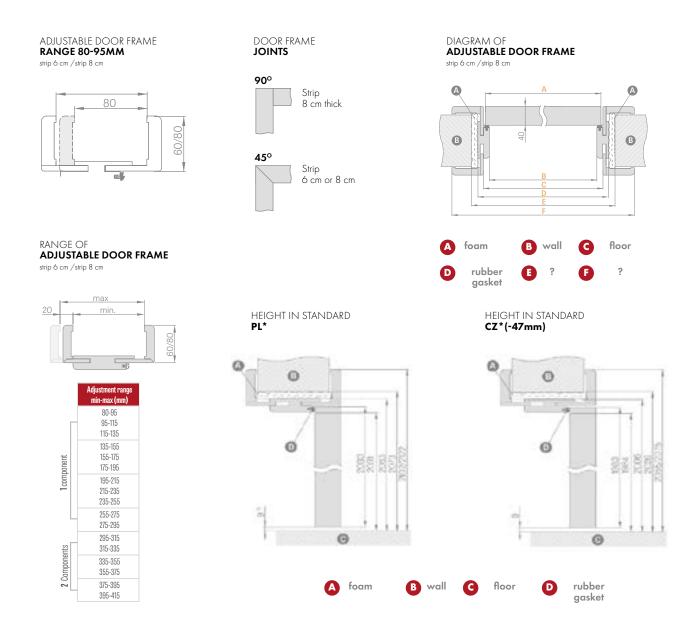


- Joints at 90 degrees possible for door frames with the 8 cm architraves only. Extra charge for frame joints at 90°
- The door frame above 295 mm is composed of two parts
- Prices of adjustable door frames for double-leaf doors + 30%.
- Extension 120 mm for non-rebated frame, laminated and CPL 0.2 and lacquered.

- Movable square with 2 cm longer tongue and standard square for adjustable frames with all laminates CPL 0.2 and lacquered.
- Tunnel type door frame for widths of 60, 70, 80, 90, 100 are at the price of the adjustable rebated door frame.
- Tunnel type door frame for widths of 110, 120, 130, 140, 150, 160, 170, 180, 190 are at the price of the adjustable door frame for rebated double leaf doors.

FIXED DOOR FRAME


REBATED DOOR LEAVES











Price for a set of 2 pcs. x 213.5 cm and 1 pc. x 112 cm (for door leaves from "60" to "90") Price for a set of 3 pcs. x 213.5 cm (for door leaves from "100" to "190")

QUARTER ROUND



Price for a set of z pcs. x z 11.5 cm and 1 pc. x 105.5 cm (for door leaves from "60" to "90") Price for a set of 3 pcs. x 211.5 cm (for door leaves from "100" to "190")

ELECTRIC DOOR STRIKE

SKIRTING BOARD length 2,40 mb


laminated lacquered




- The skirting board is made of moisture resistant MDF board. Available variants: WHITE TITANIUM UV paint, laminates: GREKO, ST CPL, PREMIUM and in base laminate to be paint coated.
- · Fitting method: bonding to wall

Price for a set of 2 pcs. x 214.5 cm and 1 pc. x 112 cm (for door leaves from "60" to "80") Price for a set of 3 pcs. x 214.5 cm (for door leaves from "90" to "180")

SOFT AND STAND FIXED DOOR FRAME DIAGRAM





¹⁾ allowable deviation due to frame dimensional tolerance of +- 3 mm (we recommend to check before installation)

| Door width | A | В | C | D | E |
|------------|------|------|------|------|------|
| "60" | 644 | 618 | 604 | 692 | 722 |
| "70" | 744 | 718 | 704 | 792 | 822 |
| "80" | 844 | 818 | 804 | 892 | 922 |
| "90" | 944 | 918 | 904 | 992 | 1022 |
| "100" | 1044 | 1018 | 1004 | 1092 | 1122 |
| "110" | 1144 | 1118 | 1104 | 1192 | 1222 |

- Fixed door frame for double-leaf doors + 30%
- Non-rebated fixed door frame NA
- The fixed frame, architrave and clip-on square in CPL 0.2 are also used in the set for door leaves in CPL 0.7

A foam B wall G floor D rubber gasket

· Black striker plate only available for GRAF glass door frames

ADJUSTABLE DOOR FRAME

REBATED DOOR LEAVES


ADJUSTABLE DOOR FRAME

above 280 mm



RANGE OF ADJUSTABLE DOOR FRAME

above 280 mm




DOOR FRAME **JOINTS**





DIAGRAM OF ADJUSTABLE DOOR FRAME

strip 6 cm / strip 8 cm




| DOOR WIDTH | A | В | С | D | E | F | G |
|---------------|------|------|------|------|------|------|--------------|
| "60" | 644 | 618 | 604 | 626 | 648 | 688 | 746*/786** |
| "70" | 744 | 718 | 704 | 726 | 748 | 788 | 846*/886** |
| "80" | 844 | 818 | 804 | 826 | 848 | 888 | 946*/986** |
| "90" | 944 | 918 | 904 | 926 | 948 | 988 | 1046*/1086** |
| "100" | 1044 | 1018 | 1004 | 1026 | 1048 | 1088 | 1146*/1186** |

^{*} strip 6 cm / ** strip 8 cm

HEIGHT IN PL*STANDARD

HEIGHT IN **CZ***STANDARD (-47mm)



| gask | foam | B wall | C floor | D rubb gask |
|------|------|--------|----------------|----------------|
|------|------|--------|----------------|----------------|


1.) allowable deviation due to frame dimensional tolerance of +- 3 mm (we recommend to check before installation)

ADJUSTMENT RANGE

MIN-MAX (MM)

| | Adjustment range min-max (mm) |
|--------------|-------------------------------|
| | 80-100 |
| | 100-120 |
| | 120-140 |
| | 140-160 |
| neut | 160-180 |
| component | 180-200 |
| - 8 | 200-220 |
| | 220-240 |
| | 240-260 |
| | 260-280 |
| | 260-300 |
| | 280-300 |
| £ | 300-320 |
| oone | 320-340 |
| 2 components | 340-360 |
| 2 | 360-380 |
| | 380-400 |
| 3 components | 400-420 |

- Joints at 90 degrees possible for door frames with the 8 cm strips only.
- Additional charge for joining at 90 degrees.
- Electric door strike.
- Door closer reinforcement.
- Prices of fixed and adjustable door frames for double-leaf doors + 30 %.
- Movable square with 2 cm longer tongue and standard square for adjustable frames with all laminates CPL 0.2 and lacquered dotyczy rozwiązania opaska 6 cm i opaska 8 cm.
- Extension 120 mm for adjustable frame, laminated and CPL 0.2 and lacquered.
- Possibility to make door frames ranging between 0 and 520 mm an additional charge for each 2 cm.
- Tunnel type door frame for both rebated and non-rebated door widths of 60, 70, 80, 90, 100 are at the price of the rebated adjustable door frames.
- Tunnel type door frame for both rebated and non-rebated door widths of 110, 120, 130, 140, 150, 160, 170, 180, 190 are at the price of the adjustable door frame for rebated double-leaf doors

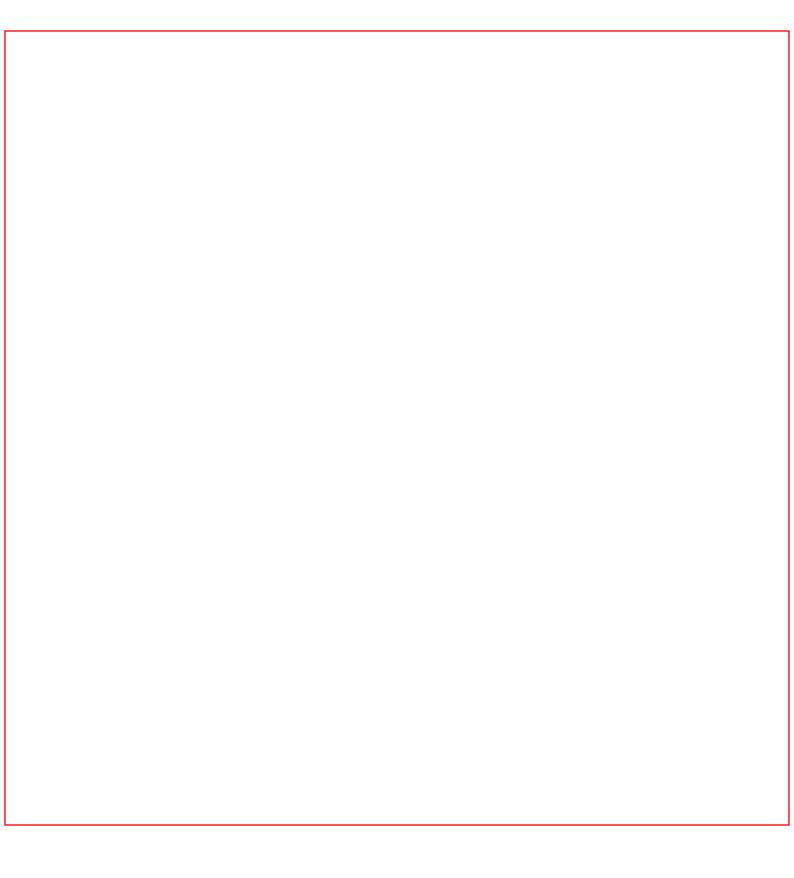







Ecowin binnendeuren 2023.